




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B01L 7/00, C12Q 1/68, H01L 35/28, F25B 21/02, G01R 27/20		A3	(11) International Publication Number: WO 98/43740
			(43) International Publication Date: 8 October 1998 (08.10.98)
(21) International Application Number: PCT/US98/06189		(74) Agent: AKER, David; The Perkin-Elmer Corporation, Mail Stop 199, 761 Main Avenue, Norwalk, CN 06859 (US).	
(22) International Filing Date: 30 March 1998 (30.03.98)			
(30) Priority Data: 60/041,754 28 March 1997 (28.03.97) US 60/046,122 9 May 1997 (09.05.97) US		(81) Designated States: AU, BR, CA, CN, IL, JP, KR, NZ, RU, SG, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(71) Applicant (for all designated States except US): THE PERKIN-ELMER CORPORATION [US/US]; 761 Main Avenue, Norwalk, CT 06859-0199 (US).		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	
(72) Inventors; and (75) Inventors/Applicants (for US only): ATWOOD, John, G. [US/US]; 149 Limekiln Road, West Redding, CT 06896 (US). FAWCETT, Adrian [US/US]; 112 Spring Hill Av- enue, Norwalk, CT 06850 (US). FERRARA, Keith, S. [US/US]; 383 Woodstock Avenue, Stratford, CT 06497 (US). HETHERINGTON, Paul, M. [US/US]; #103 10 Wild Oaks Road, Goldens Bridge, NY 10526 (US). NOREIKS, Richard, W. [US/US]; 5300 Main Street, Stratford, CT 06497 (US). OLSEN, Douglas, E. [US/US]; 30 Lake Drive South, New Fairfield, CT 06812 (US). WIDOMSKI, John, R. [US/US]; 10 Serene Drive, Shelton, CT 06484 (US). WITTMER, Charles, M. [US/US]; 15 Clarion Place, Trum- bull, CT 06611 (US).		(88) Date of publication of the international search report: 17 December 1998 (17.12.98)	

(54) Title: IMPROVEMENTS IN THERMAL CYCLER FOR PCR

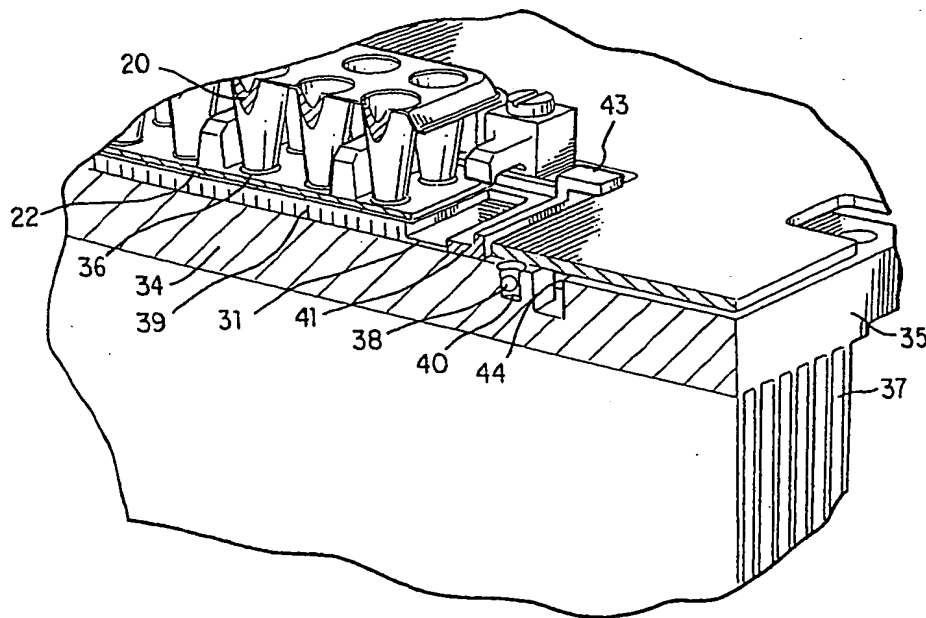

(57) Abstract

An instrument for performing highly accurate PCR employing an assembly, a heated cover and an internal computer. The assembly is made up of a sample block (36), a number of Peltier thermal electric devices (39) and heat sink (34), clamped together. The sample block (36) temperature is changed exclusively by the thermoelectric devices (39) controlled by the computer. The sample block (36) is of low thermal mass and is constructed of silver. The Peltier devices are designed to provide fast temperature excursions over a wide range. The heat sink (34) has a perimeter trench (44) to minimize edge losses and is adjacent to a continuously variable fan. A perimeter heater is used to improve the thermal uniformity across the sample block (36) to approximately $\pm 0.2^\circ\text{C}$.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

IMPROVEMENTS IN THERMAL CYCLER FOR PCR

FIELD OF THE INVENTION

This invention pertains to the field of computer controlled instruments for performing the Polymerase Chain Reaction (PCR). More particularly, the invention pertains to automated instruments that perform the reaction simultaneously on many samples and produce very precise results by using thermal cycling.

BACKGROUND OF THE INVENTION

The background of the invention is substantially as stated in U.S. Patent No. 5,475,610 which is herein incorporated by reference.

To amplify DNA (Deoxyribose Nucleic Acid) using the PCR process, it is necessary to cycle a specially constituted liquid reaction mixture through several different temperature incubation periods. The reaction mixture is comprised of various components including the DNA to be amplified and at least two primers sufficiently complementary to the sample DNA to be able to create extension products of the DNA being amplified. A key to PCR is the concept of thermal cycling: alternating steps of melting DNA, annealing short primers to the resulting single strands, and extending those primers to make new copies of double-stranded DNA. In thermal cycling the PCR reaction mixture is repeatedly cycled from high temperatures of around 90°C for melting the DNA, to lower temperatures of approximately 40°C to 70°C for primer annealing and extension. Generally, it is desirable to change the sample temperature to the next temperature in the cycle as rapidly as possible. The chemical reaction has an optimum temperature for each of its stages. Thus, less time spent at non optimum temperature means a better chemical result is achieved. Also a minimum time for holding the reaction mixture at each incubation temperature is required after each said incubation temperature is reached. These minimum incubation times establish the minimum time it takes to complete a cycle. Any time in transition between sample incubation temperatures is time added to this minimum cycle time. Since the number of cycles is fairly large, this

additional time unnecessarily heightens the total time needed to complete the amplification.

In some previous automated PCR instruments, sample tubes are inserted into sample wells on a metal block. To perform the PCR process, the temperature of the metal block is cycled according to prescribed temperatures and times specified by the user in a PCR protocol file. The cycling is controlled by a computer and associated electronics. As the metal block changes temperature, the samples in the various tubes experience similar changes in temperature. However, in these previous instruments differences in sample temperature are generated by non-uniformity of temperature from place to place within the sample metal block. Temperature gradients exist within the material of the block, causing some samples to have different temperatures than others at particular times in the cycle. Further, there are delays in transferring heat from the sample block to the sample, and those delays differ across the sample block. These differences in temperature and delays in heat transfer cause the yield of the PCR process to differ from sample vial to sample vial. To perform the PCR process successfully and efficiently, and to enable so-called quantitative PCR, these time delays and temperature errors must be minimized to the greatest extent possible. The problems of minimizing non-uniformity in temperature at various points on the sample block, and time required for and delays in heat transfer to and from the sample become particularly acute when the size of the region containing samples becomes large as in the standard 8 by 12 microtiter plate.

Another problem with current automated PCR instruments is accurately predicting the actual temperature of the reaction mixture during temperature cycling. Because the chemical reaction of the mixture has an optimum temperature for each of its stages, achieving that actual temperature is critical for good analytical results. Actual measurement of the temperature of the mixture in each vial is impractical because of the small volume of each vial and the large number of vials.

SUMMARY OF THE INVENTION

According to the invention, there is provided an apparatus for performing the Polymerase Chain Reaction comprising an assembly capable of cycling samples through a series of temperature excursions, a heated cover and a computer to control the process.

The invention further encompasses a sample block with low thermal mass for rapid temperature excursions. The sample block is preferably manufactured from silver for uniform overall heat distribution and has a bottom plate for uniform lateral heat distribution. In addition, to further offset heat losses and resulting temperature gradients from the center to the edges, a center pin is used as a conducting path to a heat sink.

The invention also provides a method and apparatus for achieving rapid heating and cooling using Peltier thermoelectric devices. These devices are precisely matched to each other. They are constructed using die cut alumina on one side to minimize thermal expansion and contraction. The devices are constructed of bismuth telluride using specific dimensions to achieve matched heating and cooling rates. They are designed using minimal copper thicknesses and minimal ceramic thicknesses to further reduce their heat load characteristics and are assembled using a specific high temperature solder in specified quantities.

The invention is also directed to a heatsink constructed with a perimeter trench to limit heat conduction and losses from its edges. Furthermore, the heatsink has an associated variable speed fan to assist in both maintaining a constant temperature and in cooling.

The invention is also directed to a clamping mechanism to hold the sample block to the heat sink with the thermoelectric devices positioned in between. The mechanism is designed to provide evenly distributed pressure with a minimal heat load. The design allows the use of thermal grease as an interface between the sample block, and the thermoelectric devices and between the thermoelectric devices and the heatsink.

There is also provided a perimeter heater to minimize the thermal non-uniformity across the sample block. The perimeter heater is positioned around the sample block to counter the heat loss from the edges. Power is applied to the heater in proportion to the

sample block temperature with more power applied when the sample block is at higher temperatures and less power applied when the sample block is at lower temperatures.

There is also provided a heated cover, designed to keep the sample tubes closed during cycling and to heat the upper portion of the tubes to prevent condensation. The heated cover applies pressure on the sample tube cap perimeter to avoid distorting the cap's optical qualities. The cover is self-aligning, using a skirt which mates with a sample tube tray.

The invention is also directed to a method and apparatus for determining an ideal temperature ramp rate which is determined so as to take advantage of sample block temperature overshoots and undershoots in order to minimize cycle time.

The invention also includes a method and apparatus for characterizing the thermal power output from the thermal electric cooling devices to achieve linear temperature control and linear and non-linear temperature ramps.

The invention is further directed to a method for predicting the actual temperature of the reaction mixture in the sample vials at any given time during the PCR protocol.

The invention also includes a method and apparatus for utilizing calibration diagnostics which compensate for variations in the performance of the thermoelectric devices so that all instruments perform identically. The thermal characteristics and performance of the assembly, comprised of the sample block, thermal electric devices and heatsink, is stored in an on-board memory device, allowing the assembly to be moved to another instrument and behave the same way.

The invention further includes a method and apparatus for measuring the AC resistance of the thermoelectric devices to provide early indications of device failures.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a cross sectional view of a portion of the sample block according to the invention.

Figure 2 is an enlarged, isometric view of a thermal electric device constructed according to the invention.

Figure 2A is a side, elevational view of a thermal electric device constructed according to the invention.

Figure 3 is a cut-away, partial, isometric view of the heatsink according to the invention.

Figure 4 is an exploded view of an assembly including a sample block, thermoelectric devices and heatsink.

Figure 5 is an isometric view of the heated cover in accordance with the invention .

Figure 6 is a chart depicting the Up Ramp (heating rate) vs. Power.

Figure 7 is a chart depicting the Down Ramp (cooling rate) vs. Power.

Figure 8 is a chart for predicting and compensating for temperature overshoots and undershoots in accordance with the invention.

Figure 9 is a block diagram of the AC resistance measurement circuit of the invention.

Figure 10 shows a perimeter heater and its location surrounding the sample block.

Figure 11 is a detailed view of the perimeter heater of Figure 10.

Figure 12 shows the power applied to the perimeter heater as a function of the temperature of the sample block.

Figure 13 shows a thermal model of a sample in a sample vial.

Figure 14 is an illustration of the initial conditions of the thermal model of Figure 13.

Figure 15 shows the sample block and a seal designed to protect the thermal electric devices from the environment.

DETAILED DESCRIPTION OF THE INVENTION

Generally, in the case of PCR, it is desirable to change the sample temperature between the required temperatures in the cycle as quickly as possible for several reasons. First the chemical reaction has an optimum temperature for each of it's stages and as such less time spent at non-optimum temperatures means a better chemical result is achieved. Secondly a minimum time is usually required at any given set point which sets a minimum cycle time for each protocol and any time spent in transition between set points adds to this minimum time. Since the number of cycles is usually quite large, this transition time can significantly add to the total time needed to complete the amplification.

The absolute temperature that each reaction tube attains during each step of the protocol is critical to the yield of product. As the products are frequently subjected to quantitation, the product yield from tube to tube must be as uniform as possible and therefore both the steady-state and dynamic thermal uniformity must be excellent across the block.

Heat-pumping into and out of the samples is accomplished by using Peltier thermoelectric devices. These are constructed of pellets of n-type and p-type bismuth telluride connected alternately in series. The interconnections between the pellets is made with copper which is bonded to a substrate, usually a ceramic (typically alumina).

The amount of heat-pumping required is dependent on the thermal load and the ramp rate, that is, the rate at which the temperature is required to change. The sample tube geometry and sample volumes are not variables as the sample tubes are established as an industry standard, fitting into many other types of instruments such as centrifuges. The sample volume is defined by user need. Therefore the design variables primarily affect the sample block, thermoelectric devices, heatsink, fan and the thermal interface media between the thermoelectric devices and both the heatsink and the sample block.

The block geometry must also meet the necessary thermal uniformity requirements because it is the primary contributor to lateral conduction and therefore evens out any variation in thermal uniformity of the thermoelectric coolers themselves. The conflicting requirements of rapid ramp rates (indicating low thermal mass) and high lateral conduction (indicating a large material mass) are met by concentrating the bulk of the block structure in a base plate, and minimizing the thermal mass of the upper portion of the block which holds the sample tubes. The optimal material for block fabrication is pure silver which has relatively low thermal mass and very good thermal conduction. Silver also lends itself well to electroforming. In practice the optimal block geometry has a light electroformed upper portion to hold the sample tubes fixed to a relatively thick base plate which provides lateral conduction. The thermal mass of the block is concentrated in the base plate where the material contributes the most to thermal uniformity. The electroformed portion of the block has a minimum thickness which is defined by two parameters: first, the material cannot be so thin as to make it too delicate

for normal handling; second, the wall thickness is required to conduct heat out of the upper regions of the sample tube. Circulation in the sample itself is achieved by convection inside the tube and sample temperature is relatively uniform along the height of the tube, but good thermal conductivity between the tube walls and the base plate increases the effective surface area available for conduction of heat between the sample and the base plate. The base plate thickness has a minimum value defined by lateral conduction requirements which is a function of the thermal uniformity of the thermoelectric coolers and structural rigidity.

Another contributor to the thermal mass is the alumina ceramic layers which form part of the structure of the thermoelectric cooler itself. There are two alumina layers in the construction of the thermoelectric cooler, one on the sample block side and another on the heatsink side. The thickness of the layers should be minimized as much as possible, in this case the practical limit of thinness for the alumina thickness is defined by the manufacturing requirements of thermoelectric cooler fabrication. This particular layer of ceramic could in principal be replaced by a different layer altogether such as a thin sheet of Kapton which would reduce the thermal mass even more, but at the present time although coolers are available with this structure, reliability is unproven. It is anticipated that once the technology has been developed further, then a cooler of such a design may be preferred. However, the thin alumina layers also contribute to system reliability.

The copper conductors within the cooler are a significant thermal load and are not overlooked in the design of the system. The thickness of the copper traces is defined by the requirement of carrying current through the device. Once the current is known the required copper thickness can be calculated.

Sample Block

Figure 1 shows a cross sectional view of a portion of the sample block 36 which typically has 96 wells 20, each for receiving a sample vial. The sample block is constructed of silver and comprises an upper support plate 21 and the sample wells 20 electroformed as one piece fastened to a base plate 22. The base plate 22 provides lateral conduction to compensate for any difference in the thermal power output across the

surface of each individual thermal electric device and for differences from one thermal electric device to another.

There are always boundary losses in any thermal system. In a rectangular configuration there is more heat loss in the corners. One solution is to use a round sample block, but the microtiter tray format that is in common usage is rectangular and this must be used to retain compatibility with other existing equipment. Once the edge effects have been eliminated using all standard means, such as insulation etc., there remains a tendency for the center of the sample block to be warmer than the corners. Typically it is this temperature difference that defines the thermal uniformity of the sample block. In accordance with the invention, the center temperature is reduced by providing a small thermal connection from the center of the sample block to the heat sink. By using a pin 24 which acts as a "heat leak" in the center of the sample block, the temperature gradient across the sample block can be reduced to an acceptable level. The amount of conduction required is quite small and a 1.5mm diameter stainless steel pin has been found to be sufficient. Moreover, a pin made of the polymer ULTEM, manufactured by General Electric may also be used. As more fully described below, the pin also serves to help position and lock into place components of the assembly illustrated in Figure 4.

Peltier Thermal Electric Devices (TED's)

Thermal uniformity of the sample block is critical to PCR performance. One of the most significant factors affecting the uniformity is variations in the thermal electric device performance between devices. The most difficult point at which to achieve good uniformity is during a constant temperature cycle far from ambient. In practice this is a constant temperature cycle at approximately 95°C. The thermal electric devices are matched under these conditions to make a set of devices for each heatsink assembly which individually produce the same temperature for a given input current. The thermal electric devices are matched to within 0.2°C in any given set, this value being derived from the maximum discrepancy that can be rectified by the lateral conduction of the sample block baseplate.

Figure 2A shows a side view of a typical Peltier thermal electric device 60. The device is composed of bismuth telluride pellets 30, sandwiched between two alumina layers 26. The pellets are electrically connected by solder joints 28 to copper traces 29 plated onto the alumina layers. One alumina layer has an extension 31 to facilitate electrical connections. The thickness of the extended areas is reduced to decrease the thermal load of the device.

Figure 2 shows an isometric view of a typical Peltier thermal electric device. The alumina layer 26 that forms the outer wall of the thermal electric device, expands and contracts during temperature cycling at a different rate than the sample block 19. The motion of the alumina is transmitted directly to the solder 28 connecting the internal bismuth telluride pellets 30. This motion can be reduced dramatically by cutting the alumina into small pieces 32 called die so that the field of expansion is small. The minimum size of the die is defined by the size of the copper traces required to carry current through the thermal electric device and the requirements that the device retain some strength for handling.

Using thin alumina layers in the thermal electric device (of the order of 0.508 mm) not only reduces the thermal load but also means that for a given required heat pumping rate the temperature that the ends of the pellet reaches is reduced due to the increase in thermal conductivity k . This enhances reliability by reducing the thermal stress on the solder joint.

Generally in PCR the reaction temperatures are above ambient and in the range 35 to 96°C. In the most important cases the block is heated or cooled between two above ambient temperatures where the flow of heat due to conduction is from the block to the heat sink. The key to optimizing the system cycle time, given an optimized block configuration, is to balance the boost to the ramp rate when cooling provided by the conduction, against the boost provided to the heating ramp rate by the Joule effect of resistance heating.

If the cross-section of the bismuth telluride pellets in a given thermal electric device were considered constant, the heating ramp rate would be increased by increasing the height of the pellet. This is because the conduction path through the thermal electric

device would be made longer thereby decreasing k . This also has the effect of reducing the current required to maintain a given block temperature in the steady state. During the down ramp, i.e. cooling the block, the decreased k means that the conduction contribution will be reduced and so the down ramp rate will be reduced.

Conversely, if the height of the bismuth telluride pellet were to be decreased for a given cross-section, then k would be increased. This would increase the current required to maintain an elevated temperature in the steady state and would increase the cooling ramp rate. Heating ramp rates would be reduced as a larger portion of the heat in the block would be conducted directly to the heat sink. Decreasing the bismuth telluride pellet height also increases the holding power required for a given temperature due to the losses through the thermal electric devices and reduces the thermal load, increasing the maximum possible ramp rate for given power. Therefore the optimized thermal electric device can be derived by adjusting the height of the Bismuth Telluride pellets until the heating rate matches the cooling rate.

The ratio $l:A$ for the pellets also defines the resistance of the device i.e.

$$R = nr(h/A)$$

where n is the number of pellets, r is the resistivity of the Bismuth Telluride being used, h is the height of the pellet and A is the cross-sectional area.

The resistance must be measured as an AC resistance because of the Seebeck effect. Because the geometry defines the resistance of the device, another design boundary is encountered in that the device must use a cost effective current to voltage ratio because too high a current requirement pushes up the cost of the amplifier. The balanced solution for the silver electroformed block described above is :

Pellet height = 1.27mm

Pellet cross-sectional area = 5.95mm²

If the thermal cyler was to be used as part of another instrument, e.g. integrated with detection technology, then it may be more convenient to use a different current source which would lead to a modified thermal electric device geometry. The current source in the present embodiment consists of a class D type switch-mode power amplifier with a current sending resistor in series with the device and ground.

Because the thermal electric devices are soldered together, excess solder can wick up the side of the bismuth telluride pellets. Where this occurs, k is increased which results in a local cold spot, also called a mild spot. These cold spots are reduced in number and severity by application of the minimum amount of solder during the assembly process of the thermal electric device. For the same reason, it is also necessary to ensure that the solder used to attach the connecting wires to the thermal electric device does not contact the pellet

High temperature solder has been shown to not only have improved high temperature performance but it is also generally more resistant to failure by stress reversals and hence is most appropriate in this application. The solder used in this invention may be of the type as described in U.S. Patent 5,441,576.

Heatsink

Figure 3 shows the heatsink 34 assembled with the thermal electric devices 39 and the sample block 36. A locating frame 41 is positioned around the thermal electric devices to align them with the sample block and the heatsink to ensure temperature uniformity across the sample block. The frame is composed of Ultem or other suitable material and has tabs 43 at its corners to facilitate handling. The heatsink 34 has a generally planer base 34 and fins 37 extending from base 35. The thermal mass of the heat sink is considerably larger than the thermal mass of the sample block and samples combined. The sample block and samples together have a thermal mass of approximately 100 joules/°K and that of the heat sink is approximately 900 joules/°K. This means that the sample block clearly changes temperature much faster than the heat sink for a given amount of heat pumped. In addition the heat sink temperature is controlled with a variable speed fan as shown in Figure 9). The temperature of the heat sink is measured by

a thermistor 38 placed in a recess 40 within the heatsink and the fan speed is varied to hold the heat sink at approximately 45°C which is well within the normal PCR cycling temperature range, where maintaining a stable heat sink temperature improves the repeatability of system performance. When the block temperature is set to a value below ambient then the heat sink is set to the coolest achievable temperature to reduce system power consumption and optimize block thermal uniformity. This is accomplished simply operating the fan at full speed.

The heat sink temperature measurement is also used by the thermal electric device control algorithm described below in linearizing the thermal output power from the thermal electric devices.

The heatsink temperature uniformity is reflected in the uniformity of the block temperature. Typically the heatsink is warmer in the middle than it is at the edges and this adds to other effects that lead to the corners of the block being the coldest. A trench 44 is cut into the heat sink outside the perimeter of the thermal electric device area to limit the conduction of heat and decreases edge losses from the area bounded by the trench.

Thermal Interface and Clamping Mechanism

Thermal electric device manufacturers recommend that thermal electric devices be held under pressure to improve life-expectancy. (The pressure recommended is often defined by the thermal interface media selected.) The pressure that is recommended varies from manufacturer to manufacturer but is in the range of 30 to 100 psi for cycling applications.

There are many thermal interface media available in sheet form which can be used to act as a compliant layer on each side of the thermal electric devices, but it has been demonstrated that thermal grease gives far superior thermal performance for this application. Unlike other compliant sheets which have been shown to require 30 psi or more even under optimal conditions. Thermal grease does not require high pressure to ensure that good thermal contact has been made. Also thermal grease acts as an effective lubricant between the expanding and contracting silver block and the thermal electric

device surface, enhancing life-expectancy. Thermalcote II thermal grease manufactured by Thermalloy, Inc. may be used.

Because the silver block is relatively flexible and soft it cannot transmit lateral clamping pressure very effectively. However, because the thermal interface media is thermal grease, the clamping force required is low.

Figure 4 shows an exploded view of the assembly with the preferred embodiment of the clamping mechanism. Each clamp 46 is made up of a series of fingers 48 extending from a spine 49. The fingers 48 are sized, shaped and spaced so as to fit between the wells 20 of the sample block 36 and thus apply pressure at a corresponding series of points on the base plate 22 of the sample block 36. The open honeycomb structure of the electroformed sample wells allows the fingers to be inserted some distance into the block, thereby applying the pressure more evenly than an edge clamping scheme would. These fingers apply pressure at a series of local points to minimize the contact area between the mass of the clamp and the sample block so that the clamp does not add significantly to the thermal load. The clamps are molded from a glass filled plastic which has the necessary rigidity for this application. The pressure is applied by deforming the fingers with respect to mounting posts 50 which may be separate clamp structures, but are preferably integrally formed with the clamps 46. The clamps 46 are held flush to the surface of the heat sink with a series of screws 52 extending through corresponding hole 53 in clamps 46 and then into threaded holes 55 in heatsink 34. This scheme eliminates the necessity to set the pressure with adjustment screws as the clamps can simply be tightened down by standard torqueing techniques.

The resulting even pressure distribution ensures that the full area of the thermal electric devices is in good thermal contact with the block and the heatsink reducing local thermal stresses on the thermal electric devices.

Figure 4 shows other important features of the invention. A printed circuit board 82 a memory device 96 for storing data and surrounds the thermal electric devices and provides electrical connections. Alignment pins 84 are seated in holes 86 in the heatsink and protrudes through alignment holes 88 to align the printed circuit board with the heatsink. The locating frame 41 is positioned around the thermal electric devices and has

a cross beam 90 with a through hold 92. Pin 24 (shown in Figure 1) fits into a hole (not shown) in the sample block, extends through hold 92 in the locating frame and further extends into hole 94 in the heatsink.

Perimeter Heater

In order to bring the temperature uniformity across the sample block to approximately $\pm 0.2^{\circ}\text{C}$, a perimeter heater is positioned around the sample block to eliminate heat losses from its edges. Preferably, the heater is a film type, having low mass with inside dimensions slightly larger than the sample block. Figure 10 shows the perimeter heater 74 and its approximate location surrounding the sample block 36. The heater is not fastened in place, it is simply positioned in the air around the perimeter of the sample block in order to warm the air in the immediate vicinity.

Figure 11 shows a detailed view of the perimeter heater 74. The heater is rectangular as determined by the dimensions of the sample block and is manufactured so that it has separate power densities in specific areas to reflect the varying amounts of heat loss around the perimeter of the block. Matching lower power density regions 76 (0.73 W/in^2) are located in the center portions of the short sides of the rectangle and matching higher power density regions 78 (1.3 W/in^2) are located in the longer sides, extending into the shorter sides.

As shown in Figure 12, the power applied to the perimeter heater is regulated to correspond to the temperature of the sample block, with more power applied to the heater at higher block temperatures and less applied at lower block temperatures.

Heated Cover:

Figure 5 shows the heated cover 57. The heated cover applies pressure to the sample vial caps to ensure that they remain tightly closed when the sample is heated.

Further, pressure transferred to the vials assures good thermal contact with the sample block. The cover is heated under computer control to a temperature above that of the sample to ensure that the liquid does not condense onto the tube cap and instead remains in the bottom of the tube where thermal cycling occurs. This is described in

United States Patent No. 5,475,610, mentioned above. The heated platen 54 in the present invention does not press on the dome of the cap but instead presses on the cap perimeter. The platen has a surface shaped in this manner so that optical caps are not distorted by the application of pressure. Thus, tubes that have been cycled can be directly transferred to an optical reader without the need to change the cap.

Because the heated platen has recesses 56 in it to clear the cap domes, there is a need to align the plate to the tube positions before applying pressure to avoid damage to the tubes. This is accomplished by use of a "skirt" 58 around the perimeter of the platen which aligns to the microtiter tray before the plate touches the tube caps. The cover has a sliding mechanism similar to that used on the PYRIS Differential Scanning Calorimeter by the Perkin Elmer Corporation allowing the cover to slide back to allow sample vials to be inserted into the sample block and forward to cover the sample block and move down engage the vials.

Determining the Ideal Ramp Rate:

The optimized ramp rate has been empirically determined to be 4°C/sec. Any system which has a higher block ramp rate than this cannot fully utilize the benefits temperature of overshoots and consequently achieves an insignificant reduction in cycle time.

Figure 6 is a chart depicting the Up Ramp (heating rate) vs. Power and Figure 7 is a chart depicting the Down Ramp (cooling rate) vs. Power.

When heating the block to a temperature above ambient, the Joule heating and the Seebeck heat pumping both act to heat the sample block against conduction. When cooling the block between two temperatures above ambient, the Seebeck heat pumping and conduction act against the Joule heating. During cooling, significant power is required to hold the block temperature steady against the flow of heat out of the block by conduction. Therefore even with zero power applied, the block will cool at a significant rate. As the current is increased, the Seebeck effect increases the cooling obtained. However as the current is increased further the joule effect, which is proportional to the square of the current, quickly starts to take over acting against the Seebeck cooling.

Therefore a point is reached where applying additional power acts against the required effect of cooling. In the heating mode these two effects act together against conduction and no ceiling is reached. In practice the heating power vs. input current is approximately linear. This is why the design criteria centers around meeting the cooling rate requirements; the heating rate can always be achieved by the application of more power.

Characterizing the Output of the TED's

The following equation describes the total heat flow from the cold side of a thermal electric cooler.

$$0 = 1/2 * R(t_{avg}) * I^2 + t_c * S(t_{avg}) * I - (k(t_{avg}) * (t_c - t_h) + Q_c)$$

where

t_c = cold side temperature of cooler

t_h = hot side temperature of cooler

t_{avg} = average of t_c and t_h

$R(t)$ = electrical resistance of cooler as a function of temperature

$S(t)$ = Seebeck coefficient of the cooler as a function of temperature

$K(t)$ = Conductance of cooler as function of temperature

I = electrical current applied to cooler

Q_c = total heat flow from the cold side of the cooler

Given a desired heat flow, Q_c , and the hot and cold side temperatures, t_c and t_h , the equation is solved for I , the current required to produce Q_c . The solution of this equation is used for three purposes:

1) To achieve linear temperature transitions or ramps.

For linear temperature transitions, constant thermal power is required. To maintain constant thermal power when temperatures t_c and t_h are changing, it is necessary to solve for I in equation 1 periodically. The result is the current then applied to the

coolers. To compensate for errors a proportional integral derivative (PID) control loop is applied where:

Error input to PID = Set point Rate - Actual Rate

and Output from the PID is interpreted as percent Q

2) To achieve a linear PID temperature set point control algorithm over the desired temperature range:

Input to the PID control is the error signal t_c - Set point.

Output from the PID control is interpreted as a % of Q_{\max} .

Equation 1 is used to determine the current value, I , which will result in the % of Q_{\max} output by the PID control, under the current temperature conditions.

3) To achieve non-linear temperature transitions or ramps where temperature transitions are defined by the derivative of temperature with respect to time, dT/dt , as a function of block temperature.

This function is approximated by a table containing Block temperature T , dT/dt data points in 5 C increments for cooling and by a linear equation for heating. The small effect of sample mass on dT/dt profiles, although measurable, is ignored. Knowing the total thermal mass, MC_p (joules/ $^{\circ}K$), involved during temperature transitions, the amount of thermal power, Q (joules/sec), required to achieve the desired rate profile, dT/dt ($^{\circ}K/sec$), is given at any temperature by the following equation:

$$Q = MC_p * dT/dt$$

The solution to equation 1 is used to determine the current value, I , which will result in the desired Q under the current temperature conditions. This process is repeated periodically during temperature transitions.

Controlling overshoot and undershoot

There is a practical limit to the ramp rates and the resulting cycle times that can be achieved. The sample has a time constant with respect to the block temperature that is a function of the sample tube and tube geometry which, because the tube is an industry

standard, cannot be reduced. This means that even if the sample tube wall temperature is changed as a step function e.g. by immersion in a water bath, the sample will have a finite ramp time as the sample temperature exponentially approaches the set point. This can be compensated for by dynamically causing the block to overshoot the programmed temperature in a controlled manner. This means that the block temperature is driven beyond the set point and back again as a means of minimizing the time taken for the sample to reach the set point. As the possible ramp-rates increase, the overshoot required to minimize the time for the sample to reach the set point gets larger and a practical limit is soon reached. This occurs because although the average sample temperature does not overshoot the set point, the boundary liquid layer in the tube does overshoot to some extent. When cooling to the priming temperature, too great an overshoot can result in non-specific priming. Therefore the best advantage is to be gained in a system which utilizes this maximum ramp rate combined with optimized overshoots that are symmetrical on both up and down ramps.

Figure 8 is a chart for predicting and compensating for temperature overshoots and undershoots. In order to drive the block temperature beyond the set point and back again in a controlled fashion the system first measures the block temperature, $T_{b_{n+1}}$ and then solves the following equations:

$$Ts_{n+1} = Ts_n + (T_{b_{n+1}} - Ts_n) * 0.174 / RC$$

$$Tsf_n = (T_{b_n} - Ts_n - mRC)(1 - e^{-tm/RC}) + mtr_n + Ts_n$$

where T_b is the measured block temperature, T_s is the calculated sample temperature, Tsf is the final calculated sample temperature if the block is ramped down at time t_n , R is the thermal resistance between the sample block and the sample, C is the thermal capacitance of the sample, m is the slope of a line defined by the points T_b and Tsf and tr is the time for the sample block to return to the set point if the system caused it to ramp toward the set point at the same rate it is was ramping away.

If the resulting Tsf_n is within a particular error window around the set point then the system causes the sample block to ramp back to the set point at the same rate it was

ramping away. If the resulting Tsf_n is outside the particular error window then the system causes the sample block to continue to ramp away from the set point at the same rate. While ramping back toward the set point the same proportional integral derivative (PID) control loop described above is applied.

Determining Sample Temperature

The temperature of a sample in a sample vial is determined by using the model illustrated in Figure 13 where:

TBlk is the measured baseplate temperature;

TSmp is the calculated sample temperature;

TPlastic is the calculated plastic temperature;

TCvr is the measured cover temperature;

R1 is the thermal resistance of the plastic vial between the block and sample mixture;

C1 is the thermal capacitance of the sample mixture;

R2 and R3 represent the thermal resistance of air in parallel with the plastic vial between the sample mixture and the cover; and

C2 is the thermal capacitance of the plastic vial between the sample mixture and the cover.

The model above is solved for TSmp(t) and TPlastic(t) given that: TBlk = mt + TBlk0, TCvr = K and initial conditions are non-zero. Taking initial conditions and the slope of TBlk to be the only variables, as illustrated in Figure 14, the equations are refactored giving equations for TSmp and TPlastic.

Given the following relationships:

$$g1 = 1/R1;$$

$$g2 = 1/R2;$$

$$g3 = 1/R3;$$

$$a = (g1 + g2)/C1;$$

$$b = g2 / C1;$$

$$f = g2 / C2;$$

$$g = (g_2 + g_3) / C_2;$$

$$\alpha = -(-g/2 - a/2 - (\sqrt{g^2 - 2ga + a^2 + 4fb})/2); \text{ and}$$

$$\beta = -(-g/2 - a/2 + (\sqrt{g^2 - 2ga + a^2 + 4fb})/2),$$

the coefficients for the sample temperature equation become:

$$\text{coef1} = (g_3/C_2) * (-b/(\beta * (\alpha - \beta)) * \exp(-\beta * T) + b/(\alpha * \beta) + (b/(\alpha * (\alpha - \beta))) * \exp(-\alpha * T))$$

$$\text{coef2} = (b/(\alpha - \beta)) * \exp(-\beta * T) - (b/(\alpha - \beta)) * \exp(-\alpha * T)$$

$$\text{coef3} = (g_1/C_1) * (g/(\alpha * \beta) + (-\alpha + g) * \exp(-\alpha * T)/(\alpha * (\alpha - \beta)) + (\beta - g) * \exp(-\beta * T)/(\beta * (\alpha - \beta)))$$

$$\text{coef4} = (g_1/C_1) * ((g - \beta) * \exp(-\beta * T)/(\beta^2 * (\alpha - \beta)) - g/(\beta * \alpha^2) + (1 + T * g)/(\alpha * \beta) + (-g + \alpha) * \exp(-\alpha * T)/(\alpha^2 * (\alpha - \beta)) - g/(\alpha * \beta^2))$$

$$\text{coef5} = (-g + \alpha) * \exp(-\alpha * T)/(\alpha - \beta) + (g - \beta) * \exp(-\beta * T)/(\alpha - \beta)$$

and the coefficients for the plastic vial temperature equation become:

$$\text{coef6} = (g_3/C_2) * ((\beta - a) * \exp(-\beta * T)/(\beta * (\alpha - \beta)) + a/(\alpha * \beta) + (-\alpha + a) * \exp(-\alpha * T)/(\alpha * (\alpha - \beta)))$$

$$\text{coef7} = (-\beta + a) * \exp(-\beta * T)/(\alpha - \beta) + (\alpha - a) * \exp(-\alpha * T)/(\alpha - \beta)$$

$$\text{coef8} = (g_1/C_1) * (f * \exp(-\beta * T)/(\beta^2 * (\alpha - \beta)) - f/(\beta * \alpha^2) - f * \exp(-\alpha * T)/(\alpha^2 * (\alpha - \beta)) + T * f/(\alpha * \beta) - f/(\alpha * \beta^2))$$

$$\text{coef9} = (g_1/C_1) * (-f * \exp(-\beta * T)/(\beta * (\alpha - \beta)) + f/(\alpha * \beta) + f * \exp(-\alpha * T)/(\alpha * (\alpha - \beta)))$$

$$\text{coef10} = f * \exp(-\beta * T)/(\alpha - \beta) - f * \exp(-\alpha * T)/(\alpha - \beta)$$

and

$$\text{slope} = (T_{Blk} - T_{Blk0})/T \text{ where } T \text{ is the sampling period (0.174sec)}$$

Utilizing the model in Figure 13 then,

$$T_{Smp} = \text{coef1} * T_{Cvr0} + \text{coef2} * T_{Plastic0} + \text{coef3} * T_{Blk0} + \text{coef4} * \text{slope} + \text{coef5} * T_{Smp0}$$

$$T_{\text{Plastic}} = \text{coef6} * T_{\text{Cvr0}} + \text{coef7} * T_{\text{Plastic0}} + \text{coef8} * \text{slope} + \text{coef9} * T_{\text{Blk0}} + \text{coef10} * T_{\text{Smp0}}$$

The coefficients are recalculated at the beginning of each PCR protocol to account for the currently selected sample volume. TSmp and TPlastic are recalculated for every iteration of the control task.

To determine the sample block set point, TBlkSP, during a constant temperature cycle, Tblk is determined using the equation for TSmp.

$$T_{\text{blk0}} = (T_{\text{smp}} - \text{coef1} * T_{\text{Cvr0}} - \text{coef2} * T_{\text{Plastic0}} - \text{coef4} * \text{slope} - \text{coef5} * T_{\text{Smp0}}) / \text{coef3}$$

When maintaining a constant temperature the slope = 0 and $T_{\text{smp}} = T_{\text{smp0}} = T_{\text{SmpSP}}$ (sample temperature set point) and:

$$T_{\text{BlkSP}} = (T_{\text{SmpSP}} - \text{coef1} * T_{\text{Cvr}} - \text{coef2} * T_{\text{Plastic}} - \text{coef5} * T_{\text{SmpSP}}) / \text{coef3}$$

The equation for TBlkSP is solved on every pass of the control loop to update the sample block set point to account for changes in temperature of the plastic and cover.

Calibration Diagnostics:

The control software includes calibration diagnostics which permit variation in the performance of thermoelectric coolers from instrument to instrument to be compensated for so that all instruments perform identically. The sample block, thermal electric devices and heatsink are assembled together and clamped using the clamping mechanism described above. The assembly is then ramped through a series of known temperature profiles during which its actual performance is compared to the specified performance. Adjustments are made to the power supplied to the thermal electric devices and the process is repeated until actual performance matches the specification. The thermal characteristics obtained during this characterization process are then stored in a

memory device residing on the assembly. This allows the block assembly to be moved from instrument to instrument and still perform within specifications.

AC Resistance Measurement:

The typical failure mode for the thermal electric devices is an increase in resistance caused by a fatigue failure in a solder joint. This results in an increase in the temperature of that joint which stresses the joint further, rapidly leading to catastrophic failure. It has been determined empirically that devices that exhibit an increase in AC resistance of approximately 5% after about 20,000 to 50,000 temperature cycles will shortly fail. The AC resistance of the thermal electric devices are monitored by the instrument to detect imminent failures before the device in question causes a thermal uniformity problem.

This embodiment automates the actual measurement using a feedback control system and eliminates the need to remove the thermal electric device from the unit. The control system compensates for the temperature difference between the two surfaces of the thermal electric device caused by the heat sink attached to one side and the sample block attached to the other. The control system causes the thermal electric device to equalize its two surface temperatures and then the AC resistance measurement is made. The micro-controller performs a polynomial calculation at the referenced time of the AC measurement to compensate for ambient temperature error.

Figure 9 shows the sample block 36, a layer of thermal electric device 60 and heatsink 34 interfaced with the system microcontroller 62 and bipolar power amplifier 64. The temperature sensor already present in the heatsink 38 and an additional temperature sensor attached to the sample block 36 with a clip (not shown) formed of music wire are utilized to determine the temperature differential of the surfaces of the thermal electric device.

The bipolar power amplifier supplies current in two directions to the device. Current in one direction heats the sample block and current in the other direction cools the sample block. The bipolar power amplifier also has signal conditioning capability to measure the AC voltage and AC current supplied to the thermal electric device. A band

pass filter 68 is incorporated into the signal conditioning to separate an AC measurement signal from the steady state signal that produces a null condition for the temperature difference across the thermal electric device.

The micro-controller incorporates the necessary capability to process the measurement information and perform the feedback in real time. It also stores the time history of the AC resistance and the number of temperature cycles of the thermal electric device and displays the information to the operator on the display 70. The AC measurement is normally done during initial turn on. However, it can be activated when self diagnostics are invoked by the operator using the keypad 72. An analog to digital and digital to analog converter along with signal conditioning for the temperature sensors and AC resistance measurement is also integrated into the micro-controller in order for it to perform its digital signal processing.

Sealing the Thermal Electric Device Area from the Environment.

The thermal electric devices are protected from moisture in the environment by seals and the chamber is kept dry with the use of a drying agent such as silica gel. The seal connects from the silver electroform to the surrounding support and as such adds to the edge losses from the block. These losses are minimized by the use of a low thermal conductivity pressure seal 98 and by the use of the perimeter heater described above. The seal 98 has a cross-section generally in the shape of a parallelogram with several tabs 100 spaced about the lower surface of seal 98 for holding seal 98 to the edge of the sample block as shown in Figure 15.

The seal 98 is installed by first applying RTV rubber (not shown) around the perimeter 110 of the upper portion of the sample block. The seal 98 is then placed on the RTV rubber. More RTV rubber is applied to the perimeter 120 of the seal and then a cover (not shown) is installed which contacts the RTV rubber - seal combination. The cover has a skirt which also contacts a gasket (not shown) on the printed circuit board to effect a more effective seal.

CLAIMS

1. An apparatus for performing the polymerase chain reaction in a plurality of liquid reaction mixtures; said apparatus including a plurality of vials containing such liquid reaction mixtures, said vials having an upper portion and a lower portion; said apparatus comprising:
 - an assembly for cycling said vials through a series of temperature excursions;
 - a cover for applying a seating force directly to said vials and for applying a constant temperature to the upper portion of said vials; and
 - a computing apparatus for controlling said temperature excursions of said assembly and said constant temperature of said cover.
2. The apparatus of claim 1 wherein said assembly comprises:
 - a sample block for receiving said vials;
 - a plurality of thermal electric devices;
 - a heat sink;
 - a clamping mechanism positioned so as to clamp said Peltier thermal electric devices between said sample block and said heatsink;
 - a heater positioned loosely around the perimeter of said sample block; and
 - a pin having a first end and a second end, said first end in close contact with said sample block and said second end in close contact with said heatsink so as to provide a thermal path between said sample block and said heatsink.
3. The apparatus of claim 2 wherein said sample block comprises:
 - a plurality of sample wells, for receiving sample vials, each well having a top and bottom;
 - an upper support plate connecting the tops of said sample wells.
4. The apparatus of claim 3 wherein said upper support plate and said sample wells are electroformed as a single piece.

5. The apparatus of claim 3 wherein said sample block is comprised of silver.
6. The apparatus of claim 3 wherein said sample wells are arranged in an 8 x 12 array.
7. The apparatus of claim 3 wherein sample block is rectangular.
8. The apparatus of claim 2 wherein said plurality of Peltier thermoelectric devices are matched to provide a temperature within 0.2 C for a given input current.
9. The apparatus of claim 2 wherein said Peltier thermoelectric devices comprise:
 - a first ceramic layer having bonded copper traces;
 - a second ceramic layer having bonded copper traces, said second ceramic layer comprising a plurality of ceramic elements; and
 - a plurality of bismuth telluride pellets positioned between said first ceramic layer and said second ceramic layer and soldered to said bonded copper traces on said first and second ceramic layers.
10. The apparatus of claim 9 wherein the ceramic of said first and second layer is alumina.
11. The apparatus of claim 9 wherein the ceramic layers have a thickness of 0.508mm.
12. The apparatus of claim 9 wherein said bismuth telluride pellets are soldered using high temperature solder.
13. The apparatus of claim 9 wherein the resistivity of the devices is determined from the equation:

$$R = nr(h/A)$$

where R is the resistivity of the device, n is the number of pellets, r is the resistivity of the bismuth telluride being used, h is the height of the pellet and A is the cross sectional area of the bismuth telluride.

14. The apparatus of claim 2 wherein said heatsink comprises:
 - a plate having a top side and a bottom side;
 - a plurality of fins extending perpendicularly from said bottom side;
 - a trench extending around the perimeter of said top side to impede heat loss from said perimeter;
 - a fan placed in close proximity to said fins to control air flow through said fins;and
 - a recess within said plate for receiving a temperature sensor.
15. The assembly of claim 2 wherein said clamping mechanism comprises:
 - a spine and said spine having a plurality of openings in said spine for receiving fasteners;
 - a plurality of fingers extending laterally from said spine.
16. The apparatus mechanism of claim 15 wherein said spine is rectangular in shape.
17. The apparatus mechanism of claim 15 wherein said fingers are rectangular in shape.
18. The apparatus of claim 15 wherein said fingers have a top and a bottom and are tapered so as to have less width at said top than at said bottom.
19. The apparatus of claim 15 wherein said fingers have a first end protruding laterally from said spine and a protrusion extending downward from said first end.

20. The apparatus of claim 15 wherein said fingers have a beveled front edge.
21. The apparatus of claim 15 wherein each of said openings are located in close proximity to a corresponding finger.
22. The apparatus of claim 2 wherein said heater comprises an electrically resistive path embedded in a frame shaped film carrier.
23. The apparatus of claim 22 wherein said electrically resistive path comprises a first set of sections located on opposite sides of said frame shaped carrier having a first power density and a second set of sections located on opposite sides of said frame shaped having a second power density.
24. The apparatus of claim 2 further comprising an associated memory device capable of storing data related to said assembly.
25. The apparatus of Claim 1 wherein said cover comprises:
- a platen, vertically and horizontally displaceable in relationship to said vials, said platen including:
- an array of openings corresponding to locations of said vials, said openings having a perimeter corresponding to a perimeter of said vials;
 - a skirt extending downward around the perimeter of said platen, said skirt having dimensions corresponding to the perimeter of a standard microtiter tray, said skirt constructed to engage said perimeter of said tray during vertical displacement of said platen, causing said openings in said platen to engage said perimeter of said vials, applying a seating force on said vials for maintaining a snug fit between walls of said sample vials and said assembly for receiving said sample vials

means for forcibly lowering said platen to maintain said seating force; and

heating means positioned in close contact with said platen to maintain said platen at a constant temperature.

26. The apparatus of claim 1 wherein said assembly comprises of at least one device for changing the temperature of said apparatus further comprising a system for measuring the AC resistance of said thermal electric device.

27. The apparatus of claim 26 wherein at least one device has a first heating and cooling surface and a second heating and cooling surface, said system comprising:

- a first temperature sensor positioned so as to be in thermal communication with said first heating and cooling surface;

- a second temperature sensor positioned so as to be in thermal communication with said second heating and cooling surface;

- a bi-polar amplifier circuit for providing power to said thermal electric device;

- a circuit for sensing AC voltage across said thermal electric device and producing a DC voltage representing said AC voltage;

- a circuit for sensing AC current through said thermal electric device and producing a DC voltage representing said AC current;

- a microcontroller programmed to receive said signals from said first and second temperature sensors;

- said microcontroller further programmed to cause said bi-polar amplifier to provide power to said thermal electric device so that said first and second temperature sensor signals indicate equal temperatures;

- said microcontroller further programmed to cause an AC voltage to be superimposed on said bi-polar amplifier power;

- said microcontroller further programmed to receive said voltages produced by said circuit for sensing AC voltage and from said circuit for sensing AC current;

said microcontroller further programmed to calculate the AC resistance of said thermal electric device from said voltages;

said microcontroller further programmed to compensate for ambient temperature error by performing a polynomial calculation; and

said microcontroller further programmed to store said compensated AC resistance measurement.

28. A method for measuring the AC resistance of a thermal electric device having a first heating and cooling surface and a second heating and cooling surface, said method comprising:

measuring the temperature of said first heating and cooling surface;

measuring the temperature of said second heating and cooling surface;

applying power to said Peltier thermal electric device to cause said first heating and cooling surface and said second heating and cooling surface to attain the same temperature;

applying an AC voltage across said thermal electric device;

measuring said AC voltage across said thermal electric device;

measuring AC current through said thermal electric device;

calculating the AC resistance of said thermal electric device from said measured AC voltage and said measured AC current.

29. The method of claim 28, further comprising:

performing a calculation for compensating for ambient temperature error to calculate a compensation AC resistance measurement; and

storing said compensated AC resistance measurement.

30. A method for achieving linear temperature transitions utilizing a thermal electric device having at least a first heating and cooling surface and a second heating and cooling surface and being operated in a manner causing said first surface to be higher in

temperature and said second surface to be lower in temperature relative to each other, said method comprising the following steps:

- determining a desired heat flow from said lower temperature surface;
- determining electrical resistance of said thermal electric device as a function of temperature;
- determining the Seebeck coefficient of said thermal electric device as a function of temperature;
- determining the conduction of said thermal electric device as a function of temperature;
- measuring the temperature of said lower temperature surface;
- measuring the temperature of said higher temperature surface;
- calculating the average temperature of said lower temperature surface and said higher temperature surface; and
- calculating the current required to achieve said desired heat flow as a function of said electrical resistance of said thermal electric device as a function of temperature, said Seebeck coefficient of said thermal electric device as a function of temperature, said conductance of said thermal electric device as a function of temperature, said temperature of said lower temperature surface, said temperature of said higher temperature surface, and said average of said lower temperature surface and said higher temperature surface.

31. A method for determining the temperature of a mixture in a sample vial, said vial having an upper portion and a lower portion an contained in an apparatus comprising:
- as assembly for cycling said vials through a series of temperature excursions, said assembly further comprising a sample block for receiving said vials;
 - a cover for applying a seating force on said vials and for applying a constant temperature to the upper portion of said vials; and
 - a computing apparatus for controlling said temperature excursions of said assembly and said constant temperature of said cover.

said method comprising:

- measuring the temperature of said sample block;
- measuring the temperature applied by said cover;
- determining the thermal resistance of said vial between said sample block and said mixture;
- determining the thermal resistance of air in parallel with said vial between said mixture and said cover;
- determining the thermal capacitance of said mixture;
- determining the thermal capacitance of said vial between said mixture and said cover; and
- calculating the temperature of said mixture as a function of said temperature of said sample block, said temperature applied by said cover, said thermal resistance of said vial between said sample block and said mixture, said thermal resistance of air in parallel with said vial between said mixture and said cover, said thermal capacitance of said mixture and said thermal capacitance of said vial between said mixture and said cover.

32. A method of calibrating an assembly for cycling samples through a series of temperature excursions comprising a sample block for receiving vials, a plurality of thermal electric devices, a heat sink, a clamping mechanism positioned so as to clamp said Peltier thermal electric devices between said sample block and said heatsink, and a memory device capable of storing data related to said assembly, said method comprising:

- applying power to said thermal electric devices, causing said assembly to cycle through a desired series of temperature excursions

- measuring the actual temperature excursions

- comparing said actual temperature excursions with said desired temperature excursions

- adjusting said power applied to said thermal electric devices so that said actual temperature excursions match said desired temperature excursions

- recording said adjusted power in said memory device for further utilization in obtaining said desired series of temperature excursions

33. An assembly for cycling vials of reaction mixtures through a series of temperature excursions comprising:

- a sample block for receiving vials of reaction mixtures;
- a plurality of thermal electric devices;
- a heat sink;
- a clamping mechanism positioned so as to clamp said thermal electric devices between said sample block and said heatsink;
- a heater positioned around the perimeter of said sample block; and
- a pin having a first end and a second end, said first end in close contact with said sample block and said second end in close contact with said heatsink so as to provide a thermal path between said sample block and said heatsink;
- a computing apparatus for controlling said temperature excursions of said assembly and said heater.

34. A sample block for holding sample vials comprising:

- a plurality of sample wells, for receiving sample vials, each well having a top and bottom;
- an upper support plate connecting the tops of said sample wells; and
- a bottom plate connecting the bottom of said sample wells

35. The sample block of claim 34 wherein said upper support plate and said sample wells are electroformed as a single piece.

36. The sample block of claim 34 wherein said sample block is comprised of silver.

37. The sample block of claim 34 wherein said sample wells are arranged in an 8 x 12 array.

38. The sample block of claim 34 wherein sample block is rectangular.

39. A heatsink assembly comprising:
- a plate having a top side and a bottom side;
 - a plurality of fins extending perpendicularly from said bottom side;
 - a trench extending around the perimeter of said top side to impede heat loss from said perimeter;
 - a fan placed in close proximity to said fins to control air flow through said fins;
- and
- a recess within said plate for receiving a temperature sensor.
40. An apparatus for measuring the AC resistance of a Peltier thermal electric device having a first heating and cooling surface and a second heating and cooling surface, said system comprising:
- a first temperature sensor positioned so as to be in thermal communication with said first heating and cooling surface;
 - a second temperature sensor positioned so as to be in thermal communication with said second heating and cooling surface;
 - a bi-polar amplifier circuit for providing power to said thermal electric device;
 - a circuit for sensing AC voltage across said thermal electric device and producing a DC voltage representing said AC voltage;
 - a circuit for sensing AC current through said thermal electric device and producing a DC voltage representing said AC current;
 - a microcontroller programmed to receive said signals from said first and second temperature sensors;
 - said microcontroller further programmed to cause said bi-polar amplifier to provide power to said thermal electric device so that said first and second temperature sensor signals are equal;
 - said microcontroller further programmed to cause an AC voltage to be superimposed on said bi-polar amplifier power;
 - said microcontroller further programmed to receive said voltages produced by said circuit for sensing AC voltage and from said circuit for sensing AC current;

said microcontroller further programmed to calculate the AC resistance of said thermal electric device from said voltages;

said microcontroller further programmed to compensate for ambient temperature error by performing a polynomial calculation; and

said microcontroller further programmed to store said compensated AC resistance measurement.

1/13

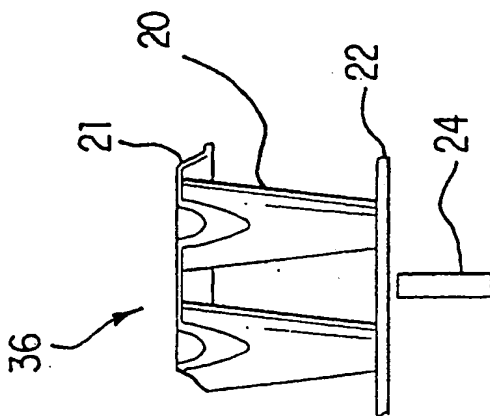


FIG. 1

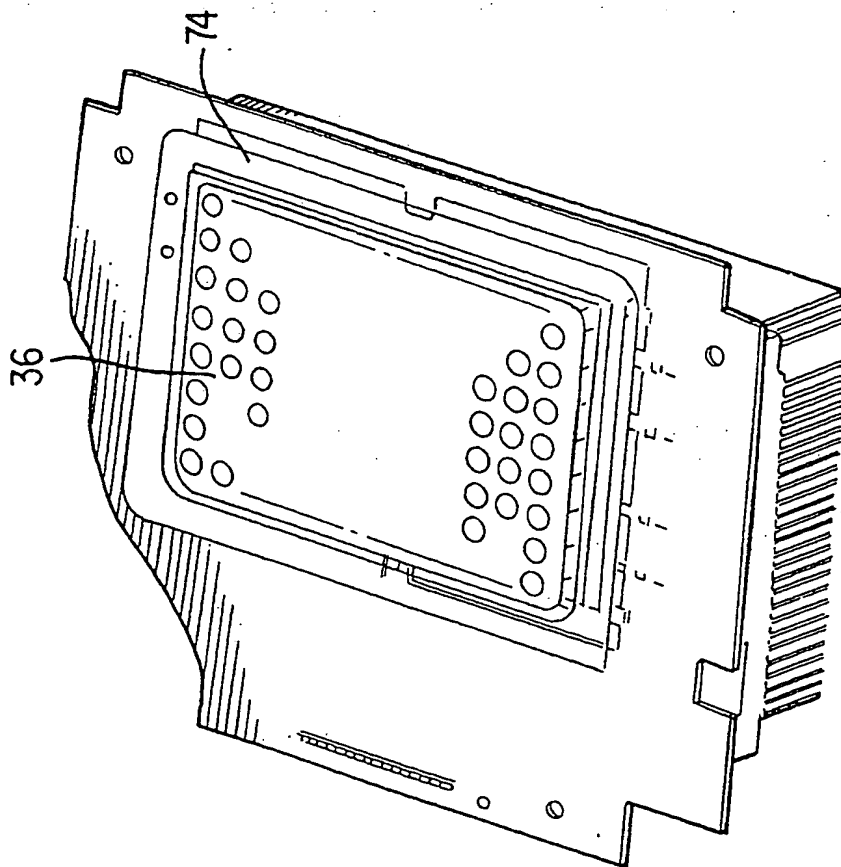


FIG. 10

2/13

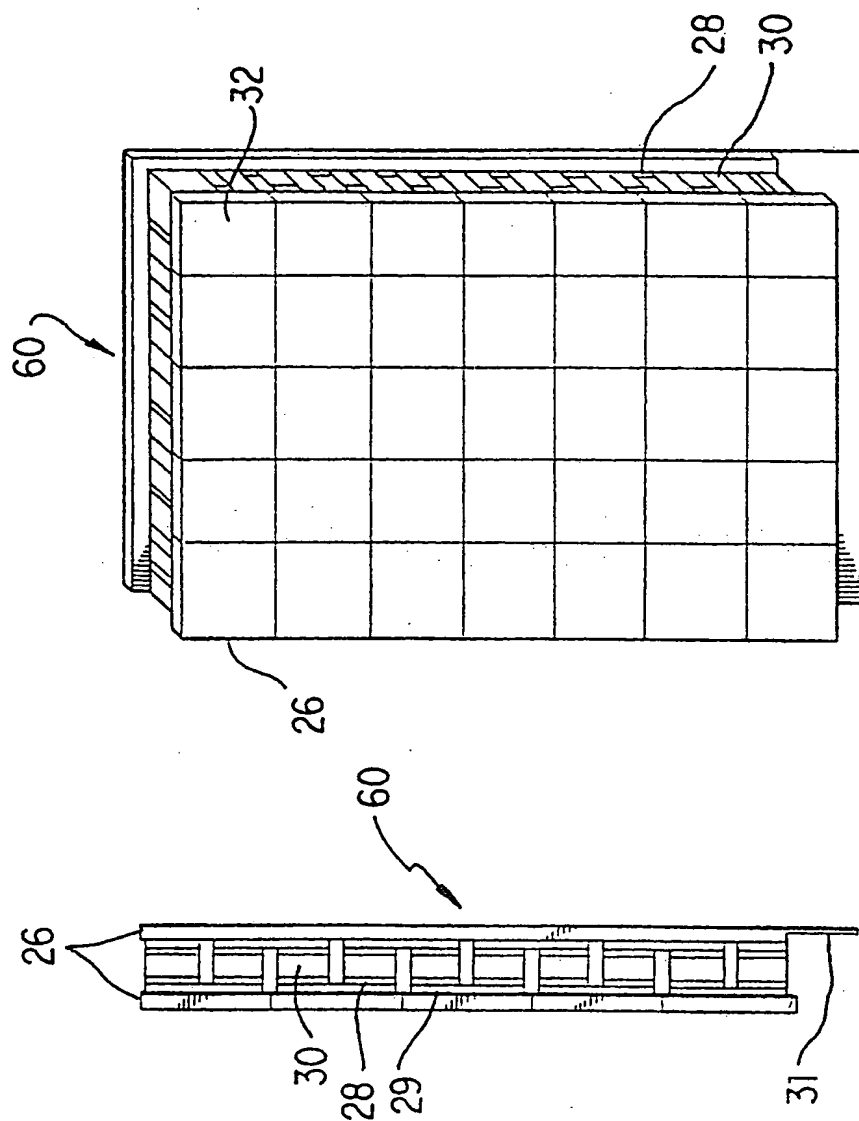


FIG. 2

FIG. 2A

3/13

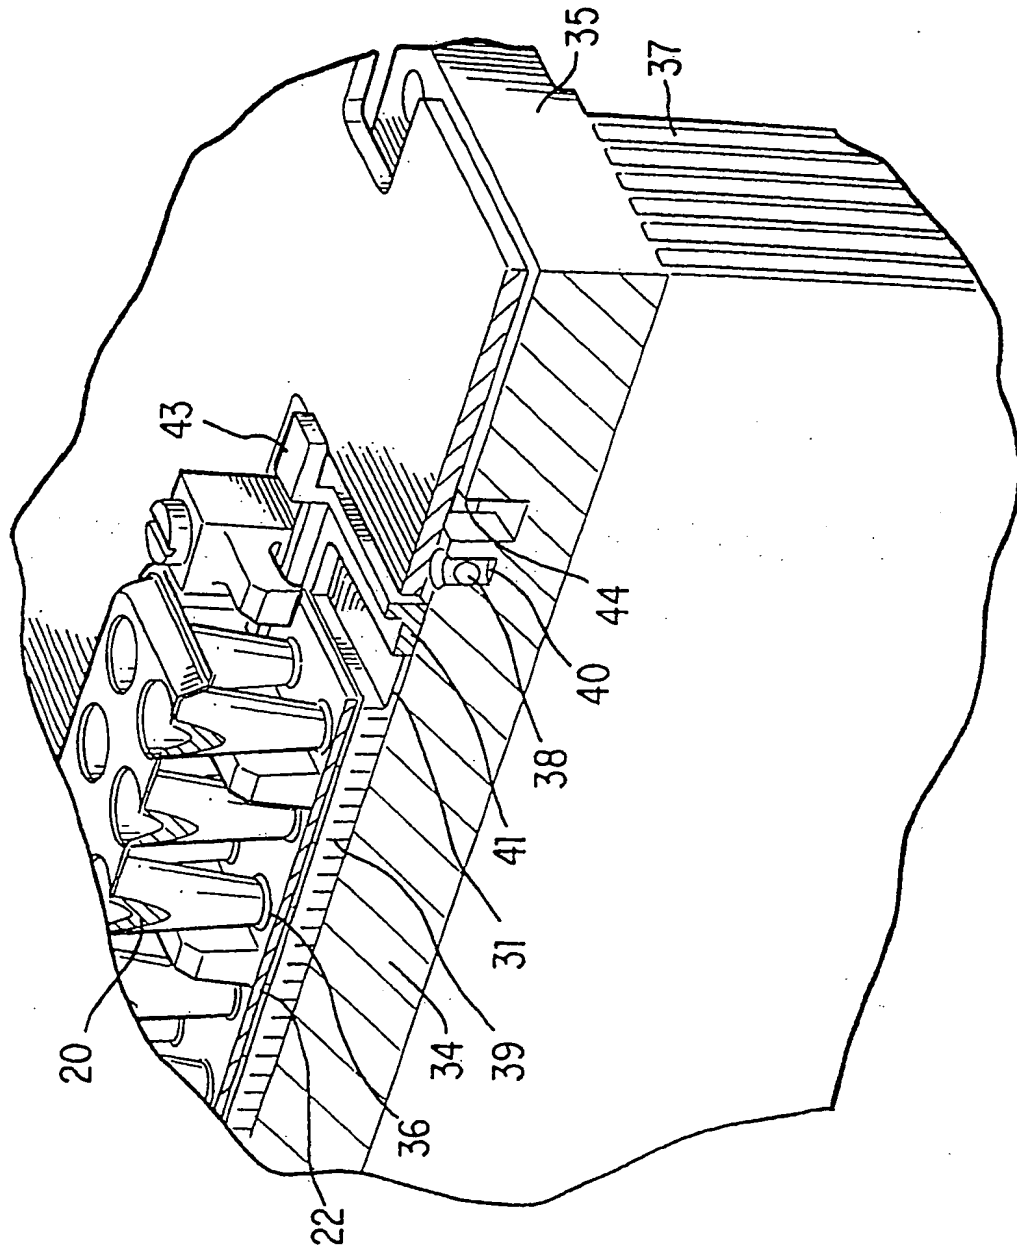


FIG. 3

4/13

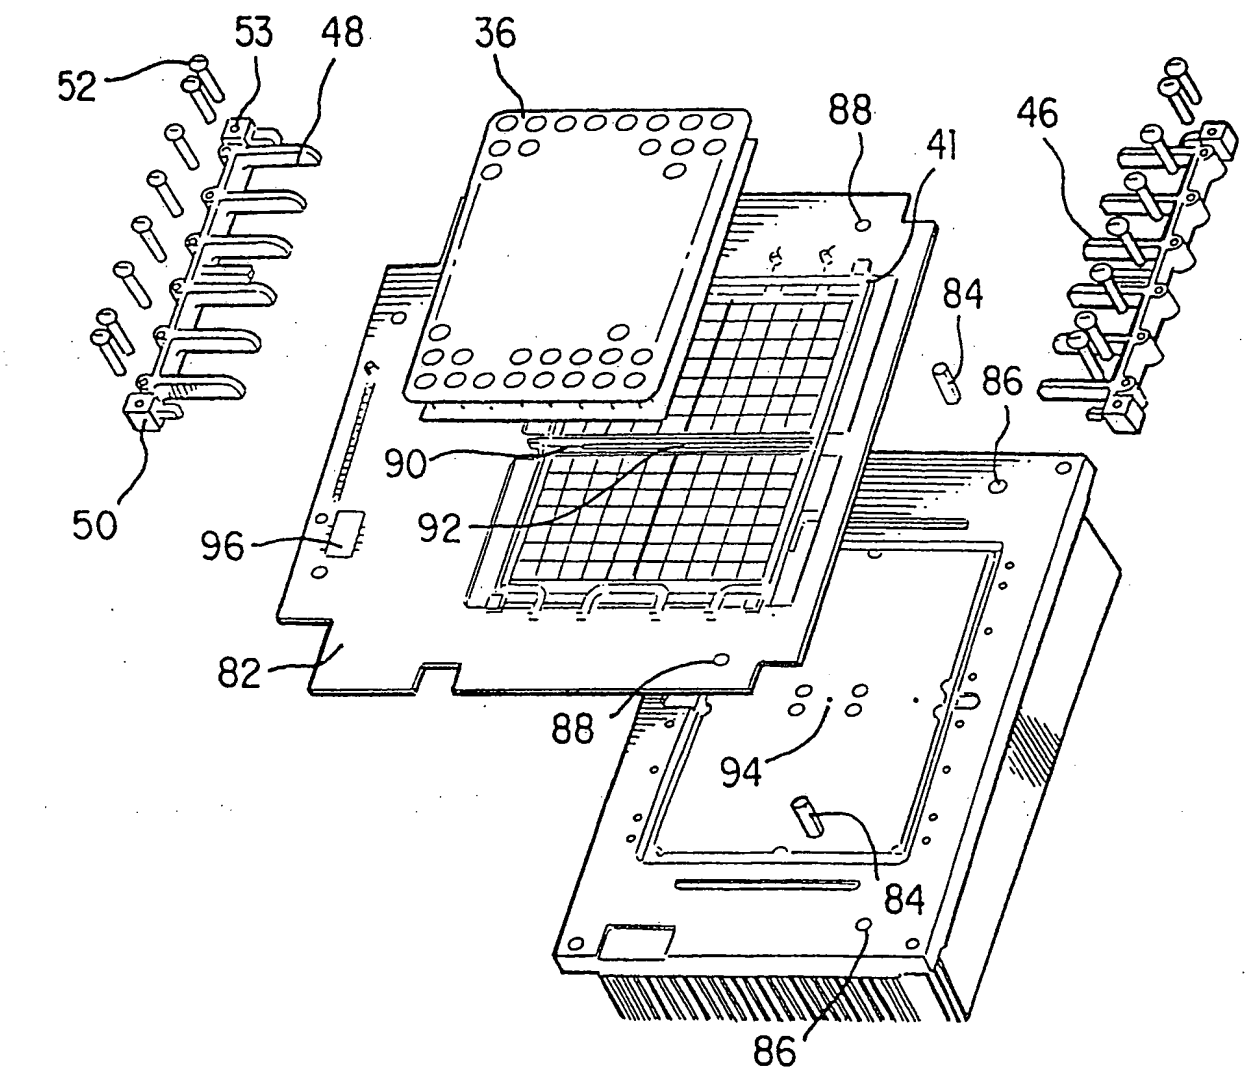


FIG. 4

5/13

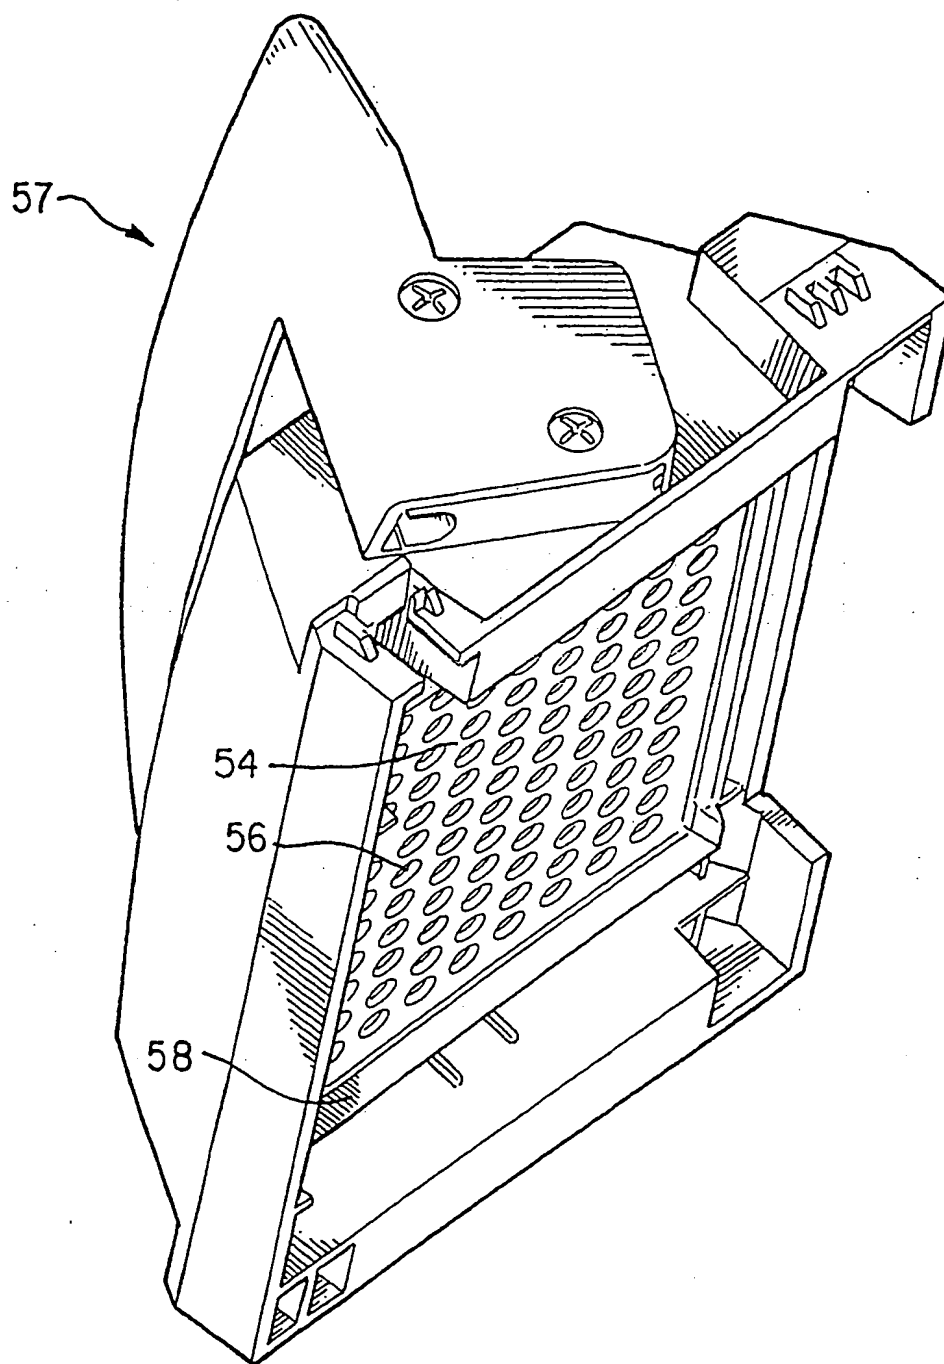


FIG. 5

6/13

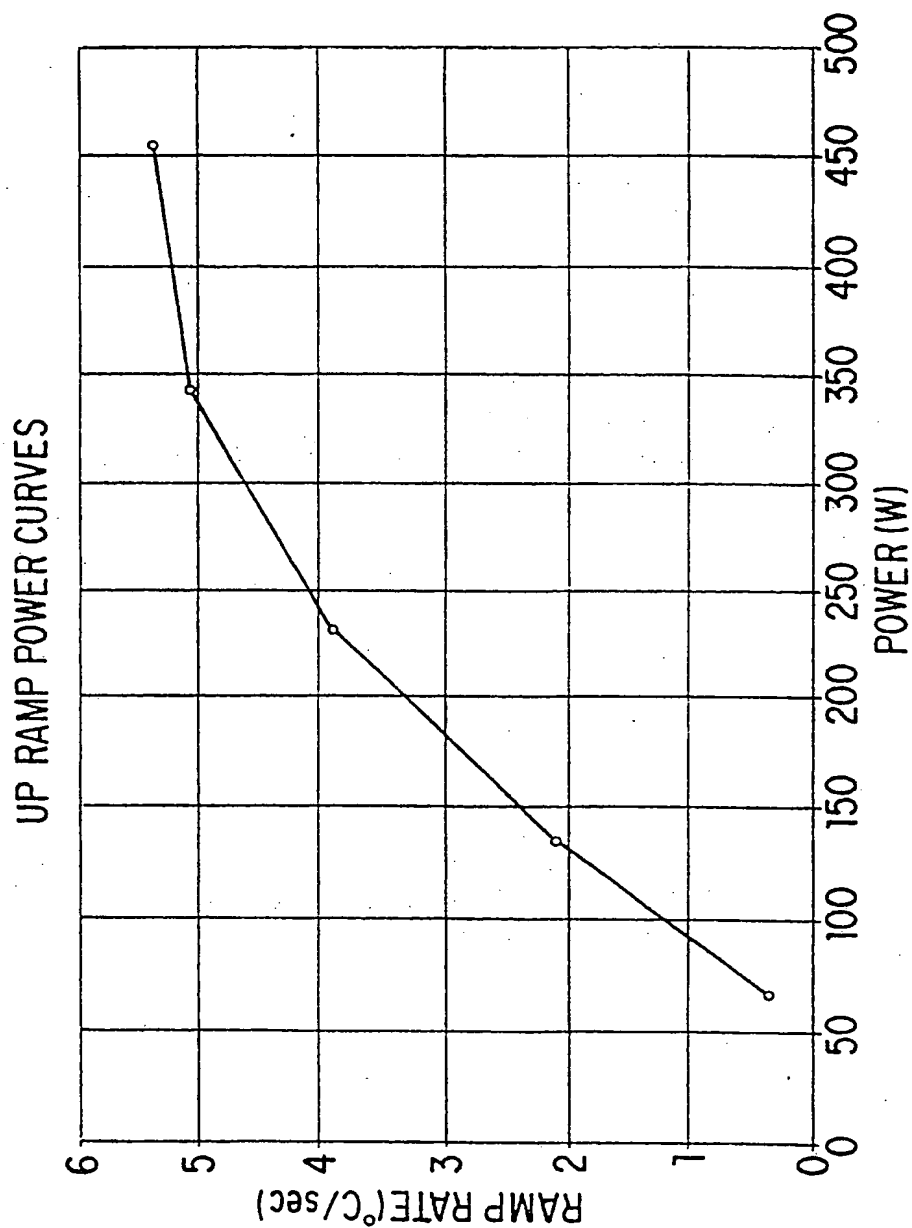


FIG. 6

7/13

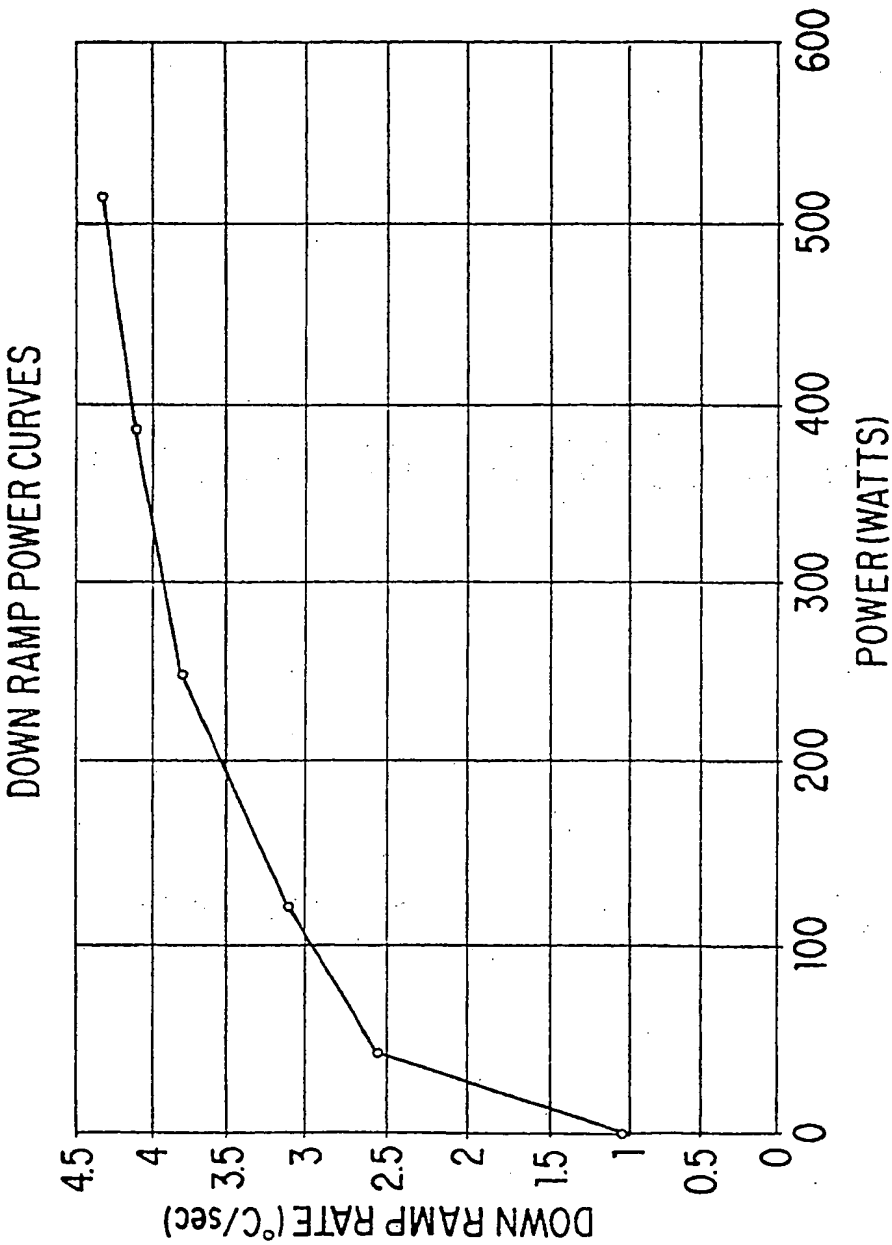


FIG. 7

8/13

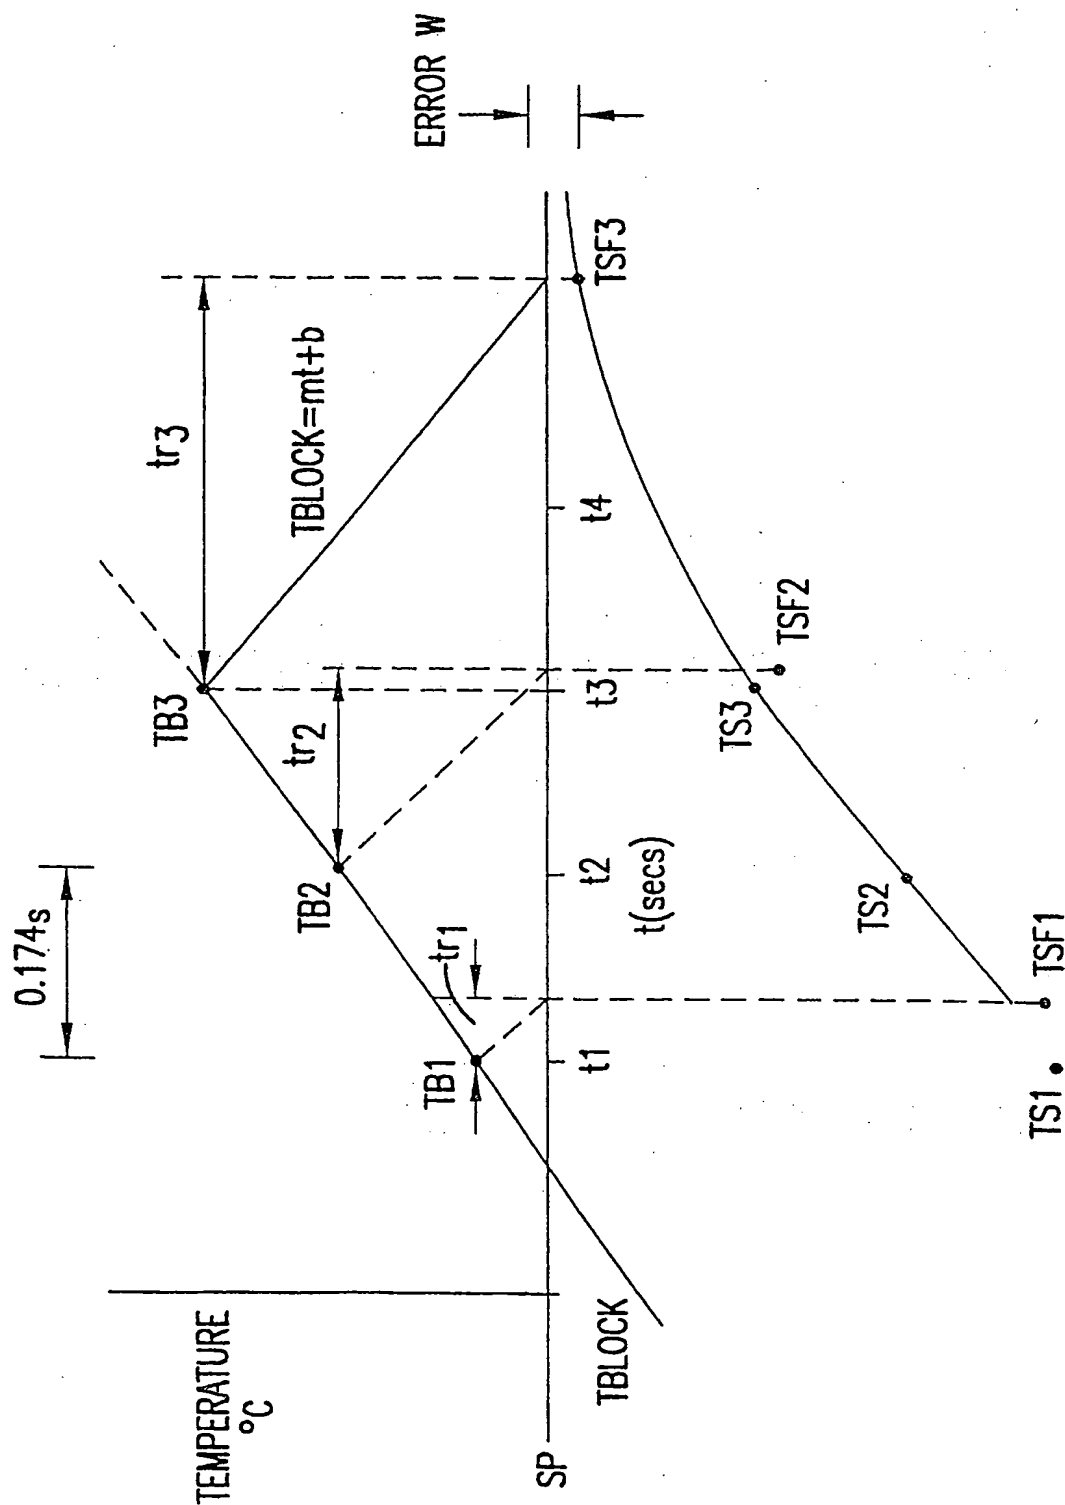


FIG.8

9/13

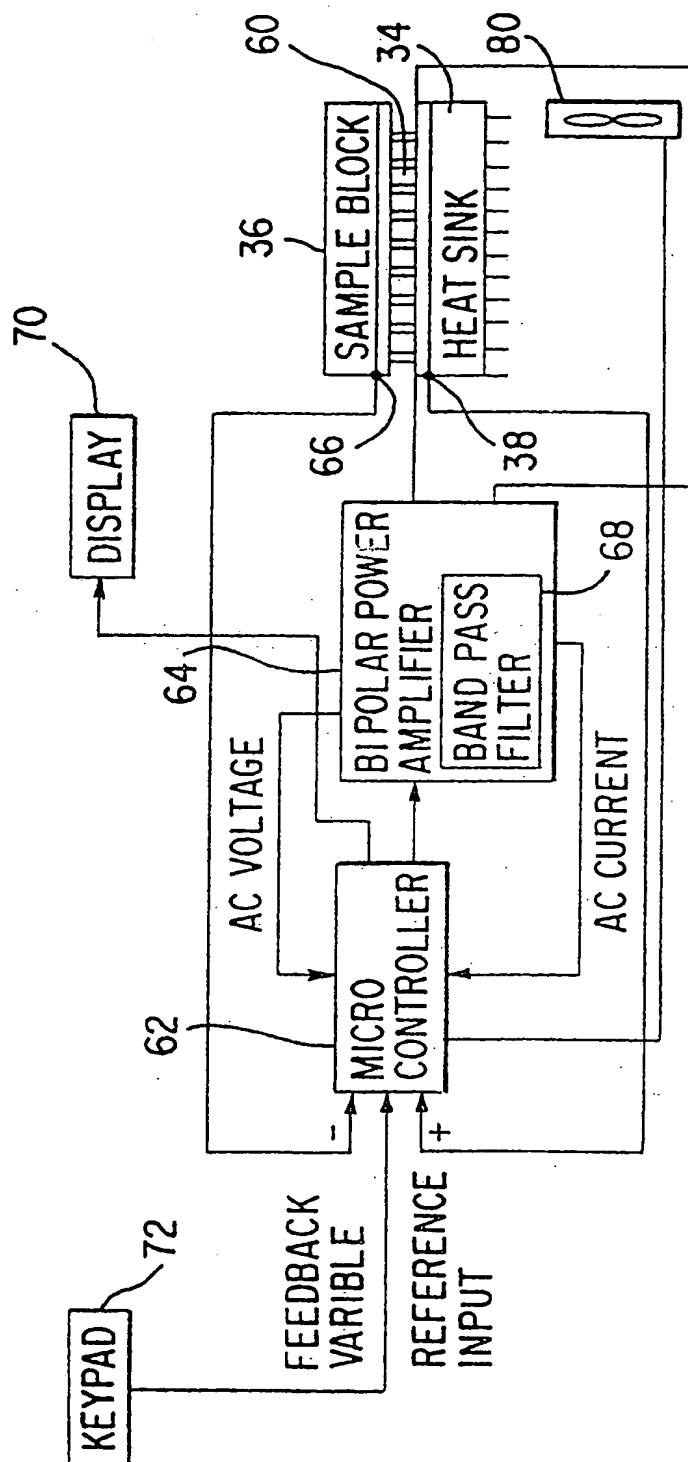


FIG. 9

10/13

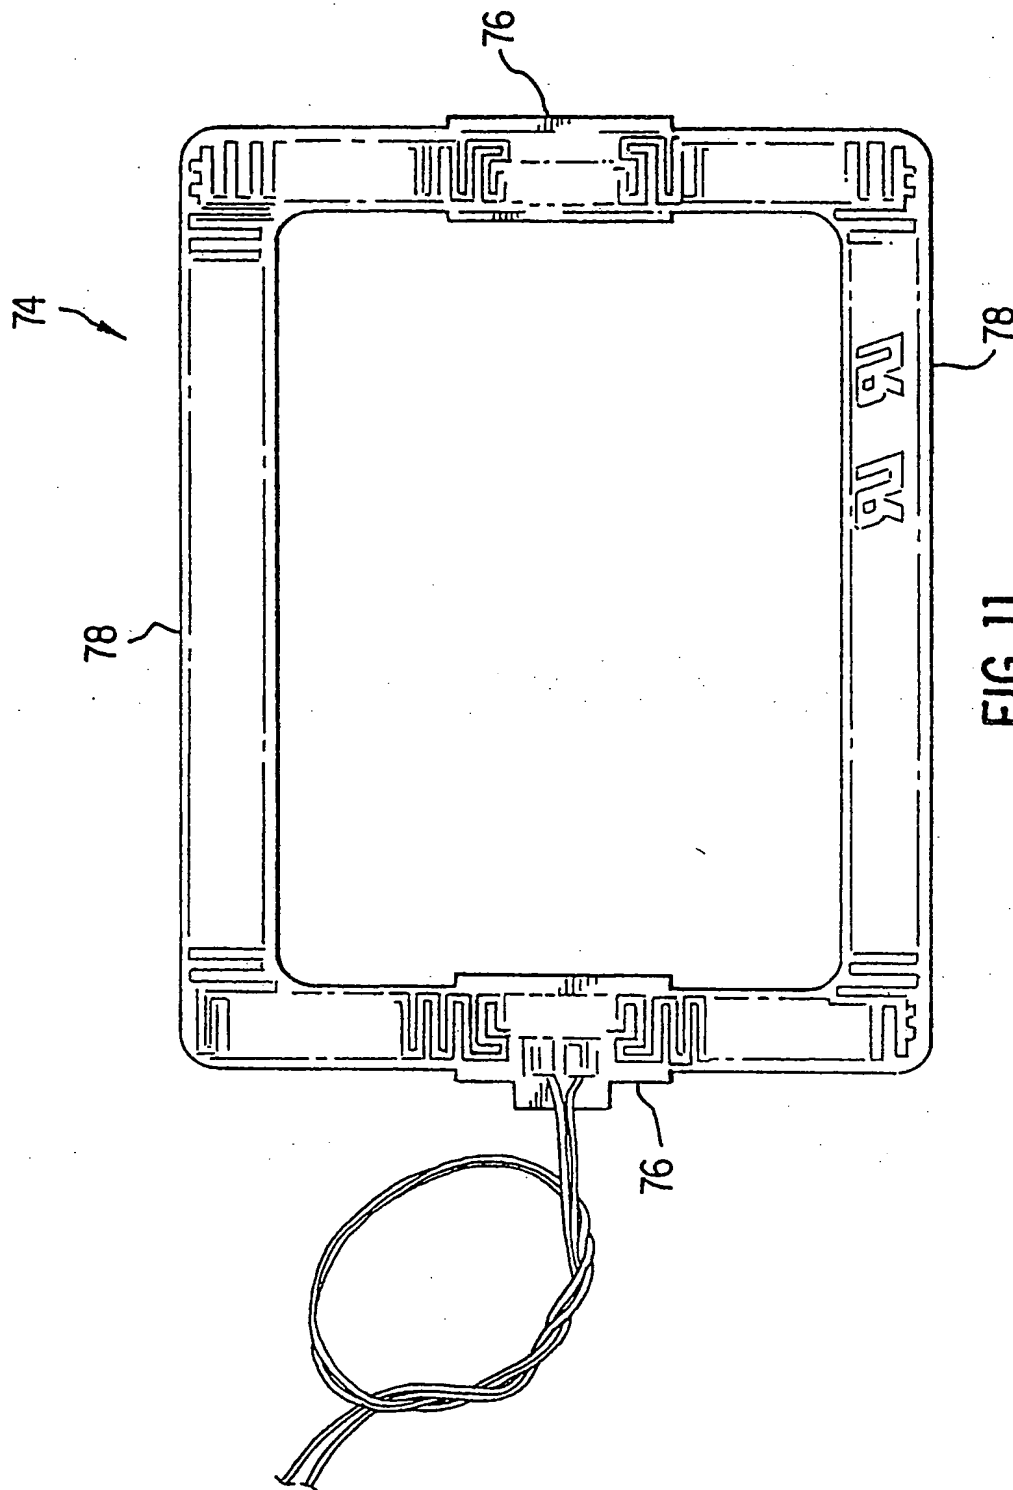


FIG. 11

11/13

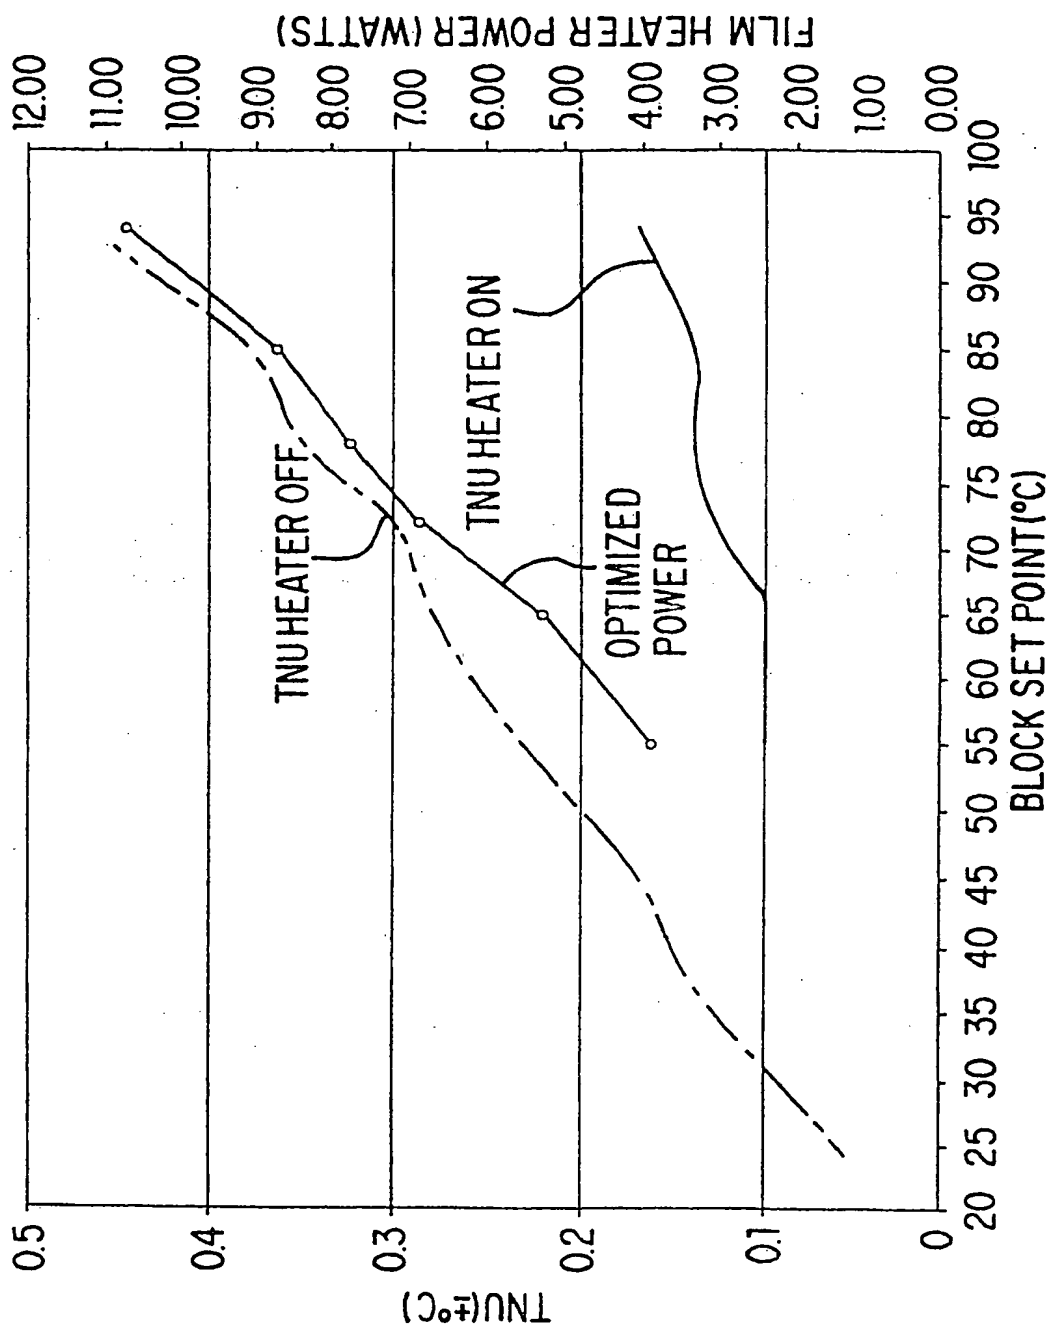


FIG.12

12/13

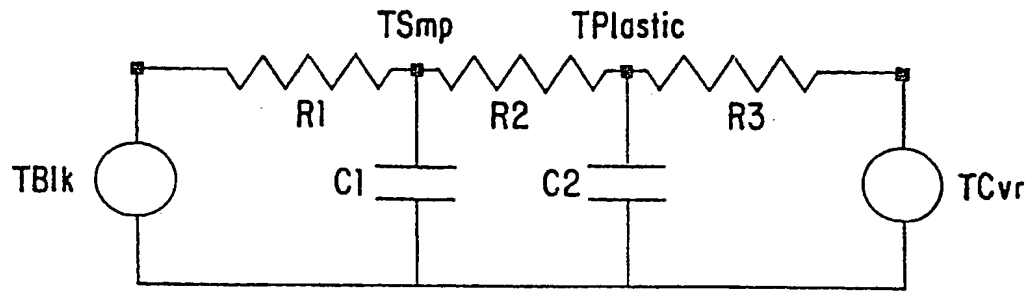


FIG. 13

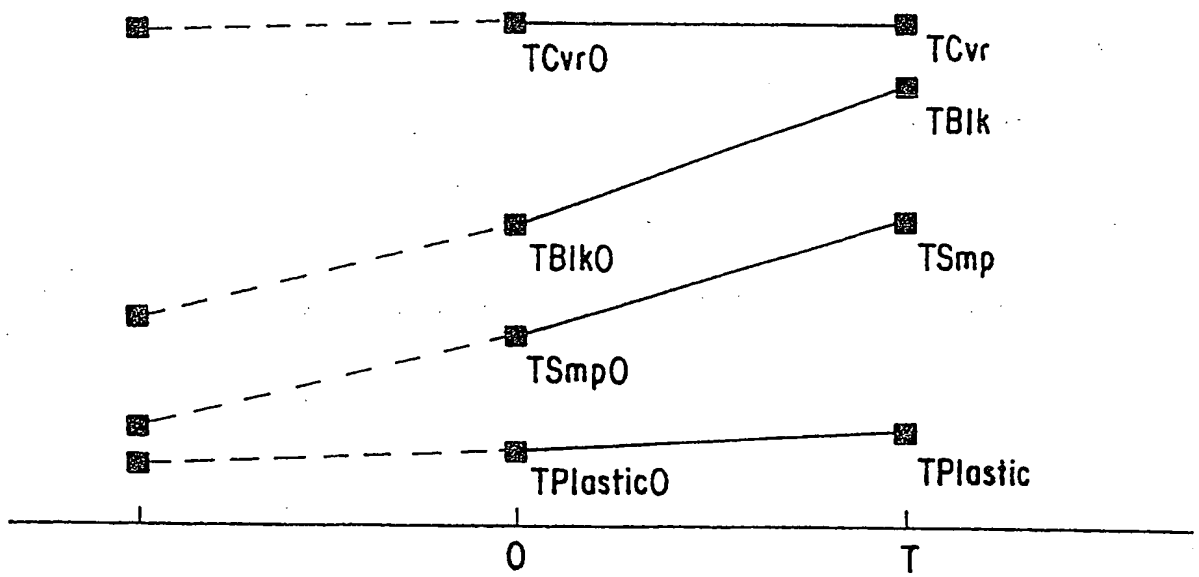


FIG. 14

13/13

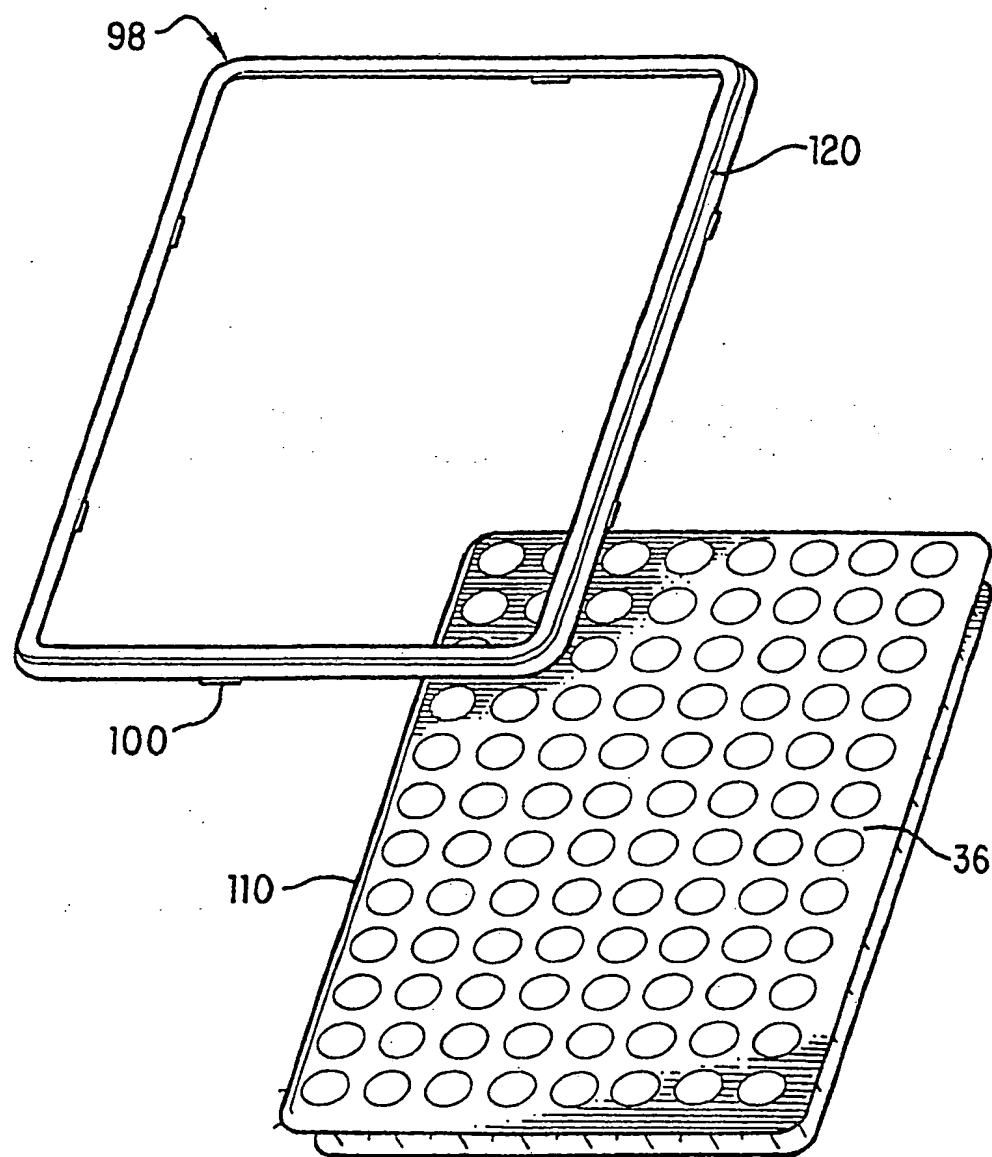


FIG. 15

INTERNATIONAL SEARCH REPORT

In tional Application No
PCT/US 98/06189

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 B01L7/00 C12Q1/68 H01L35/28 F25B21/02 G01R27/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 B01L F25B H01L G01R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 488 769 A (PERKIN ELMER CETUS INSTR) 3 June 1992 cited in the application see page 7, line 19 - line 30 see page 8, line 19 - line 48	1
A	see page 8, line 49 - line 51	2
A	see page 9, line 48 - page 10, line 12	34-38
A	see page 15, line 21 - line 50; figures 2,6,8	14,39
A	see page 16, line 7 - line 39; figures 9,13	2,22
A	see page 20, line 34 - page 21, line 29 see page 22, line 41 - line 57; figures 1,19	31
A	see page 23, line 16 - line 39; figure 15 see page 23, line 40 - line 47; figures 15,19	25
A	see page 35, line 19 - page 36, line 9; claim 99	32
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

8 October 1998

Date of mailing of the international search report

28.10.98

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Hocquet, A

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/06189

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>EP 0 342 155 A (AGROGEN STIFTUNG ;SEYFFER & CO (CH); KNOFF ULRICH CHRISTIAN (CH)) 15 November 1989 see column 3, line 12 - line 21; figures 2,3 see column 6, line 38 - column 7, line 20; figures 2-7</p>	39
X	<p>EP 0 642 831 A (HOFFMANN LA ROCHE) 15 March 1995</p>	1
A	see column 3, line 27 - column 5, line 7	2
A	see column 5, line 34 - column 6, line 16	
A	<p>EP 0 236 069 A (CETUS CORP) 9 September 1987 see page 9, line 20 - page 10, line 10; figures 1,3</p>	9
Y	<p>DE 40 37 955 A (SEIDL BERND) 6 June 1991 see column 1, line 3 - line 21; claims 1-7 see column 1, line 47 - column 2, line 18; figures</p>	34-38
A	<p>WO 93 09486 A (HYBAID LTD) 13 May 1993 see page 4, line 10 - line 17; claims 1,3,6 see page 7, line 1-5 see page 7, line 18 - line 35</p>	3-6 34-38
A	<p>US 5 410 130 A (BRAUNSTEIN ZACHARY L) 25 April 1995 see column 4, line 7 - line 34; figure 2</p>	2,22,23
A	<p>US 4 865 986 A (COY RICHARD A ET AL) 12 September 1989 see column 2, line 34 - line 58 see column 3, line 64 - column 4, line 5</p>	2
A	<p>US 5 040 381 A (HAZEN WILLIAM A) 20 August 1991 see column 1, line 27 - line 40 see column 2, line 3 - line 67; figure 1</p>	9,10
P,X	<p>WO 97 21089 A (PERKIN ELMER CORP) 12 June 1997 see page 8, line 10 - page 9, line 10; figures 1,2</p>	1,25
X	<p>EP 0 642 828 A (HOFFMANN LA ROCHE) 15 March 1995 see column 7, line 12 - column 8, line 40; figures 7-12</p>	1,25

-/--

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 98/06189

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 640 828 A (HOFFMANN LA ROCHE) 1 March 1995 see column 7, line 23 - line 35; figures 14-17	1,25
Y	see column 15, line 1 - line 13	25
Y	WO 95 27196 A (SANADI ASHOK R) 12 October 1995 see page 1, paragraph 2 see page 21, paragraph 2 - page 22, paragraph 1; figures 8,8A	1,25
A	US 5 248 934 A (ROVETI DENES K) 28 September 1993 see column 1, line 11 - line 17 see column 2, line 58 - line 68 see column 3, line 20 - line 23	26-28,40
A	US 4 881 038 A (CHAMPLIN KEITH S) 14 November 1989 see column 2, line 5 - line 15 see column 3, line 65 - column 4, line 4	28,40
A	US 5 441 576 A (BIERSCHENK JAMES L ET AL) 15 August 1995 see column 1, line 32 - line 59; figures see column 3, line 14 - line 47	28,40
A	US 5 431 021 A (GWILLIAM SCOTT B ET AL) 11 July 1995 see column 3, line 37 - line 39 see column 9, line 14 - line 40 see column 10, line 2 - column 12, line 35; figures 6A,9	30
A	US 5 385 022 A (KORNBLIT LEVY) 31 January 1995 see column 1, line 20 - line 46 see column 6, line 32 - line 48	30
A	EP 0 362 173 A (AFFARVERKET FFV) 4 April 1990 see column 1, line 47 - column 3, line 9	31
A	US 5 600 575 A (ANTICOLE ROBERT B) 4 February 1997 see column 6, line 51 - column 7, line 58; figures 4,5	31
A	US 4 639 883 A (MICHAELIS THEODORE D) 27 January 1987 see column 2, line 6 - line 16 see column 3, line 33 - column 4, line 23	31
	-/--	

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 98/06189

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 5 237 821 A (OKUMURA TAKUJI ET AL) 24 August 1993 see column 1, line 21 - line 55; figure 1B -----</p>	32

INTERNATIONAL SEARCH REPORT

I national application No.

PCT/US 98/06189

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

- | | |
|------------------------------|---------------|
| 1. CLAIMS: 01-24, 33-39 | 4. CLAIM : 30 |
| 2. CLAIM : 25 | 5. CLAIM : 31 |
| 3. CLAIMS: 26-27, 28, 29, 40 | 6. CLAIM : 32 |

FOR FURTHER INFORMATION PLEASE SEE FORM PCT/ISA/206 MAILED 17.07.98.

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

In ational Application No

PCT/US 98/06189

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0488769 A	03-06-1992	AT 165621 T	15-05-1998
		AU 696482 B	10-09-1998
		AU 2493495 A	07-12-1995
		AU 662494 B	07-09-1995
		AU 8832791 A	04-06-1992
		CA 2056743 A	30-05-1992
		DE 69129325 D	04-06-1998
		DE 69129325 T	10-09-1998
		DE 812621 T	13-08-1998
		DE 810030 T	24-09-1998
		EP 0812621 A	17-12-1997
		EP 0810030 A	03-12-1997
		GR 92300125 T	16-03-1993
		IL 100209 A	15-03-1995
		IL 111091 A	31-12-1995
		IL 111092 A	18-06-1996
		JP 6233670 A	23-08-1994
		NZ 240800 A	26-10-1995
		NZ 270628 A	26-10-1995
		NZ 270629 A	26-10-1995
		US 5282543 A	01-02-1994
		US 5710381 A	20-01-1998
		US 5602756 A	11-02-1997
		US 5475610 A	12-12-1995
EP 0342155 A	15-11-1989	CH 679282 A	31-01-1992
		CH 676332 A	15-01-1991
		CA 1317646 A	11-05-1993
		US 5061630 A	29-10-1991
EP 0642831 A	15-03-1995	CA 2130013 A	11-03-1995
		EP 0807467 A	19-11-1997
		EP 0807468 A	19-11-1997
		JP 7151764 A	16-06-1995
		US 5616301 A	01-04-1997
		US 5795547 A	18-08-1998
EP 0236069 A	09-09-1987	AT 152529 T	15-05-1997
		AU 612316 B	11-07-1991
		AU 6918087 A	27-08-1987

INTERNATIONAL SEARCH REPORT

Information on patent family members

In International Application No

PCT/US 98/06189

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0236069 A		AU 653932 B AU 7609291 A CA 1339653 A DE 3752057 D DE 3752057 T DE 776967 T DK 97887 A EP 0776967 A GR 92300087 T JP 2613877 B JP 62240862 A JP 7303468 A US 5333675 A US 5656493 A US 5038852 A	20-10-1994 12-09-1991 03-02-1998 05-06-1997 25-09-1997 20-11-1997 26-08-1987 04-06-1997 30-12-1992 28-05-1997 21-10-1987 21-11-1995 02-08-1994 12-08-1997 13-08-1991
DE 4037955 A	06-06-1991	DE 8914300 U	18-01-1990
WO 9309486 A	13-05-1993	AU 2804792 A	07-06-1993
US 5410130 A	25-04-1995	NONE	
US 4865986 A	12-09-1989	EP 0363143 A JP 2176910 A	11-04-1990 10-07-1990
US 5040381 A	20-08-1991	NONE	
WO 9721089 A	12-06-1997	AU 1144997 A CA 2207738 A EP 0809796 A	27-06-1997 05-06-1997 03-12-1997
EP 0642828 A	15-03-1995	AT 166251 T AU 671234 B AU 7282094 A CA 2130517 A CN 1108154 A DE 59405998 D ES 2117743 T JP 2764011 B JP 7167865 A	15-06-1998 15-08-1996 30-03-1995 11-03-1995 13-09-1995 25-06-1998 16-08-1998 11-06-1998 04-07-1995

INTERNATIONAL SEARCH REPORT

Information on patent family members

In International Application No

PCT/US 98/06189

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0642828 A		NZ 264389 A	25-06-1996
		US 5720406 A	24-02-1998
EP 0640828 A	01-03-1995	AU 681682 B	04-09-1997
		AU 7141494 A	09-03-1995
		BR 9403338 A	11-04-1995
		CA 2129787 A	28-02-1995
		CN 1107892 A	06-09-1995
		CZ 9402078 A	15-11-1995
		FI 943936 A	28-02-1995
		HU 71622 A	29-01-1996
		JP 7163397 A	27-06-1995
		NO 943166 A	28-02-1995
		PL 304805 A	06-03-1995
		SG 47865 A	17-04-1998
		ZA 9406330 A	28-02-1995
WO 9527196 A	12-10-1995	AU 2122395 A	23-10-1995
		US 5741463 A	21-04-1998
US 5248934 A	28-09-1993	NONE	
US 4881038 A	14-11-1989	US 4825170 A	25-04-1989
		AT 124541 T	15-07-1995
		CA 1295680 A	11-02-1992
		DE 68923281 D	03-08-1995
		DE 68923281 T	22-02-1996
		EP 0417173 A	20-03-1991
		JP 3504538 T	03-10-1991
		WO 8911650 A	30-11-1989
US 5441576 A	15-08-1995	NONE	
US 5431021 A	11-07-1995	AU 5683294 A	22-06-1994
		CN 1094500 A	02-11-1994
		WO 9412833 A	09-06-1994
		US 5385020 A	31-01-1995
US 5385022 A	31-01-1995	AU 7724794 A	27-03-1995
		WO 9507441 A	16-03-1995

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/06189

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0362173 A	04-04-1990	SE 464595 B	13-05-1991
		AT 108276 T	15-07-1994
		CA 1337304 A	10-10-1995
		DE 68916606 D	11-08-1994
		DE 68916606 T	10-11-1994
		ES 2059824 T	16-11-1994
		JP 2122226 A	09-05-1990
		JP 2732307 B	30-03-1998
		SE 8803459 A	30-03-1990
		US 5143451 A	01-09-1992
US 5600575 A	04-02-1997	NONE	
US 4639883 A	27-01-1987	NONE	
US 5237821 A	24-08-1993	JP 2033576 A	02-02-1990
		JP 2542239 B	09-10-1996
		EP 0377740 A	18-07-1990
		WO 8901594 A	23-02-1989
		JP 1131856 A	24-05-1989
		JP 2522692 B	07-08-1996

IMPROVEMENTS IN THERMAL CYCLER FOR PCR

FIELD OF THE INVENTION

This invention pertains to the field of computer controlled instruments for performing the Polymerase Chain Reaction (PCR). More particularly, the invention pertains to automated instruments that perform the reaction simultaneously on many samples and produce very precise results by using thermal cycling.

BACKGROUND OF THE INVENTION

The background of the invention is substantially as stated in U.S. Patent No. 5,475,610 which is herein incorporated by reference.

To amplify DNA (Deoxyribose Nucliec Acid) using the PCR process, it is necessary to cycle a specially constituted liquid reaction mixture through several different temperature incubation periods. The reaction mixture is comprised of various components including the DNA to be amplified and at least two primers sufficiently complementary to the sample DNA to be able to create extension products of the DNA being amplified. A key to PCR is the concept of thermal cycling: alternating steps of melting DNA, annealing short primers to the resulting single strands, and extending those primers to make new copies of double-stranded DNA. In thermal cycling the PCR reaction mixture is repeatedly cycled from high temperatures of around 90°C for melting the DNA, to lower temperatures of approximately 40°C to 70°C for primer annealing and extension. Generally, it is desirable to change the sample temperature to the next temperature in the cycle as rapidly as possible. The chemical reaction has an optimum temperature for each of its stages. Thus, less time spent at non optimum temperature means a better chemical result is achieved. Also a minimum time for holding the reaction mixture at each incubation temperature is required after each said incubation temperature is reached. These minimum incubation times establish the minimum time it takes to complete a cycle. Any time in transition between sample incubation temperatures is time added to this minimum cycle time. Since the number of cycles is fairly large, this

additional time unnecessarily heightens the total time needed to complete the amplification.

In some previous automated PCR instruments, sample tubes are inserted into sample wells on a metal block. To perform the PCR process, the temperature of the metal block is cycled according to prescribed temperatures and times specified by the user in a PCR protocol file. The cycling is controlled by a computer and associated electronics. As the metal block changes temperature, the samples in the various tubes experience similar changes in temperature. However, in these previous instruments differences in sample temperature are generated by non-uniformity of temperature from place to place within the sample metal block. Temperature gradients exist within the material of the block, causing some samples to have different temperatures than others at particular times in the cycle. Further, there are delays in transferring heat from the sample block to the sample, and those delays differ across the sample block. These differences in temperature and delays in heat transfer cause the yield of the PCR process to differ from sample vial to sample vial. To perform the PCR process successfully and efficiently, and to enable so-called quantitative PCR, these time delays and temperature errors must be minimized to the greatest extent possible. The problems of minimizing non-uniformity in temperature at various points on the sample block, and time required for and delays in heat transfer to and from the sample become particularly acute when the size of the region containing samples becomes large as in the standard 8 by 12 microtiter plate.

Another problem with current automated PCR instruments is accurately predicting the actual temperature of the reaction mixture during temperature cycling. Because the chemical reaction of the mixture has an optimum temperature for each of its stages, achieving that actual temperature is critical for good analytical results. Actual measurement of the temperature of the mixture in each vial is impractical because of the small volume of each vial and the large number of vials.

SUMMARY OF THE INVENTION

According to the invention, there is provided an apparatus for performing the Polymerase Chain Reaction comprising an assembly capable of cycling samples through a series of temperature excursions, a heated cover and a computer to control the process.

The invention further encompasses a sample block with low thermal mass for rapid temperature excursions. The sample block is preferably manufactured from silver for uniform overall heat distribution and has a bottom plate for uniform lateral heat distribution. In addition, to further offset heat losses and resulting temperature gradients from the center to the edges, a center pin is used as a conducting path to a heat sink.

The invention also provides a method and apparatus for achieving rapid heating and cooling using Peltier thermoelectric devices. These devices are precisely matched to each other. They are constructed using die cut alumina on one side to minimize thermal expansion and contraction. The devices are constructed of bismuth telluride using specific dimensions to achieve matched heating and cooling rates. They are designed using minimal copper thicknesses and minimal ceramic thicknesses to further reduce their heat load characteristics and are assembled using a specific high temperature solder in specified quantities.

The invention is also directed to a heatsink constructed with a perimeter trench to limit heat conduction and losses from its edges. Furthermore, the heatsink has an associated variable speed fan to assist in both maintaining a constant temperature and in cooling.

The invention is also directed to a clamping mechanism to hold the sample block to the heat sink with the thermoelectric devices positioned in between. The mechanism is designed to provide evenly distributed pressure with a minimal heat load. The design allows the use of thermal grease as an interface between the sample block, and the thermoelectric devices and between the thermoelectric devices and the heatsink.

There is also provided a perimeter heater to minimize the thermal non-uniformity across the sample block. The perimeter heater is positioned around the sample block to counter the heat loss from the edges. Power is applied to the heater in proportion to the

sample block temperature with more power applied when the sample block is at higher temperatures and less power applied when the sample block is at lower temperatures.

There is also provided a heated cover, designed to keep the sample tubes closed during cycling and to heat the upper portion of the tubes to prevent condensation. The heated cover applies pressure on the sample tube cap perimeter to avoid distorting the cap's optical qualities. The cover is self-aligning, using a skirt which mates with a sample tube tray.

The invention is also directed to a method and apparatus for determining an ideal temperature ramp rate which is determined so as to take advantage of sample block temperature overshoots and undershoots in order to minimize cycle time.

The invention also includes a method and apparatus for characterizing the thermal power output from the thermal electric cooling devices to achieve linear temperature control and linear and non-linear temperature ramps.

The invention is further directed to a method for predicting the actual temperature of the reaction mixture in the sample vials at any given time during the PCR protocol.

The invention also includes a method and apparatus for utilizing calibration diagnostics which compensate for variations in the performance of the thermoelectric devices so that all instruments perform identically. The thermal characteristics and performance of the assembly, comprised of the sample block, thermal electric devices and heatsink, is stored in an on-board memory device, allowing the assembly to be moved to another instrument and behave the same way.

The invention further includes a method and apparatus for measuring the AC resistance of the thermoelectric devices to provide early indications of device failures.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a cross sectional view of a portion of the sample block according to the invention.

Figure 2 is an enlarged, isometric view of a thermal electric device constructed according to the invention.

Figure 2A is a side, elevational view of a thermal electric device constructed according to the invention.

Figure 3 is a cut-away, partial, isometric view of the heatsink according to the invention.

Figure 4 is an exploded view of an assembly including a sample block, thermoelectric devices and heatsink.

Figure 5 is an isometric view of the heated cover in accordance with the invention.

Figure 6 is a chart depicting the Up Ramp (heating rate) vs. Power.

Figure 7 is a chart depicting the Down Ramp (cooling rate) vs. Power.

Figure 8 is a chart for predicting and compensating for temperature overshoots and undershoots in accordance with the invention.

Figure 9 is a block diagram of the AC resistance measurement circuit of the invention.

Figure 10 shows a perimeter heater and its location surrounding the sample block.

Figure 11 is a detailed view of the perimeter heater of Figure 10.

Figure 12 shows the power applied to the perimeter heater as a function of the temperature of the sample block.

Figure 13 shows a thermal model of a sample in a sample vial.

Figure 14 is an illustration of the initial conditions of the thermal model of Figure 13.

Figure 15 shows the sample block and a seal designed to protect the thermal electric devices from the environment.

DETAILED DESCRIPTION OF THE INVENTION

Generally, in the case of PCR, it is desirable to change the sample temperature between the required temperatures in the cycle as quickly as possible for several reasons. First the chemical reaction has an optimum temperature for each of its stages and as such less time spent at non-optimum temperatures means a better chemical result is achieved. Secondly a minimum time is usually required at any given set point which sets a minimum cycle time for each protocol and any time spent in transition between set points adds to this minimum time. Since the number of cycles is usually quite large, this transition time can significantly add to the total time needed to complete the amplification.

The absolute temperature that each reaction tube attains during each step of the protocol is critical to the yield of product. As the products are frequently subjected to quantitation, the product yield from tube to tube must be as uniform as possible and therefore both the steady-state and dynamic thermal uniformity must be excellent across the block.

Heat-pumping into and out of the samples is accomplished by using Peltier thermoelectric devices. These are constructed of pellets of n-type and p-type bismuth telluride connected alternately in series. The interconnections between the pellets is made with copper which is bonded to a substrate, usually a ceramic (typically alumina).

The amount of heat-pumping required is dependent on the thermal load and the ramp rate, that is, the rate at which the temperature is required to change. The sample tube geometry and sample volumes are not variables as the sample tubes are established as an industry standard, fitting into many other types of instruments such as centrifuges. The sample volume is defined by user need. Therefore the design variables primarily affect the sample block, thermoelectric devices, heatsink, fan and the thermal interface media between the thermoelectric devices and both the heatsink and the sample block.

The block geometry must also meet the necessary thermal uniformity requirements because it is the primary contributor to lateral conduction and therefore evens out any variation in thermal uniformity of the thermoelectric coolers themselves. The conflicting requirements of rapid ramp rates (indicating low thermal mass) and high lateral conduction (indicating a large material mass) are met by concentrating the bulk of the block structure in a base plate, and minimizing the thermal mass of the upper portion of the block which holds the sample tubes. The optimal material for block fabrication is pure silver which has relatively low thermal mass and very good thermal conduction. Silver also lends itself well to electroforming. In practice the optimal block geometry has a light electroformed upper portion to hold the sample tubes fixed to a relatively thick base plate which provides lateral conduction. The thermal mass of the block is concentrated in the base plate where the material contributes the most to thermal uniformity. The electroformed portion of the block has a minimum thickness which is defined by two parameters: first, the material cannot be so thin as to make it too delicate

for normal handling; second, the wall thickness is required to conduct heat out of the upper regions of the sample tube. Circulation in the sample itself is achieved by convection inside the tube and sample temperature is relatively uniform along the height of the tube, but good thermal conductivity between the tube walls and the base plate increases the effective surface area available for conduction of heat between the sample and the base plate. The base plate thickness has a minimum value defined by lateral conduction requirements which is a function of the thermal uniformity of the thermoelectric coolers and structural rigidity.

Another contributor to the thermal mass is the alumina ceramic layers which form part of the structure of the thermoelectric cooler itself. There are two alumina layers in the construction of the thermoelectric cooler, one on the sample block side and another on the heatsink side. The thickness of the layers should be minimized as much as possible, in this case the practical limit of thinness for the alumina thickness is defined by the manufacturing requirements of thermoelectric cooler fabrication. This particular layer of ceramic could in principal be replaced by a different layer altogether such as a thin sheet of Kapton which would reduce the thermal mass even more, but at the present time although coolers are available with this structure, reliability is unproven. It is anticipated that once the technology has been developed further, then a cooler of such a design may be preferred. However, the thin alumina layers also contribute to system reliability.

The copper conductors within the cooler are a significant thermal load and are not overlooked in the design of the system. The thickness of the copper traces is defined by the requirement of carrying current through the device. Once the current is known the required copper thickness can be calculated.

Sample Block

Figure 1 shows a cross sectional view of a portion of the sample block 36 which typically has 96 wells 20, each for receiving a sample vial. The sample block is constructed of silver and comprises an upper support plate 21 and the sample wells 20 electroformed as one piece fastened to a base plate 22. The base plate 22 provides lateral conduction to compensate for any difference in the thermal power output across the

surface of each individual thermal electric device and for differences from one thermal electric device to another.

There are always boundary losses in any thermal system. In a rectangular configuration there is more heat loss in the corners. One solution is to use a round sample block, but the microtiter tray format that is in common usage is rectangular and this must be used to retain compatibility with other existing equipment. Once the edge effects have been eliminated using all standard means, such as insulation etc., there remains a tendency for the center of the sample block to be warmer than the corners. Typically it is this temperature difference that defines the thermal uniformity of the sample block. In accordance with the invention, the center temperature is reduced by providing a small thermal connection from the center of the sample block to the heat sink. By using a pin 24 which acts as a "heat leak" in the center of the sample block, the temperature gradient across the sample block can be reduced to an acceptable level. The amount of conduction required is quite small and a 1.5mm diameter stainless steel pin has been found to be sufficient. Moreover, a pin made of the polymer ULTEM, manufactured by General Electric may also be used. As more fully described below, the pin also serves to help position and lock into place components of the assembly illustrated in Figure 4.

Peltier Thermal Electric Devices (TED's)

Thermal uniformity of the sample block is critical to PCR performance. One of the most significant factors affecting the uniformity is variations in the thermal electric device performance between devices. The most difficult point at which to achieve good uniformity is during a constant temperature cycle far from ambient. In practice this is a constant temperature cycle at approximately 95°C. The thermal electric devices are matched under these conditions to make a set of devices for each heatsink assembly which individually produce the same temperature for a given input current. The thermal electric devices are matched to within 0.2°C in any given set, this value being derived from the maximum discrepancy that can be rectified by the lateral conduction of the sample block baseplate.

Figure 2A shows a side view of a typical Peltier thermal electric device 60. The device is composed of bismuth telluride pellets 30, sandwiched between two alumina layers 26. The pellets are electrically connected by solder joints 28 to copper traces 29 plated onto the alumina layers. One alumina layer has an extension 31 to facilitate electrical connections. The thickness of the extended areas is reduced to decrease the thermal load of the device.

Figure 2 shows an isometric view of a typical Peltier thermal electric device. The alumina layer 26 that forms the outer wall of the thermal electric device, expands and contracts during temperature cycling at a different rate than the sample block 19. The motion of the alumina is transmitted directly to the solder 28 connecting the internal bismuth telluride pellets 30. This motion can be reduced dramatically by cutting the alumina into small pieces 32 called die so that the field of expansion is small. The minimum size of the die is defined by the size of the copper traces required to carry current through the thermal electric device and the requirements that the device retain some strength for handling.

Using thin alumina layers in the thermal electric device (of the order of 0.508 mm) not only reduces the thermal load but also means that for a given required heat pumping rate the temperature that the ends of the pellet reaches is reduced due to the increase in thermal conductivity k . This enhances reliability by reducing the thermal stress on the solder joint.

Generally in PCR the reaction temperatures are above ambient and in the range 35 to 96°C. In the most important cases the block is heated or cooled between two above ambient temperatures where the flow of heat due to conduction is from the block to the heat sink. The key to optimizing the system cycle time, given an optimized block configuration, is to balance the boost to the ramp rate when cooling provided by the conduction, against the boost provided to the heating ramp rate by the Joule effect of resistance heating.

If the cross-section of the bismuth telluride pellets in a given thermal electric device were considered constant, the heating ramp rate would be increased by increasing the height of the pellet. This is because the conduction path through the thermal electric

device would be made longer thereby decreasing k . This also has the effect of reducing the current required to maintain a given block temperature in the steady state. During the down ramp, i.e. cooling the block, the decreased k means that the conduction contribution will be reduced and so the down ramp rate will be reduced.

Conversely, if the height of the bismuth telluride pellet were to be decreased for a given cross-section, then k would be increased. This would increase the current required to maintain an elevated temperature in the steady state and would increase the cooling ramp rate. Heating ramp rates would be reduced as a larger portion of the heat in the block would be conducted directly to the heat sink. Decreasing the bismuth telluride pellet height also increases the holding power required for a given temperature due to the losses through the thermal electric devices and reduces the thermal load, increasing the maximum possible ramp rate for given power. Therefore the optimized thermal electric device can be derived by adjusting the height of the Bismuth Telluride pellets until the heating rate matches the cooling rate.

The ratio $l:A$ for the pellets also defines the resistance of the device i.e.

$$R = nr(h/A)$$

where n is the number of pellets, r is the resistivity of the Bismuth Telluride being used, h is the height of the pellet and A is the cross-sectional area.

The resistance must be measured as an AC resistance because of the Seebeck effect. Because the geometry defines the resistance of the device, another design boundary is encountered in that the device must use a cost effective current to voltage ratio because too high a current requirement pushes up the cost of the amplifier. The balanced solution for the silver electroformed block described above is :

Pellet height = 1.27mm

Pellet cross-sectional area = 5.95mm²

If the thermal cyclers were to be used as part of another instrument, e.g. integrated with detection technology, then it may be more convenient to use a different current source which would lead to a modified thermal electric device geometry. The current source in the present embodiment consists of a class D type switch-mode power amplifier with a current sensing resistor in series with the device and ground.

Because the thermal electric devices are soldered together, excess solder can wick up the side of the bismuth telluride pellets. Where this occurs, k is increased which results in a local cold spot, also called a mild spot. These cold spots are reduced in number and severity by application of the minimum amount of solder during the assembly process of the thermal electric device. For the same reason, it is also necessary to ensure that the solder used to attach the connecting wires to the thermal electric device does not contact the pellet.

High temperature solder has been shown to not only have improved high temperature performance but it is also generally more resistant to failure by stress reversals and hence is most appropriate in this application. The solder used in this invention may be of the type as described in U.S. Patent 5,441,576.

Heatsink

Figure 3 shows the heatsink 34 assembled with the thermal electric devices 39 and the sample block 36. A locating frame 41 is positioned around the thermal electric devices to align them with the sample block and the heatsink to ensure temperature uniformity across the sample block. The frame is composed of Ultem or other suitable material and has tabs 43 at its corners to facilitate handling. The heatsink 34 has a generally planar base 34 and fins 37 extending from base 35. The thermal mass of the heat sink is considerably larger than the thermal mass of the sample block and samples combined. The sample block and samples together have a thermal mass of approximately 100 joules/°K and that of the heat sink is approximately 900 joules/°K. This means that the sample block clearly changes temperature much faster than the heat sink for a given amount of heat pumped. In addition the heat sink temperature is controlled with a variable speed fan as shown in Figure 9). The temperature of the heat sink is measured by

a thermistor 38 placed in a recess 40 within the heatsink and the fan speed is varied to hold the heat sink at approximately 45°C which is well within the normal PCR cycling temperature range, where maintaining a stable heat sink temperature improves the repeatability of system performance. When the block temperature is set to a value below ambient then the heat sink is set to the coolest achievable temperature to reduce system power consumption and optimize block thermal uniformity. This is accomplished simply operating the fan at full speed.

The heat sink temperature measurement is also used by the thermal electric device control algorithm described below in linearizing the thermal output power from the thermal electric devices.

The heatsink temperature uniformity is reflected in the uniformity of the block temperature. Typically the heatsink is warmer in the middle than it is at the edges and this adds to other effects that lead to the corners of the block being the coldest. A trench 44 is cut into the heat sink outside the perimeter of the thermal electric device area to limit the conduction of heat and decreases edge losses from the area bounded by the trench.

Thermal Interface and Clamping Mechanism

Thermal electric device manufacturers recommend that thermal electric devices be held under pressure to improve life-expectancy. (The pressure recommended is often defined by the thermal interface media selected.) The pressure that is recommended varies from manufacturer to manufacturer but is in the range of 30 to 100 psi for cycling applications.

There are many thermal interface media available in sheet form which can be used to act as a compliant layer on each side of the thermal electric devices, but it has been demonstrated that thermal grease gives far superior thermal performance for this application. Unlike other compliant sheets which have been shown to require 30 psi or more even under optimal conditions. Thermal grease does not require high pressure to ensure that good thermal contact has been made. Also thermal grease acts as an effective lubricant between the expanding and contracting silver block and the thermal electric

device surface, enhancing life-expectancy. Thermalcote II thermal grease manufactured by Thermalloy, Inc. may be used.

Because the silver block is relatively flexible and soft it cannot transmit lateral clamping pressure very effectively. However, because the thermal interface media is thermal grease, the clamping force required is low.

Figure 4 shows an exploded view of the assembly with the preferred embodiment of the clamping mechanism. Each clamp 46 is made up of a series of fingers 48 extending from a spine 49. The fingers 48 are sized, shaped and spaced so as to fit between the wells 20 of the sample block 36 and thus apply pressure at a corresponding series of points on the base plate 22 of the sample block 36. The open honeycomb structure of the electroformed sample wells allows the fingers to be inserted some distance into the block, thereby applying the pressure more evenly than an edge clamping scheme would. These fingers apply pressure at a series of local points to minimize the contact area between the mass of the clamp and the sample block so that the clamp does not add significantly to the thermal load. The clamps are molded from a glass filled plastic which has the necessary rigidity for this application. The pressure is applied by deforming the fingers with respect to mounting posts 50 which may be separate clamp structures, but are preferably integrally formed with the clamps 46. The clamps 46 are held flush to the surface of the heat sink with a series of screws 52 extending through corresponding hole 53 in clamps 46 and then into threaded holes 55 in heatsink 34. This scheme eliminates the necessity to set the pressure with adjustment screws as the clamps can simply be tightened down by standard torqueing techniques.

The resulting even pressure distribution ensures that the full area of the thermal electric devices is in good thermal contact with the block and the heatsink reducing local thermal stresses on the thermal electric devices.

Figure 4 shows other important features of the invention. A printed circuit board 82 a memory device 96 for storing data and surrounds the thermal electric devices and provides electrical connections. Alignment pins 84 are seated in holes 86 in the heatsink and protrudes through alignment holes 88 to align the printed circuit board with the heatsink. The locating frame 41 is positioned around the thermal electric devices and has

a cross beam 90 with a through hold 92. Pin 24 (shown in Figure 1) fits into a hole (not shown) in the sample block, extends through hold 92 in the locating frame and further extends into hole 94 in the heatsink.

Perimeter Heater

In order to bring the temperature uniformity across the sample block to approximately $\pm 0.2^{\circ}\text{C}$, a perimeter heater is positioned around the sample block to eliminate heat losses from its edges. Preferably, the heater is a film type, having low mass with inside dimensions slightly larger than the sample block. Figure 10 shows the perimeter heater 74 and its approximate location surrounding the sample block 36. The heater is not fastened in place, it is simply positioned in the air around the perimeter of the sample block in order to warm the air in the immediate vicinity.

Figure 11 shows a detailed view of the perimeter heater 74. The heater is rectangular as determined by the dimensions of the sample block and is manufactured so that it has separate power densities in specific areas to reflect the varying amounts of heat loss around the perimeter of the block. Matching lower power density regions 76 (0.73 W/in^2) are located in the center portions of the short sides of the rectangle and matching higher power density regions 78 (1.3 W/in^2) are located in the longer sides, extending into the shorter sides.

As shown in Figure 12, the power applied to the perimeter heater is regulated to correspond to the temperature of the sample block, with more power applied to the heater at higher block temperatures and less applied at lower block temperatures.

Heated Cover:

Figure 5 shows the heated cover 57. The heated cover applies pressure to the sample vial caps to ensure that they remain tightly closed when the sample is heated.

Further, pressure transferred to the vials assures good thermal contact with the sample block. The cover is heated under computer control to a temperature above that of the sample to ensure that the liquid does not condense onto the tube cap and instead remains in the bottom of the tube where thermal cycling occurs. This is described in

United States Patent No. 5,475,610, mentioned above. The heated platen 54 in the present invention does not press on the dome of the cap but instead presses on the cap perimeter. The platen has a surface shaped in this manner so that optical caps are not distorted by the application of pressure. Thus, tubes that have been cycled can be directly transferred to an optical reader without the need to change the cap.

Because the heated platen has recesses 56 in it to clear the cap domes, there is a need to align the plate to the tube positions before applying pressure to avoid damage to the tubes. This is accomplished by use of a "skirt" 58 around the perimeter of the platen which aligns to the microtiter tray before the plate touches the tube caps. The cover has a sliding mechanism similar to that used on the PYRIS Differential Scanning Calorimeter by the Perkin Elmer Corporation allowing the cover to slide back to allow sample vials to be inserted into the sample block and forward to cover the sample block and move down engage the vials.

Determining the Ideal Ramp Rate:

The optimized ramp rate has been empirically determined to be 4°C/sec. Any system which has a higher block ramp rate than this cannot fully utilize the benefits temperature of overshoots and consequently achieves an insignificant reduction in cycle time.

Figure 6 is a chart depicting the Up Ramp (heating rate) vs. Power and Figure 7 is a chart depicting the Down Ramp (cooling rate) vs. Power.

When heating the block to a temperature above ambient, the Joule heating and the Seebeck heat pumping both act to heat the sample block against conduction. When cooling the block between two temperatures above ambient, the Seebeck heat pumping and conduction act against the Joule heating. During cooling, significant power is required to hold the block temperature steady against the flow of heat out of the block by conduction. Therefore even with zero power applied, the block will cool at a significant rate. As the current is increased, the Seebeck effect increases the cooling obtained. However as the current is increased further the joule effect, which is proportional to the square of the current, quickly starts to take over acting against the Seebeck cooling.

Therefore a point is reached where applying additional power acts against the required effect of cooling. In the heating mode these two effects act together against conduction and no ceiling is reached. In practice the heating power vs. input current is approximately linear. This is why the design criteria centers around meeting the cooling rate requirements; the heating rate can always be achieved by the application of more power.

Characterizing the Output of the TED's

The following equation describes the total heat flow from the cold side of a thermal electric cooler.

$$0 = 1/2 * R(t_{avg}) * I^2 + t_c * S(t_{avg}) * I - (k(t_{avg}) * (t_c - t_h) + Q_c)$$

where

- t_c = cold side temperature of cooler
- t_h = hot side temperature of cooler
- t_{avg} = average of t_c and t_h
- $R(t)$ = electrical resistance of cooler as a function of temperature
- $S(t)$ = Seebeck coefficient of the cooler as a function of temperature
- $K(t)$ = Conductance of cooler as function of temperature
- I = electrical current applied to cooler
- Q_c = total heat flow from the cold side of the cooler

Given a desired heat flow, Q_c , and the hot and cold side temperatures, t_c and t_h , the equation is solved for I , the current required to produce Q_c . The solution of this equation is used for three purposes:

- 1) To achieve linear temperature transitions or ramps.

For linear temperature transitions, constant thermal power is required. To maintain constant thermal power when temperatures t_c and t_h are changing, it is necessary to solve for I in equation 1 periodically. The result is the current then applied to the

coolers. To compensate for errors a proportional integral derivative (PID) control loop is applied where:

Error input to PID = Set point Rate - Actual Rate

and Output from the PID is interpreted as percent Q

2) To achieve a linear PID temperature set point control algorithm over the desired temperature range:

Input to the PID control is the error signal t_c - Set point.

Output from the PID control is interpreted as a % of Q_{max} .

Equation 1 is used to determine the current value, I , which will result in the % of Q_{max} output by the PID control, under the current temperature conditions.

3) To achieve non-linear temperature transitions or ramps where temperature transitions are defined by the derivative of temperature with respect to time, dT/dt , as a function of block temperature.

This function is approximated by a table containing Block temperature T , dT/dt data points in 5 C increments for cooling and by a linear equation for heating. The small effect of sample mass on dT/dt profiles, although measurable, is ignored. Knowing the total thermal mass, MC_p (joules/ $^{\circ}K$), involved during temperature transitions, the amount of thermal power, Q (joules/sec), required to achieve the desired rate profile, dT/dt ($^{\circ}K/sec$), is given at any temperature by the following equation:

$$Q = MC_p * dT/dt$$

The solution to equation 1 is used to determine the current value, I , which will result in the desired Q under the current temperature conditions. This process is repeated periodically during temperature transitions.

Controlling overshoot and undershoot

There is a practical limit to the ramp rates and the resulting cycle times that can be achieved. The sample has a time constant with respect to the block temperature that is a function of the sample tube and tube geometry which, because the tube is an industry

standard, cannot be reduced. This means that even if the sample tube wall temperature is changed as a step function e.g. by immersion in a water bath, the sample will have a finite ramp time as the sample temperature exponentially approaches the set point. This can be compensated for by dynamically causing the block to overshoot the programmed temperature in a controlled manner. This means that the block temperature is driven beyond the set point and back again as a means of minimizing the time taken for the sample to reach the set point. As the possible ramp-rates increase, the overshoot required to minimize the time for the sample to reach the set point gets larger and a practical limit is soon reached. This occurs because although the average sample temperature does not overshoot the set point, the boundary liquid layer in the tube does overshoot to some extent. When cooling to the priming temperature, too great an overshoot can result in non-specific priming. Therefore the best advantage is to be gained in a system which utilizes this maximum ramp rate combined with optimized overshoots that are symmetrical on both up and down ramps.

Figure 8 is a chart for predicting and compensating for temperature overshoots and undershoots. In order to drive the block temperature beyond the set point and back again in a controlled fashion the system first measures the block temperature, $T_{b_{n+1}}$ and then solves the following equations:

$$T_{s_{n+1}} = T_{s_n} + (T_{b_{n+1}} - T_{s_n}) * 0.174 / RC$$

$$T_{sf_n} = (T_{b_n} - T_{s_n} - mRC)(1 - e^{-tm/RC}) + mtr_n + T_{s_n}$$

where T_b is the measured block temperature, T_s is the calculated sample temperature, T_{sf} is the final calculated sample temperature if the block is ramped down at time t_n , R is the thermal resistance between the sample block and the sample, C is the thermal capacitance of the sample, m is the slope of a line defined by the points T_b and T_{sf} and tr is the time for the sample block to return to the set point if the system caused it to ramp toward the set point at the same rate it is was ramping away.

If the resulting T_{sf_n} is within a particular error window around the set point then the system causes the sample block to ramp back to the set point at the same rate it was

ramping away. If the resulting Tsf_n is outside the particular error window then the system causes the sample block to continue to ramp away from the set point at the same rate. While ramping back toward the set point the same proportional integral derivative (PID) control loop described above is applied.

Determining Sample Temperature

The temperature of a sample in a sample vial is determined by using the model illustrated in Figure 13 where:

TBlk is the measured baseplate temperature;

TSmp is the calculated sample temperature;

TPlastic is the calculated plastic temperature;

TCvr is the measured cover temperature;

R1 is the thermal resistance of the plastic vial between the block and sample mixture;

C1 is the thermal capacitance of the sample mixture;

R2 and R3 represent the thermal resistance of air in parallel with the plastic vial between the sample mixture and the cover; and

C2 is the thermal capacitance of the plastic vial between the sample mixture and the cover.

The model above is solved for TSmp(t) and TPlastic(t) given that: TBlk = mt + TBlk0, TCvr = K and initial conditions are non-zero. Taking initial conditions and the slope of TBlk to be the only variables, as illustrated in Figure 14, the equations are refactored giving equations for TSmp and TPlastic.

Given the following relationships:

$$g1 = 1/R1;$$

$$g2 = 1/R2;$$

$$g3 = 1/R3;$$

$$a = (g1 + g2)/C1;$$

$$b = g2 / C1;$$

$$f = g2 / C2;$$

$$g = (g_2 + g_3) / C_2;$$

$$\alpha = -(-g/2 - a/2 - (\sqrt{g^2 - 2ga + a^2 + 4fb})/2); \text{ and}$$

$$\beta = -(-g/2 - a/2 + (\sqrt{g^2 - 2ga + a^2 + 4fb})/2),$$

the coefficients for the sample temperature equation become:

$$\text{coef1} = (g_3/C_2) * (-b/(\beta * (\alpha - \beta)) * \exp(-\beta T) + b/(\alpha * \beta) + (b/(\alpha * (\alpha - \beta))) * \exp(-\alpha T))$$

$$\text{coef2} = (b/(\alpha - \beta)) * \exp(-\beta T) - (b/(\alpha - \beta)) * \exp(-\alpha T)$$

$$\text{coef3} = (g_1/C_1) * (g/(\alpha * \beta) + (-\alpha + g) * \exp(-\alpha T)/(\alpha * (\alpha - \beta)) + (\beta - g) * \exp(-\beta T)/(\beta * (\alpha - \beta)))$$

$$\text{coef4} = (g_1/C_1) * ((g - \beta) * \exp(-\beta T)/(\beta^2 * (\alpha - \beta)) - g/(\beta * \alpha^2) + (1 + T * g)/(\alpha * \beta) + (-g + \alpha) * \exp(-\alpha T)/(\alpha^2 * (\alpha - \beta)) - g/(\alpha * \beta^2))$$

$$\text{coef5} = (-g + \alpha) * \exp(-\alpha T)/(\alpha - \beta) + (g - \beta) * \exp(-\beta T)/(\alpha - \beta)$$

and the coefficients for the plastic vial temperature equation become:

$$\text{coef6} = (g_3/C_2) * ((\beta - a) * \exp(-\beta T)/(\beta * (\alpha - \beta)) + a/(\alpha * \beta) + (-\alpha + a) * \exp(-\alpha T)/(\alpha * (\alpha - \beta)))$$

$$\text{coef7} = (-\beta + a) * \exp(-\beta T)/(\alpha - \beta) + (\alpha - a) * \exp(-\alpha T)/(\alpha - \beta)$$

$$\text{coef8} = (g_1/C_1) * (f * \exp(-\beta T)/(\beta^2 * (\alpha - \beta)) - f/(\beta * \alpha^2) - f * \exp(-\alpha T)/(\alpha^2 * (\alpha - \beta)) + T * f/(\alpha * \beta) - f/(\alpha * \beta^2))$$

$$\text{coef9} = (g_1/C_1) * (-f * \exp(-\beta T)/(\beta * (\alpha - \beta)) + f/(\alpha * \beta) + f * \exp(-\alpha T)/(\alpha * (\alpha - \beta)))$$

$$\text{coef10} = f * \exp(-\beta T)/(\alpha - \beta) - f * \exp(-\alpha T)/(\alpha - \beta)$$

and

$$\text{slope} = (T_{Blk} - T_{Blk0})/T \text{ where } T \text{ is the sampling period (0.174sec)}$$

Utilizing the model in Figure 13 then,

$$T_{Smp} = \text{coef1} * T_{Cvr0} + \text{coef2} * T_{Plastic0} + \text{coef3} * T_{Blk0} + \text{coef4} * \text{slope} + \text{coef5} * T_{Smp0}$$

$$T_{Plastic} = coef6 * TC_{vr0} + coef7 * T_{Plastic0} + coef8 * slope + coef9 * T_{Blk0} + coef10 * T_{Smp0}$$

The coefficients are recalculated at the beginning of each PCR protocol to account for the currently selected sample volume. T_{Smp} and $T_{Plastic}$ are recalculated for every iteration of the control task.

To determine the sample block set point, T_{BlkSP} , during a constant temperature cycle, T_{blk} is determined using the equation for T_{Smp} .

$$T_{blk0} = (T_{smp} - coef1 * TC_{vr0} - coef2 * T_{Plastic0} - coef4 * slope - coef5 * T_{Smp0}) / coef3$$

When maintaining a constant temperature the slope = 0 and $T_{smp} = T_{smp0} = T_{SmpSP}$ (sample temperature set point) and:

$$T_{BlkSP} = (T_{SmpSP} - coef1 * TC_{vr} - coef2 * T_{Plastic} - coef5 * T_{SmpSP}) / coef3$$

The equation for T_{BlkSP} is solved on every pass of the control loop to update the sample block set point to account for changes in temperature of the plastic and cover.

Calibration Diagnostics:

The control software includes calibration diagnostics which permit variation in the performance of thermoelectric coolers from instrument to instrument to be compensated for so that all instruments perform identically. The sample block, thermal electric devices and heatsink are assembled together and clamped using the clamping mechanism described above. The assembly is then ramped through a series of known temperature profiles during which its actual performance is compared to the specified performance. Adjustments are made to the power supplied to the thermal electric devices and the process is repeated until actual performance matches the specification. The thermal characteristics obtained during this characterization process are then stored in a

memory device residing on the assembly. This allows the block assembly to be moved from instrument to instrument and still perform within specifications.

AC Resistance Measurement:

The typical failure mode for the thermal electric devices is an increase in resistance caused by a fatigue failure in a solder joint. This results in an increase in the temperature of that joint which stresses the joint further, rapidly leading to catastrophic failure. It has been determined empirically that devices that exhibit an increase in AC resistance of approximately 5% after about 20,000 to 50,000 temperature cycles will shortly fail. The AC resistance of the thermal electric devices are monitored by the instrument to detect imminent failures before the device in question causes a thermal uniformity problem.

This embodiment automates the actual measurement using a feedback control system and eliminates the need to remove the thermal electric device from the unit. The control system compensates for the temperature difference between the two surfaces of the thermal electric device caused by the heat sink attached to one side and the sample block attached to the other. The control system causes the thermal electric device to equalize its two surface temperatures and then the AC resistance measurement is made. The micro-controller performs a polynomial calculation at the referenced time of the AC measurement to compensate for ambient temperature error.

Figure 9 shows the sample block 36, a layer of thermal electric device 60 and heatsink 34 interfaced with the system microcontroller 62 and bipolar power amplifier 64. The temperature sensor already present in the heatsink 38 and an additional temperature sensor attached to the sample block 36 with a clip (not shown) formed of music wire are utilized to determine the temperature differential of the surfaces of the thermal electric device.

The bipolar power amplifier supplies current in two directions to the device. Current in one direction heats the sample block and current in the other direction cools the sample block. The bipolar power amplifier also has signal conditioning capability to measure the AC voltage and AC current supplied to the thermal electric device. A band

pass filter 68 is incorporated into the signal conditioning to separate an AC measurement signal from the steady state signal that produces a null condition for the temperature difference across the thermal electric device.

The micro-controller incorporates the necessary capability to process the measurement information and perform the feedback in real time. It also stores the time history of the AC resistance and the number of temperature cycles of the thermal electric device and displays the information to the operator on the display 70. The AC measurement is normally done during initial turn on. However, it can be activated when self diagnostics are invoked by the operator using the keypad 72. An analog to digital and digital to analog converter along with signal conditioning for the temperature sensors and AC resistance measurement is also integrated into the micro-controller in order for it to perform its digital signal processing.

Sealing the Thermal Electric Device Area from the Environment.

The thermal electric devices are protected from moisture in the environment by seals and the chamber is kept dry with the use of a drying agent such as silica gel. The seal connects from the silver electroform to the surrounding support and as such adds to the edge losses from the block. These losses are minimized by the use of a low thermal conductivity pressure seal 98 and by the use of the perimeter heater described above. The seal 98 has a cross-section generally in the shape of a parallelogram with several tabs 100 spaced about the lower surface of seal 98 for holding seal 98 to the edge of the sample block as shown in Figure 15.

The seal 98 is installed by first applying RTV rubber (not shown) around the perimeter 110 of the upper portion of the sample block. The seal 98 is then placed on the RTV rubber. More RTV rubber is applied to the perimeter 120 of the seal and then a cover (not shown) is installed which contacts the RTV rubber - seal combination. The cover has a skirt which also contacts a gasket (not shown) on the printed circuit board to effect a more effective seal.

CLAIMS

1. An apparatus for performing the polymerase chain reaction in a plurality of liquid reaction mixtures; said apparatus including a plurality of vials containing such liquid reaction mixtures, said vials having an upper portion and a lower portion; said apparatus comprising:

an assembly for cycling said vials through a series of temperature excursions;
a cover for applying a seating force directly to said vials and for applying a constant temperature to the upper portion of said vials; and
a computing apparatus for controlling said temperature excursions of said assembly and said constant temperature of said cover.

2. The apparatus of claim 1 wherein said assembly comprises:

a sample block for receiving said vials;
a plurality of thermal electric devices;
a heat sink;
a clamping mechanism positioned so as to clamp said Peltier thermal electric devices between said sample block and said heatsink;
a heater positioned loosely around the perimeter of said sample block; and
a pin having a first end and a second end, said first end in close contact with said sample block and said second end in close contact with said heatsink so as to provide a thermal path between said sample block and said heatsink.

3. The apparatus of claim 2 wherein said sample block comprises:

a plurality of sample wells, for receiving sample vials, each well having a top and bottom;
an upper support plate connecting the tops of said sample wells.

4. The apparatus of claim 3 wherein said upper support plate and said sample wells are electroformed as a single piece.

5. The apparatus of claim 3 wherein said sample block is comprised of silver.
6. The apparatus of claim 3 wherein said sample wells are arranged in an 8 x 12 array.
7. The apparatus of claim 3 wherein sample block is rectangular.
8. The apparatus of claim 2 wherein said plurality of Peltier thermoelectric devices are matched to provide a temperature within 0.2 C for a given input current.
9. The apparatus of claim 2 wherein said Peltier thermoelectric devices comprise:
a first ceramic layer having bonded copper traces;
a second ceramic layer having bonded copper traces, said second ceramic layer comprising a plurality of ceramic elements; and
a plurality of bismuth telluride pellets positioned between said first ceramic layer and said second ceramic layer and soldered to said bonded copper traces on said first and second ceramic layers.
10. The apparatus of claim 9 wherein the ceramic of said first and second layer is alumina.
11. The apparatus of claim 9 wherein the ceramic layers have a thickness of 0.508mm.
12. The apparatus of claim 9 wherein said bismuth telluride pellets are soldered using high temperature solder.
13. The apparatus of claim 9 wherein the resistivity of the devices is determined from the equation:

$$R = nr(h/A)$$

where R is the resistivity of the device, n is the number of pellets, r is the resistivity of the bismuth telluride being used, h is the height of the pellet and A is the cross sectional area of the bismuth telluride.

14. The apparatus of claim 2 wherein said heatsink comprises:
 - a plate having a top side and a bottom side;
 - a plurality of fins extending perpendicularly from said bottom side;
 - a trench extending around the perimeter of said top side to impede heat loss from said perimeter;
 - a fan placed in close proximity to said fins to control air flow through said fins;
 - and
 - a recess within said plate for receiving a temperature sensor.
15. The assembly of claim 2 wherein said clamping mechanism comprises:
 - a spine and said spine having a plurality of openings in said spine for receiving fasteners;
 - a plurality of fingers extending laterally from said spine.
16. The apparatus mechanism of claim 15 wherein said spine is rectangular in shape.
17. The apparatus mechanism of claim 15 wherein said fingers are rectangular in shape.
18. The apparatus of claim 15 wherein said fingers have a top and a bottom and are tapered so as to have less width at said top than at said bottom.
19. The apparatus of claim 15 wherein said fingers have a first end protruding laterally from said spine and a protrusion extending downward from said first end.

20. The apparatus of claim 15 wherein said fingers have a beveled front edge.
21. The apparatus of claim 15 wherein each of said openings are located in close proximity to a corresponding finger.
22. The apparatus of claim 2 wherein said heater comprises an electrically resistive path embedded in a frame shaped film carrier.
23. The apparatus of claim 22 wherein said electrically resistive path comprises a first set of sections located on opposite sides of said frame shaped carrier having a first power density and a second set of sections located on opposite sides of said frame shaped having a second power density.
24. The apparatus of claim 2 further comprising an associated memory device capable of storing data related to said assembly.
25. The apparatus of Claim 1 wherein said cover comprises:
 - a platen, vertically and horizontally displaceable in relationship to said vials,said platen including:
 - an array of openings corresponding to locations of said vials, said openings having a perimeter corresponding to a perimeter of said vials;
 - a skirt extending downward around the perimeter of said platen, said skirt having dimensions corresponding to the perimeter of a standard microtiter tray, said skirt constructed to engage said perimeter of said tray during vertical displacement of said platen, causing said openings in said platen to engage said perimeter of said vials, applying a seating force on said vials for maintaining a snug fit between walls of said sample vials and said assembly for receiving said sample vials

means for forcibly lowering said platen to maintain said seating force; and

heating means positioned in close contact with said platen to maintain said platen at a constant temperature.

26. The apparatus of claim 1 wherein said assembly comprises of at least one device for changing the temperature of said apparatus further comprising a system for measuring the AC resistance of said thermal electric device.

27. The apparatus of claim 26 wherein at least one device has a first heating and cooling surface and a second heating and cooling surface, said system comprising:

- a first temperature sensor positioned so as to be in thermal communication with said first heating and cooling surface;

- a second temperature sensor positioned so as to be in thermal communication with said second heating and cooling surface;

- a bi-polar amplifier circuit for providing power to said thermal electric device;

- a circuit for sensing AC voltage across said thermal electric device and producing a DC voltage representing said AC voltage;

- a circuit for sensing AC current through said thermal electric device and producing a DC voltage representing said AC current;

- a microcontroller programmed to receive said signals from said first and second temperature sensors;

- said microcontroller further programmed to cause said bi-polar amplifier to provide power to said thermal electric device so that said first and second temperature sensor signals indicate equal temperatures;

- said microcontroller further programmed to cause an AC voltage to be superimposed on said bi-polar amplifier power;

- said microcontroller further programmed to receive said voltages produced by said circuit for sensing AC voltage and from said circuit for sensing AC current;

said microcontroller further programmed to calculate the AC resistance of said thermal electric device from said voltages;

said microcontroller further programmed to compensate for ambient temperature error by performing a polynomial calculation; and

said microcontroller further programmed to store said compensated AC resistance measurement.

28. A method for measuring the AC resistance of a thermal electric device having a first heating and cooling surface and a second heating and cooling surface, said method comprising:

measuring the temperature of said first heating and cooling surface;

measuring the temperature of said second heating and cooling surface;

applying power to said Peltier thermal electric device to cause said first heating and cooling surface and said second heating and cooling surface to attain the same temperature;

applying an AC voltage across said thermal electric device;

measuring said AC voltage across said thermal electric device;

measuring AC current through said thermal electric device;

calculating the AC resistance of said thermal electric device from said measured AC voltage and said measured AC current.

29. The method of claim 28, further comprising:

performing a calculation for compensating for ambient temperature error to calculate a compensation AC resistance measurement; and

storing said compensated AC resistance measurement.

30. A method for achieving linear temperature transitions utilizing a thermal electric device having at least a first heating and cooling surface and a second heating and cooling surface and being operated in a manner causing said first surface to be higher in

temperature and said second surface to be lower in temperature relative to each other, said method comprising the following steps:

- determining a desired heat flow from said lower temperature surface;
- determining electrical resistance of said thermal electric device as a function of temperature;
- determining the Seebeck coefficient of said thermal electric device as a function of temperature;
- determining the conduction of said thermal electric device as a function of temperature;
- measuring the temperature of said lower temperature surface;
- measuring the temperature of said higher temperature surface;
- calculating the average temperature of said lower temperature surface and said higher temperature surface; and
- calculating the current required to achieve said desired heat flow as a function of said electrical resistance of said thermal electric device as a function of temperature, said Seebeck coefficient of said thermal electric device as a function of temperature, said conductance of said thermal electric device as a function of temperature, said temperature of said lower temperature surface, said temperature of said higher temperature surface, and said average of said lower temperature surface and said higher temperature surface.

31. A method for determining the temperature of a mixture in a sample vial, said vial having an upper portion and a lower portion and contained in an apparatus comprising:
- an assembly for cycling said vials through a series of temperature excursions, said assembly further comprising a sample block for receiving said vials;
 - a cover for applying a seating force on said vials and for applying a constant temperature to the upper portion of said vials; and
 - a computing apparatus for controlling said temperature excursions of said assembly and said constant temperature of said cover.

said method comprising:

- measuring the temperature of said sample block;
- measuring the temperature applied by said cover;
- determining the thermal resistance of said vial between said sample block and said mixture;
- determining the thermal resistance of air in parallel with said vial between said mixture and said cover;
- determining the thermal capacitance of said mixture;
- determining the thermal capacitance of said vial between said mixture and said cover; and
- calculating the temperature of said mixture as a function of said temperature of said sample block, said temperature applied by said cover, said thermal resistance of said vial between said sample block and said mixture, said thermal resistance of air in parallel with said vial between said mixture and said cover, said thermal capacitance of said mixture and said thermal capacitance of said vial between said mixture and said cover.

32. A method of calibrating an assembly for cycling samples through a series of temperature excursions comprising a sample block for receiving vials, a plurality of thermal electric devices, a heat sink, a clamping mechanism positioned so as to clamp said Peltier thermal electric devices between said sample block and said heatsink, and a memory device capable of storing data related to said assembly, said method comprising:

- applying power to said thermal electric devices, causing said assembly to cycle through a desired series of temperature excursions
 - measuring the actual temperature excursions
 - comparing said actual temperature excursions with said desired temperature excursions
 - adjusting said power applied to said thermal electric devices so that said actual temperature excursions match said desired temperature excursions
 - recording said adjusted power in said memory device for further utilization in obtaining said desired series of temperature excursions

33. An assembly for cycling vials of reaction mixtures through a series of temperature excursions comprising:

- a sample block for receiving vials of reaction mixtures;
- a plurality of thermal electric devices;
- a heat sink;
- a clamping mechanism positioned so as to clamp said thermal electric devices between said sample block and said heatsink;
- a heater positioned around the perimeter of said sample block; and
- a pin having a first end and a second end, said first end in close contact with said sample block and said second end in close contact with said heatsink so as to provide a thermal path between said sample block and said heatsink;
- a computing apparatus for controlling said temperature excursions of said assembly and said heater.

34. A sample block for holding sample vials comprising:

- a plurality of sample wells, for receiving sample vials, each well having a top and bottom;
- an upper support plate connecting the tops of said sample wells; and
- a bottom plate connecting the bottom of said sample wells

35. The sample block of claim 34 wherein said upper support plate and said sample wells are electroformed as a single piece.

36. The sample block of claim 34 wherein said sample block is comprised of silver.

37. The sample block of claim 34 wherein said sample wells are arranged in an 8 x 12 array.

38. The sample block of claim 34 wherein sample block is rectangular.

39. A heatsink assembly comprising:
- a plate having a top side and a bottom side;
 - a plurality of fins extending perpendicularly from said bottom side;
 - a trench extending around the perimeter of said top side to impede heat loss from said perimeter;
 - a fan placed in close proximity to said fins to control air flow through said fins;
- and
- a recess within said plate for receiving a temperature sensor.
40. An apparatus for measuring the AC resistance of a Peltier thermal electric device having a first heating and cooling surface and a second heating and cooling surface, said system comprising:
- a first temperature sensor positioned so as to be in thermal communication with said first heating and cooling surface;
 - a second temperature sensor positioned so as to be in thermal communication with said second heating and cooling surface;
 - a bi-polar amplifier circuit for providing power to said thermal electric device;
 - a circuit for sensing AC voltage across said thermal electric device and producing a DC voltage representing said AC voltage;
 - a circuit for sensing AC current through said thermal electric device and producing a DC voltage representing said AC current;
 - a microcontroller programmed to receive said signals from said first and second temperature sensors;
 - said microcontroller further programmed to cause said bi-polar amplifier to provide power to said thermal electric device so that said first and second temperature sensor signals are equal;
 - said microcontroller further programmed to cause an AC voltage to be superimposed on said bi-polar amplifier power;
 - said microcontroller further programmed to receive said voltages produced by said circuit for sensing AC voltage and from said circuit for sensing AC current;

said microcontroller further programmed to calculate the AC resistance of said thermal electric device from said voltages;

said microcontroller further programmed to compensate for ambient temperature error by performing a polynomial calculation; and

said microcontroller further programmed to store said compensated AC resistance measurement.

1/13

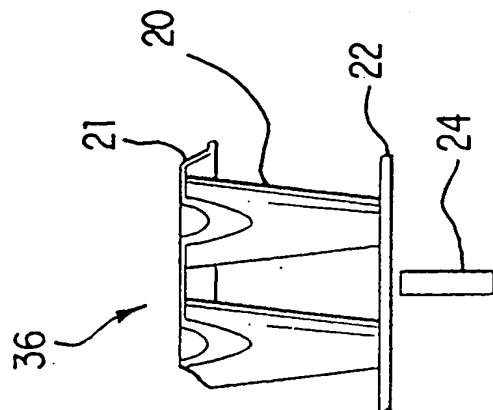


FIG. 1

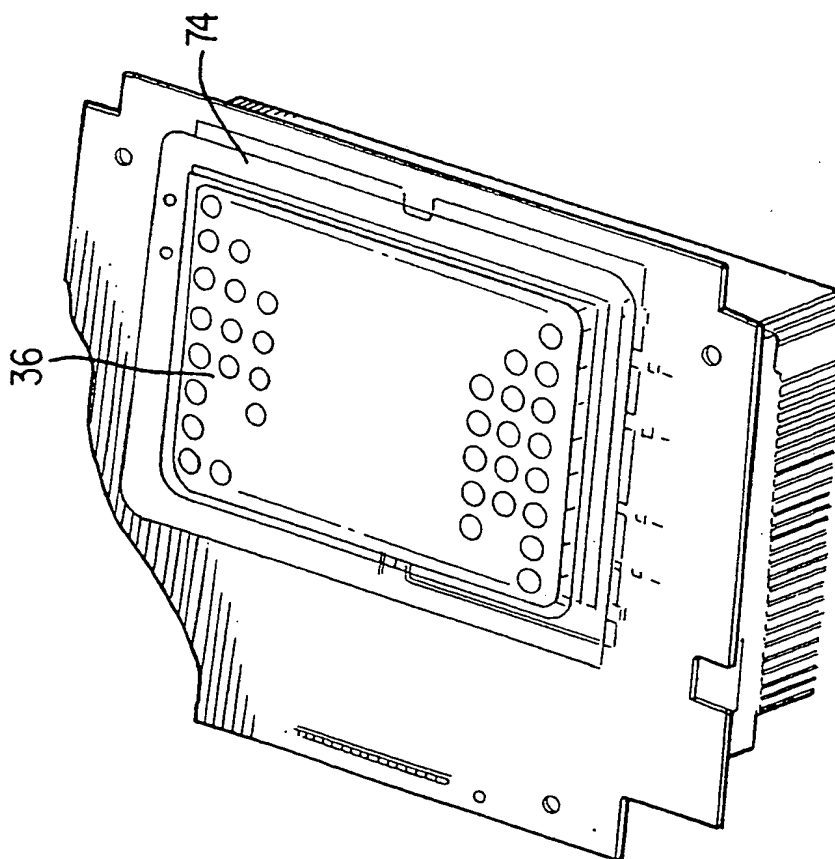


FIG. 10

2/13

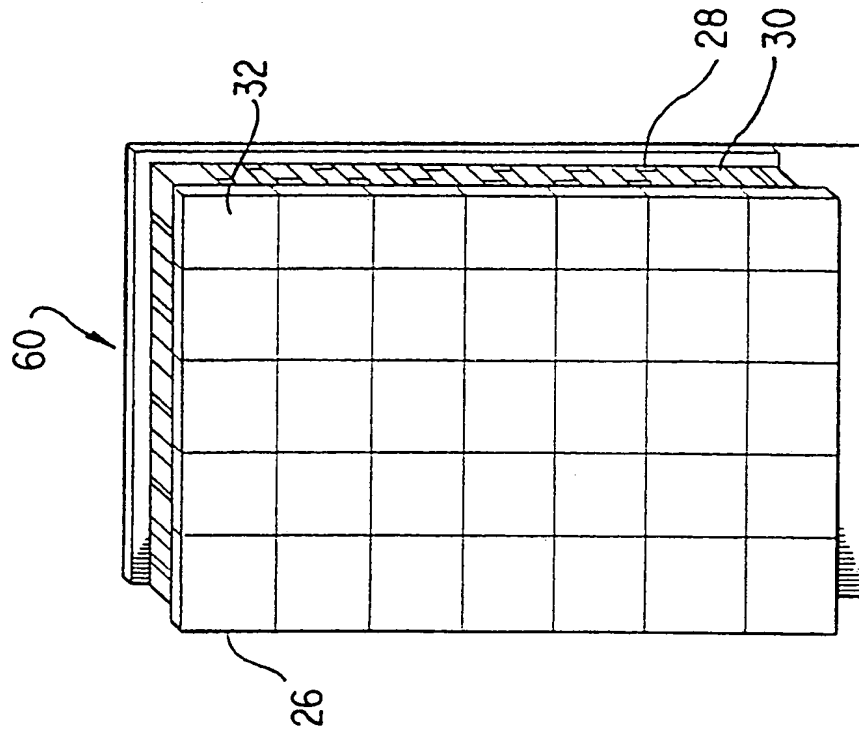


FIG. 2

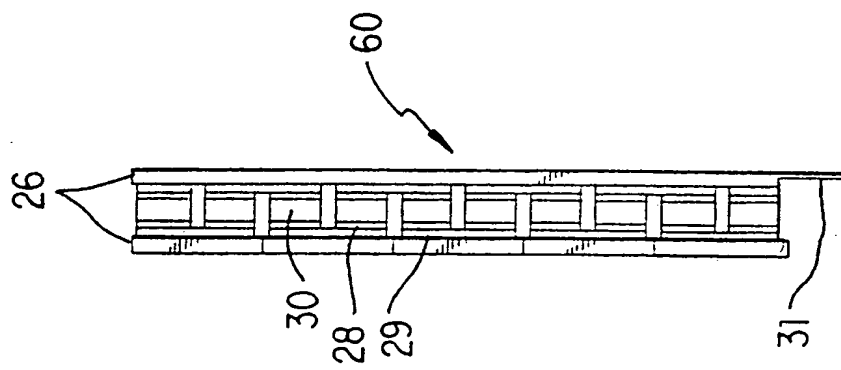


FIG. 2A

3/13

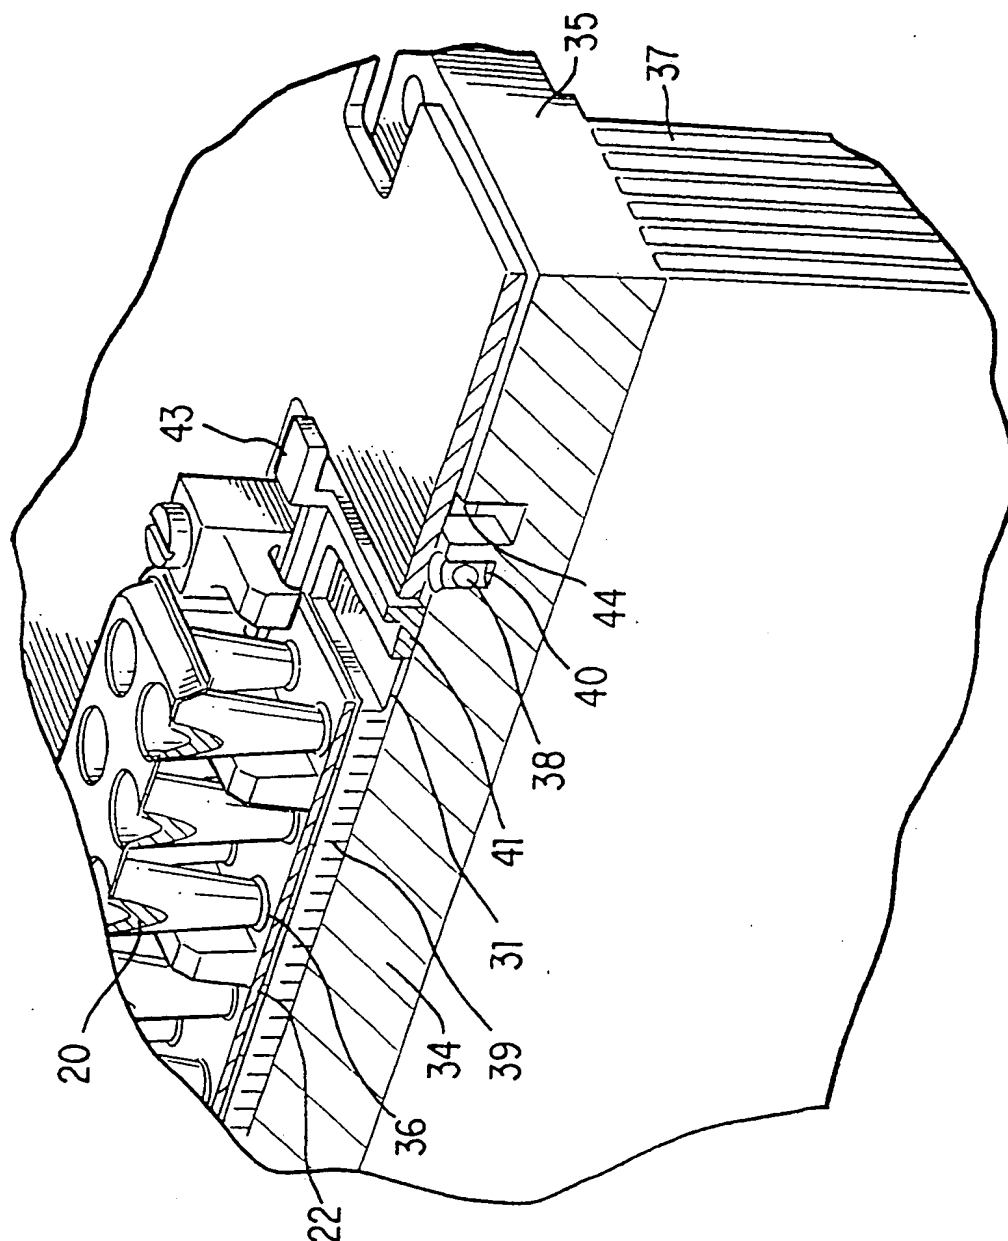


FIG. 3

5/13

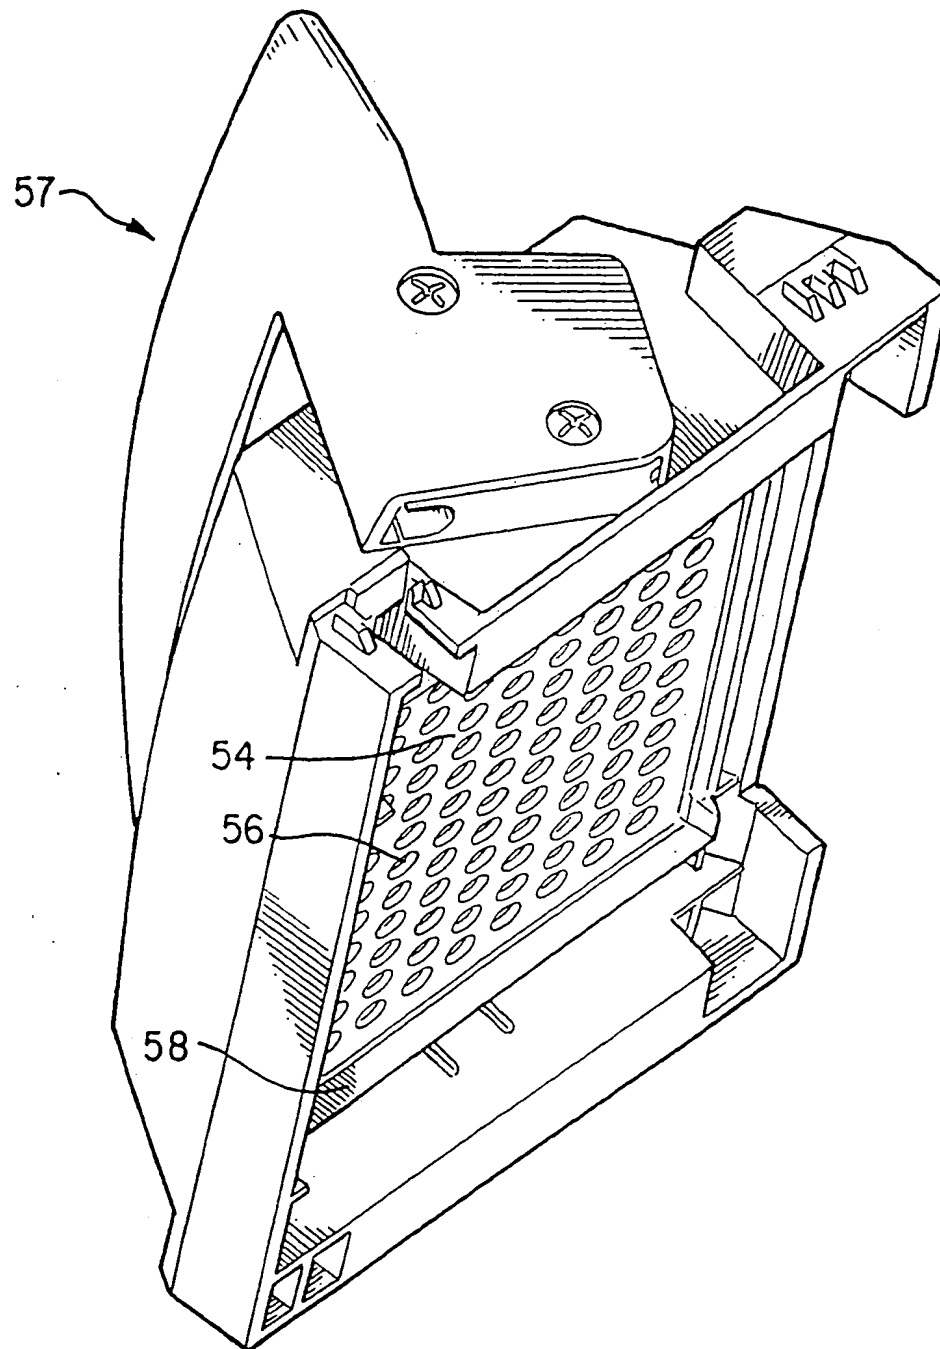


FIG. 5

6/13

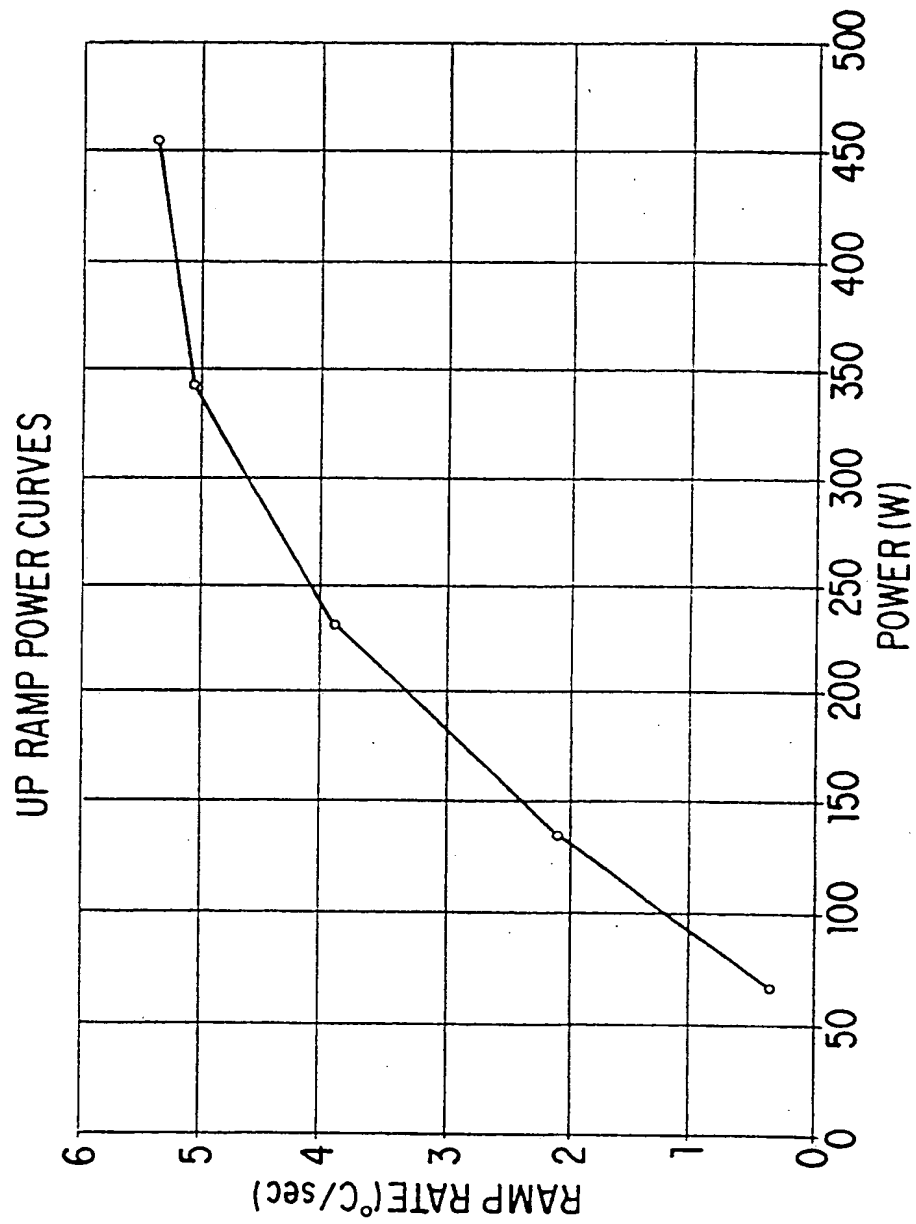


FIG. 6

7/13

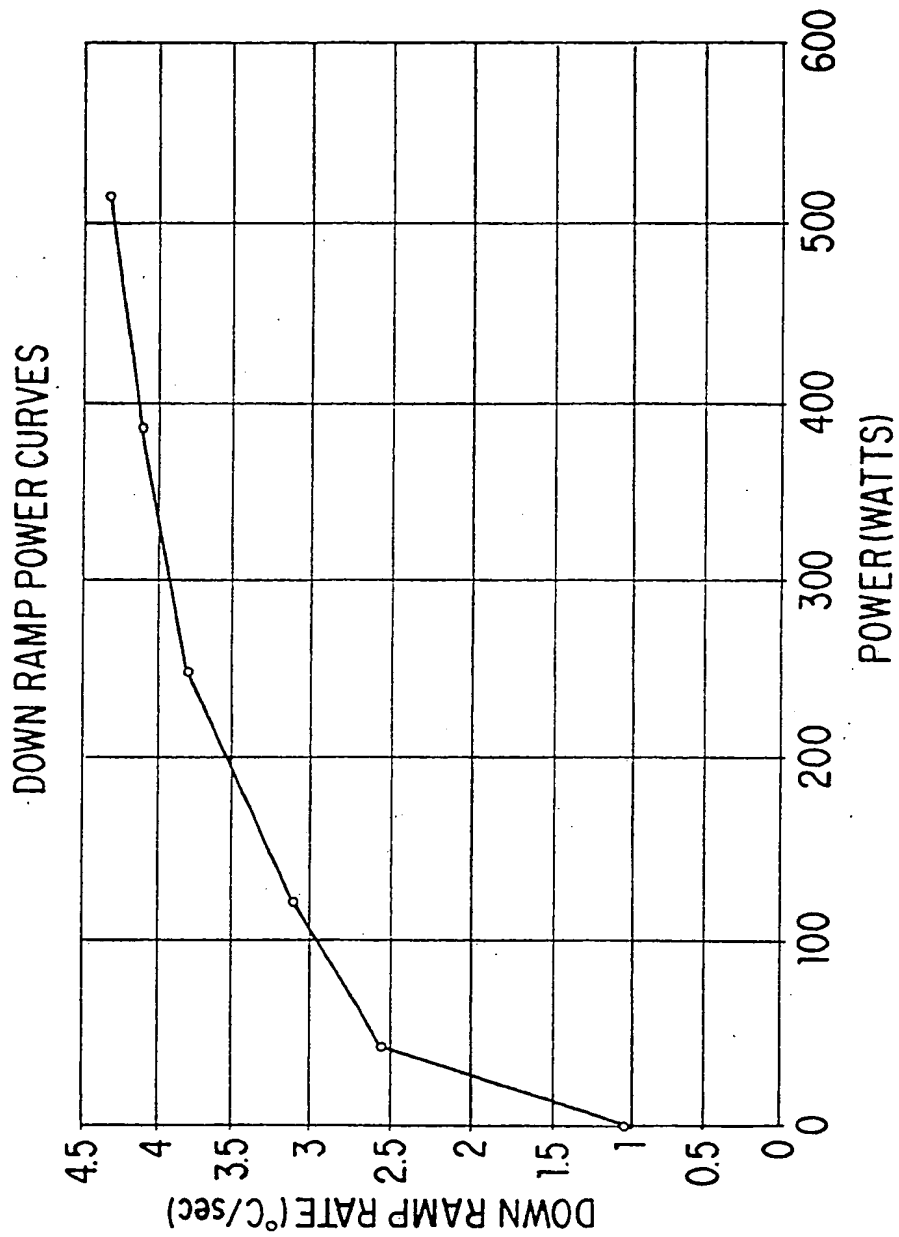


FIG. 7

8/13

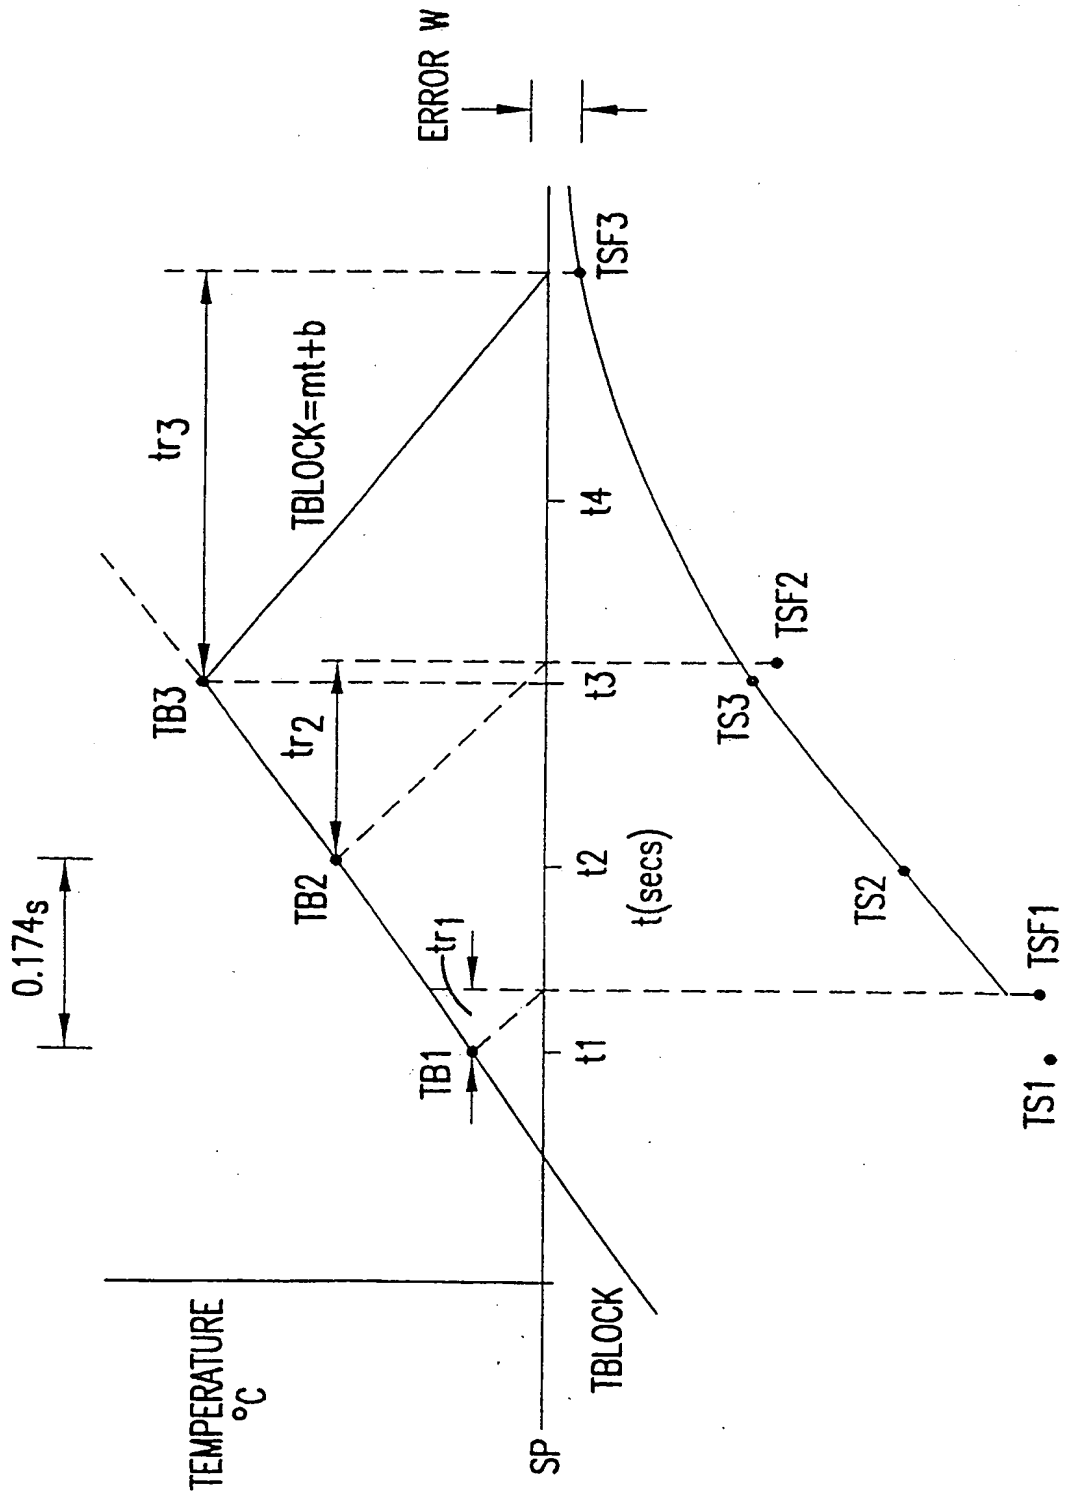


FIG.8

9/13

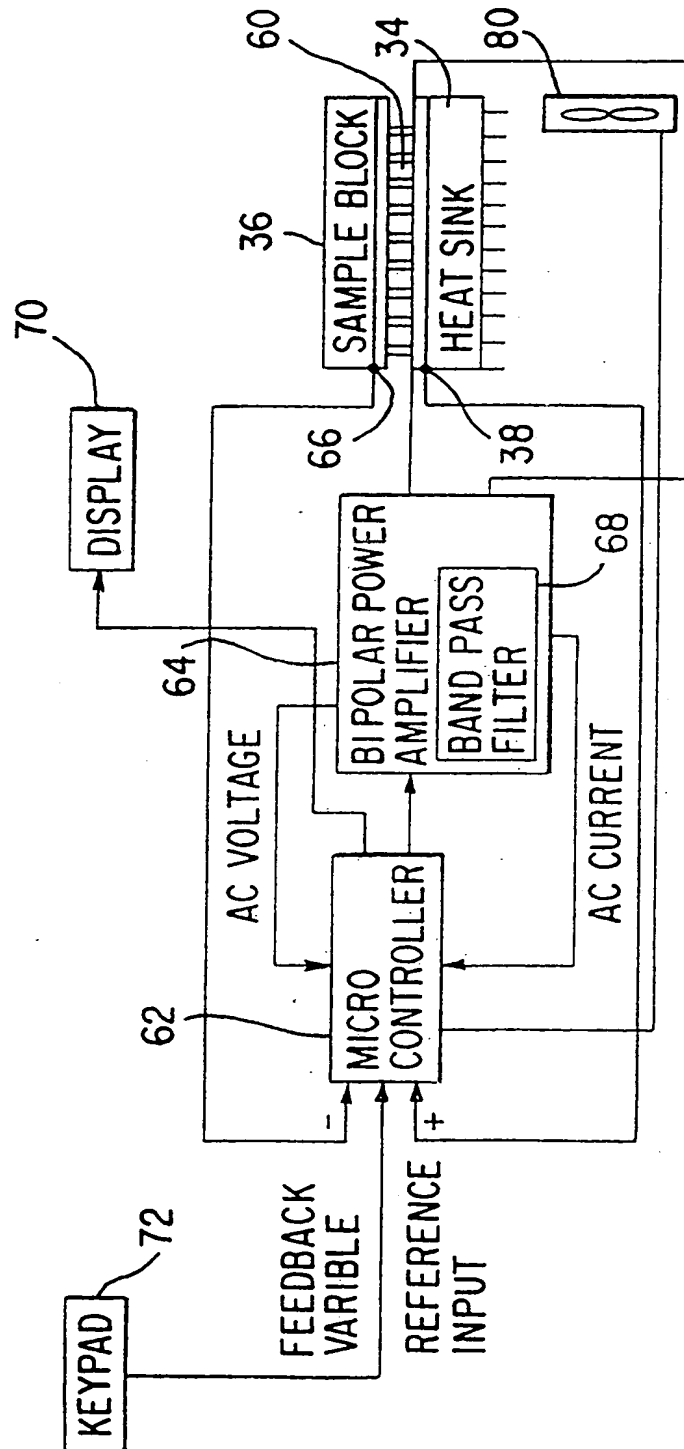


FIG. 9

10/13

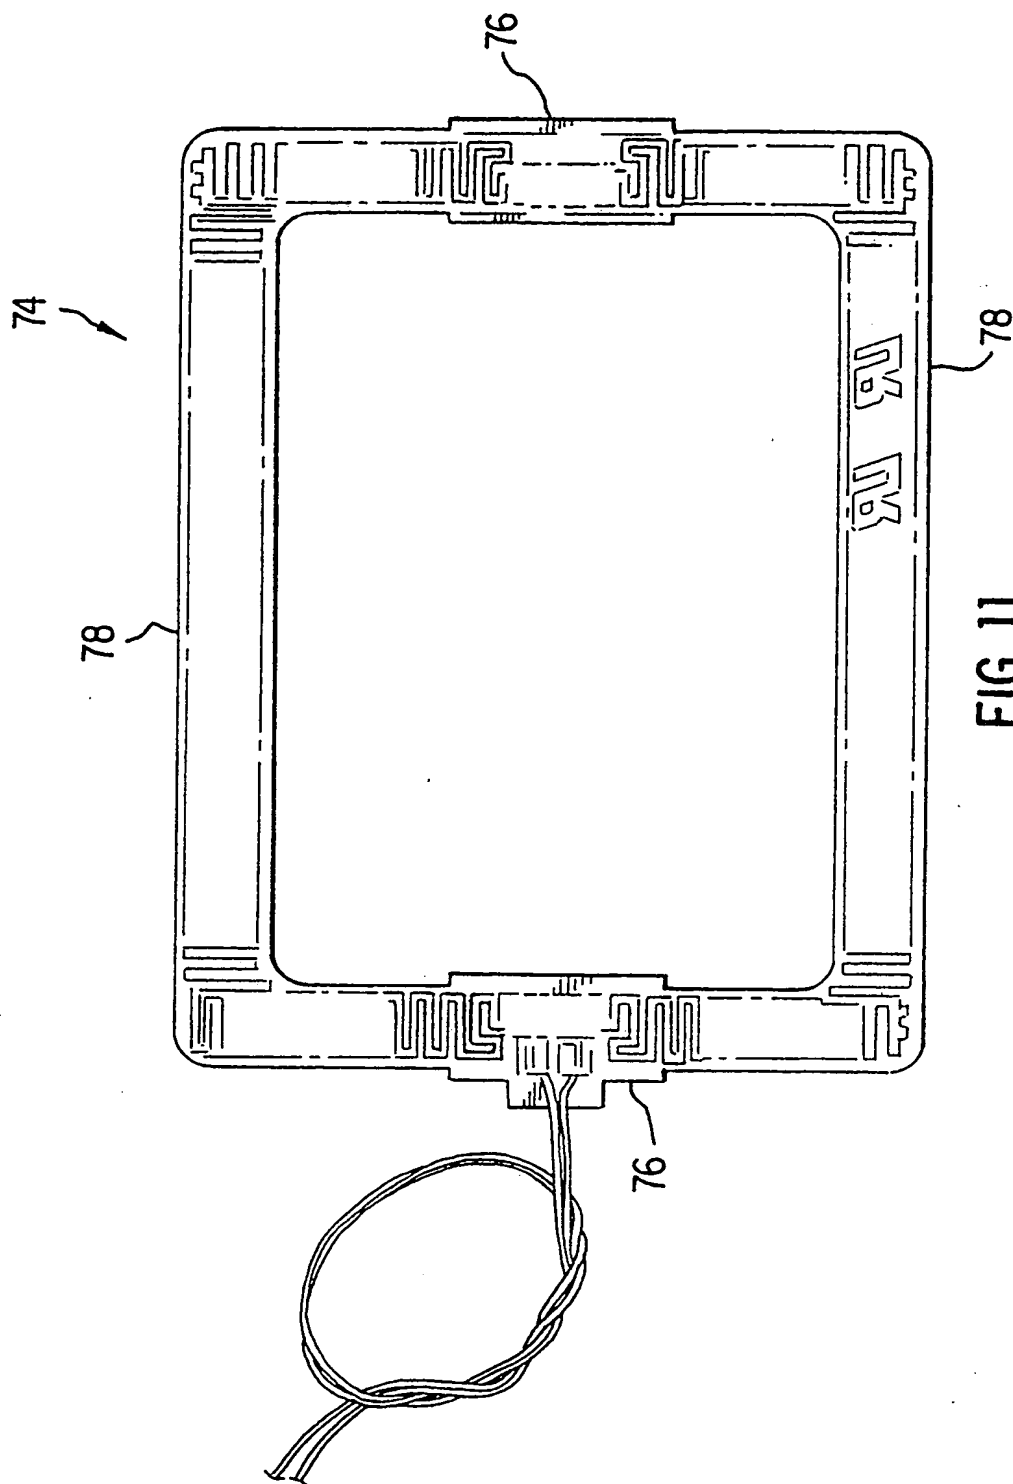


FIG. 11

11/13

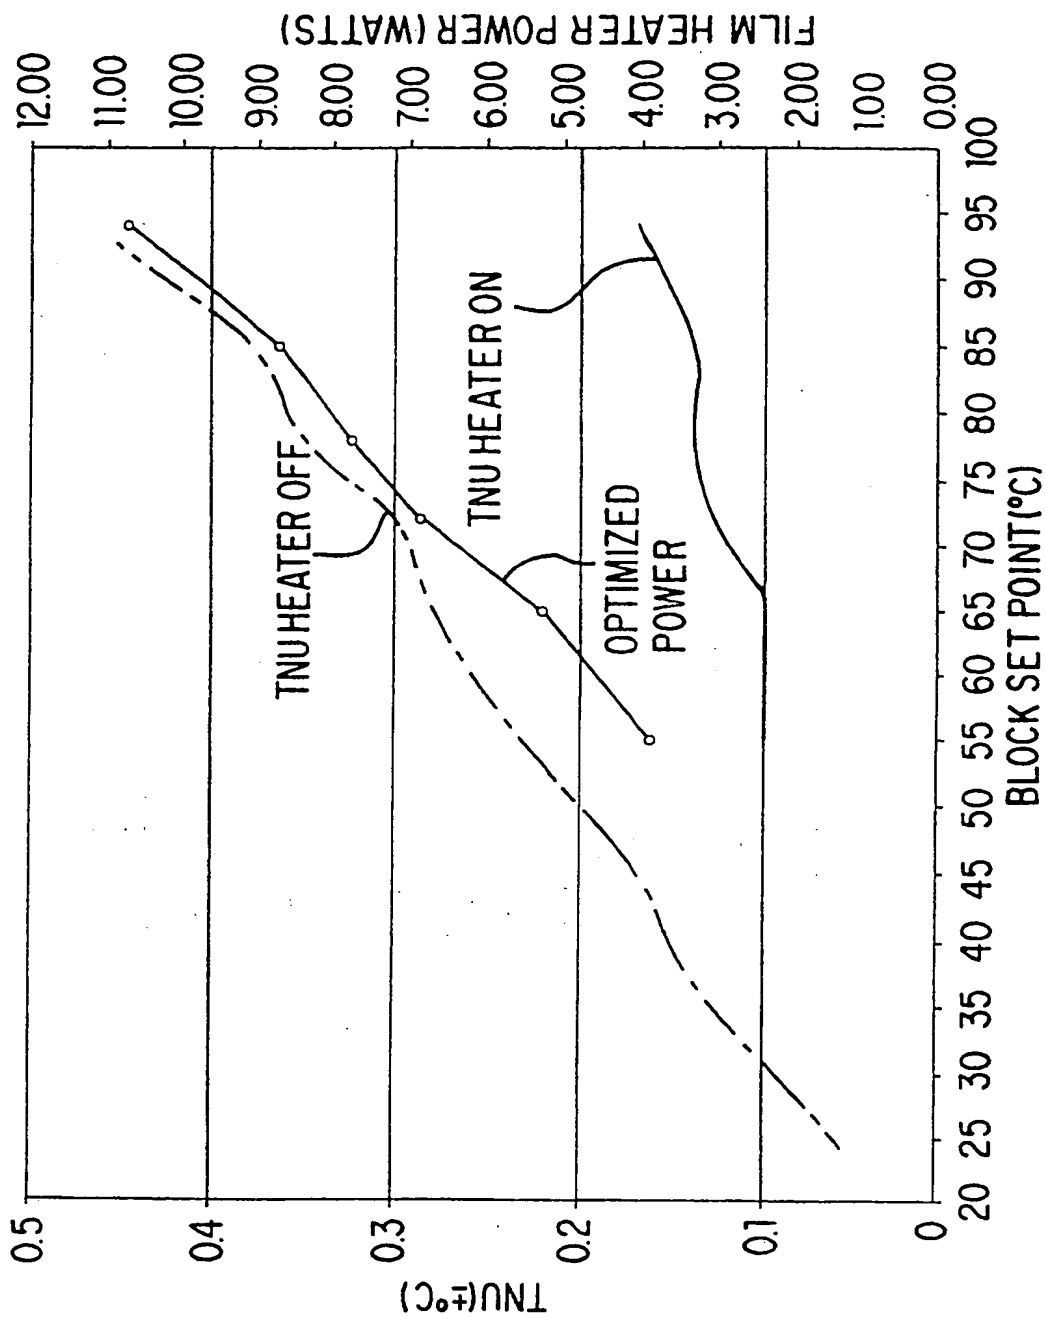


FIG.12

12/13

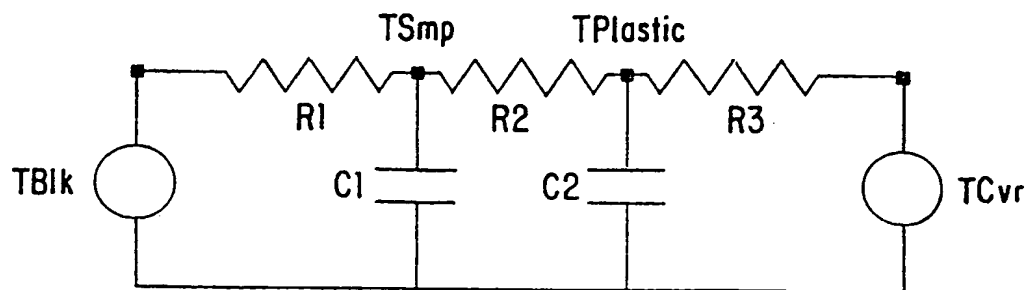


FIG.13

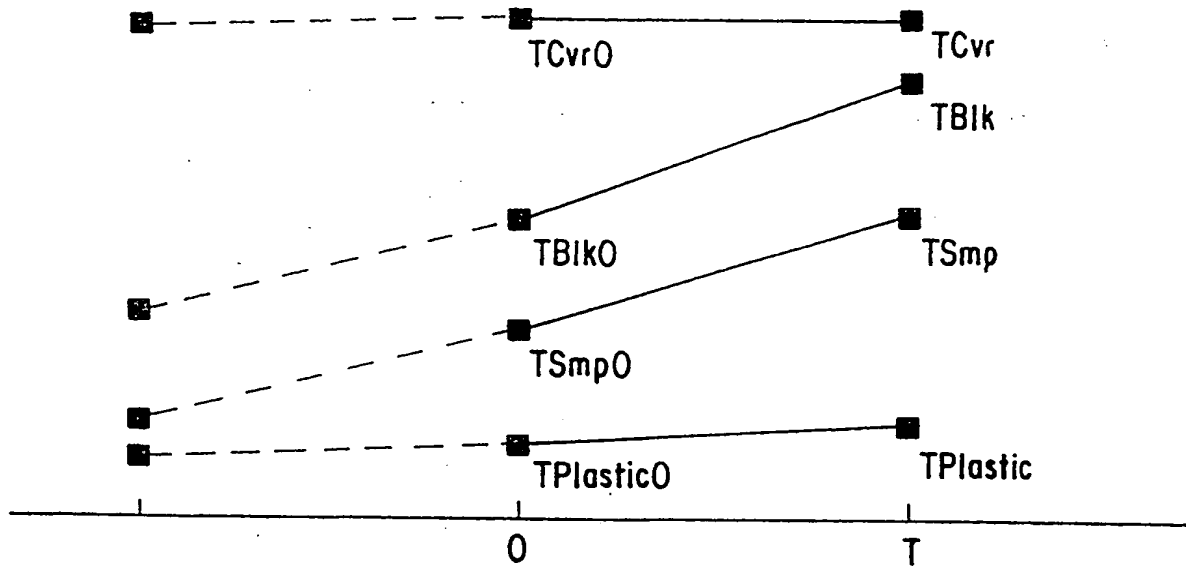


FIG.14

13/13

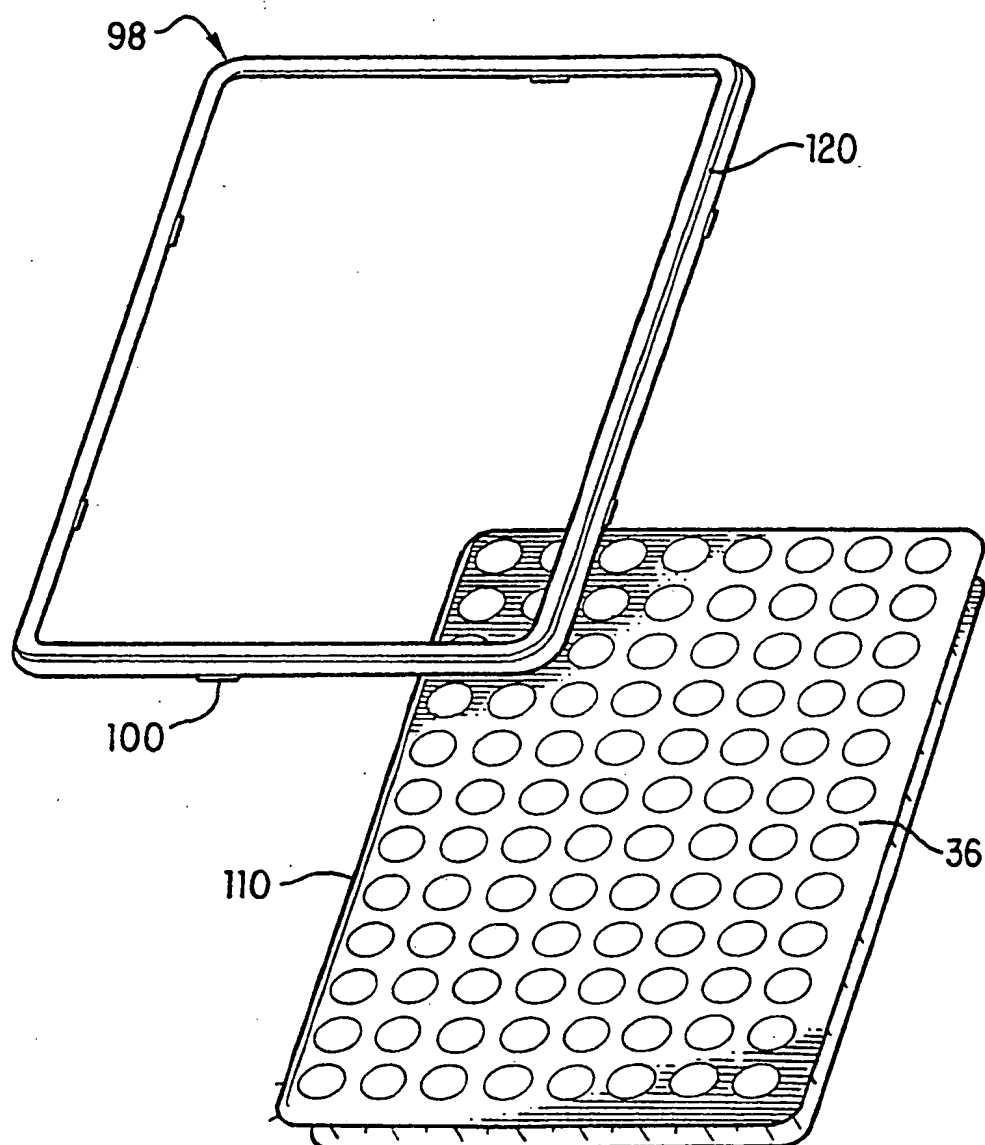


FIG. 15

INTERNATIONAL SEARCH REPORT

In tional Application No

PCT/US 98/06189

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 B01L7/00 C12Q1/68 H01L35/28 F25B21/02 G01R27/20

According to International Patent Classification(IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 B01L F25B H01L G01R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 488 769 A (PERKIN ELMER CETUS INSTR) 3 June 1992 cited in the application see page 7, line 19 - line 30 see page 8, line 19 - line 48	1
A	see page 8, line 49 - line 51	2
A	see page 9, line 48 - page 10, line 12	34-38
A	see page 15, line 21 - line 50; figures 2,6,8	14,39
A	see page 16, line 7 - line 39; figures 9,13	2,22
A	see page 20, line 34 - page 21, line 29 see page 22, line 41 - line 57; figures 1,19	31
A	see page 23, line 16 - line 39; figure 15 see page 23, line 40 - line 47; figures 15,19	25
A	see page 35, line 19 - page 36, line 9; claim 99 -/--	32



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

8 October 1998

Date of mailing of the international search report

28.10.98

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Hocquet, A

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/06189

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p style="text-align: center;">---</p> <p>EP 0 342 155 A (AGROGEN STIFTUNG ;SEYFFER & CO (CH); KNOPF ULRICH CHRISTIAN (CH)) 15 November 1989 see column 3, line 12 - line 21; figures 2,3 see column 6, line 38 - column 7, line 20; figures 2-7</p>	39
X	<p style="text-align: center;">---</p> <p>EP 0 642 831 A (HOFFMANN LA ROCHE) 15 March 1995</p>	1
A	see column 3, line 27 - column 5, line 7	2
A	see column 5, line 34 - column 6, line 16	
A	<p style="text-align: center;">---</p> <p>EP 0 236 069 A (CETUS CORP) 9 September 1987 see page 9, line 20 - page 10, line 10; figures 1,3</p>	9
Y	<p style="text-align: center;">---</p> <p>DE 40 37 955 A (SEIDL BERND) 6 June 1991 see column 1, line 3 - line 21; claims 1-7 see column 1, line 47 - column 2, line 18; figures</p>	34-38
A	<p style="text-align: center;">---</p> <p>WO 93 09486 A (HYBAID LTD) 13 May 1993</p>	3-6
Y	<p>see page 4, line 10 - line 17; claims 1,3,6 see page 7, line 1-5 see page 7, line 18 - line 35</p>	34-38
A	<p style="text-align: center;">---</p> <p>US 5 410 130 A (BRAUNSTEIN ZACHARY L) 25 April 1995 see column 4, line 7 - line 34; figure 2</p>	2,22,23
A	<p style="text-align: center;">---</p> <p>US 4 865 986 A (COY RICHARD A ET AL) 12 September 1989 see column 2, line 34 - line 58 see column 3, line 64 - column 4, line 5</p>	2
A	<p style="text-align: center;">---</p> <p>US 5 040 381 A (HAZEN WILLIAM A) 20 August 1991 see column 1, line 27 - line 40 see column 2, line 3 - line 67; figure 1</p>	9,10
P,X	<p style="text-align: center;">---</p> <p>WO 97 21089 A (PERKIN ELMER CORP) 12 June 1997 see page 8, line 10 - page 9, line 10; figures 1,2</p>	1,25
X	<p style="text-align: center;">---</p> <p>EP 0 642 828 A (HOFFMANN LA ROCHE) 15 March 1995 see column 7, line 12 - column 8, line 40; figures 7-12</p> <p style="text-align: center;">---</p> <p style="text-align: center;">-/--</p>	1,25

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 98/06189

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 640 828 A (HOFFMANN LA ROCHE) 1 March 1995 see column 7, line 23 - line 35; figures 14-17	1,25
Y	see column 15, line 1 - line 13 ---	25
Y	WO 95 27196 A (SANADI ASHOK R) 12 October 1995 see page 1, paragraph 2 see page 21, paragraph 2 - page 22, paragraph 1; figures 8,8A ---	1,25
A	US 5 248 934 A (ROVETI DENES K) 28 September 1993 see column 1, line 11 - line 17 see column 2, line 58 - line 68 see column 3, line 20 - line 23 ---	26-28,40
A	US 4 881 038 A (CHAMPLIN KEITH S) 14 November 1989 see column 2, line 5 - line 15 see column 3, line 65 - column 4, line 4 ---	28,40
A	US 5 441 576 A (BIERSCHENK JAMES L ET AL) 15 August 1995 see column 1, line 32 - line 59; figures see column 3, line 14 - line 47 ---	28,40
A	US 5 431 021 A (GWILLIAM SCOTT B ET AL) 11 July 1995 see column 3, line 37 - line 39 see column 9, line 14 - line 40 see column 10, line 2 - column 12, line 35; figures 6A,9 ---	30
A	US 5 385 022 A (KORNBLIT LEVY) 31 January 1995 see column 1, line 20 - line 46 see column 6, line 32 - line 48 ---	30
A	EP 0 362 173 A (AFFARSVERKET FFV) 4 April 1990 see column 1, line 47 - column 3, line 9 ---	31
A	US 5 600 575 A (ANTICOLE ROBERT B) 4 February 1997 see column 6, line 51 - column 7, line 58; figures 4,5 ---	31
A	US 4 639 883 A (MICHAELIS THEODORE D) 27 January 1987 see column 2, line 6 - line 16 see column 3, line 33 - column 4, line 23 ---	31
	-/--	

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 98/06189

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 5 237 821 A (OKUMURA TAKUJI ET AL) 24 August 1993 see column 1, line 21 - line 55; figure 1B -----</p>	32

INTERNATIONAL SEARCH REPORT

national application No.

PCT/US 98/ 06189

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

- | | |
|------------------------------|---------------|
| 1. CLAIMS: 01-24, 33-39 | 4. CLAIM : 30 |
| 2. CLAIM : 25 | 5. CLAIM : 31 |
| 3. CLAIMS: 26-27, 28, 29, 40 | 6. CLAIM : 32 |

FOR FURTHER INFORMATION PLEASE SEE FORM PCT/ISA/206 MAILED 17.07.98.

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.

2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.

3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

In International Application No

PCT/US 98/06189

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0488769 A	03-06-1992	AT 165621 T	15-05-1998
		AU 696482 B	10-09-1998
		AU 2493495 A	07-12-1995
		AU 662494 B	07-09-1995
		AU 8832791 A	04-06-1992
		CA 2056743 A	30-05-1992
		DE 69129325 D	04-06-1998
		DE 69129325 T	10-09-1998
		DE 812621 T	13-08-1998
		DE 810030 T	24-09-1998
		EP 0812621 A	17-12-1997
		EP 0810030 A	03-12-1997
		GR 92300125 T	16-03-1993
		IL 100209 A	15-03-1995
		IL 111091 A	31-12-1995
		IL 111092 A	18-06-1996
		JP 6233670 A	23-08-1994
		NZ 240800 A	26-10-1995
		NZ 270628 A	26-10-1995
		NZ 270629 A	26-10-1995
		US 5282543 A	01-02-1994
		US 5710381 A	20-01-1998
		US 5602756 A	11-02-1997
		US 5475610 A	12-12-1995
EP 0342155 A	15-11-1989	CH 679282 A	31-01-1992
		CH 676332 A	15-01-1991
		CA 1317646 A	11-05-1993
		US 5061630 A	29-10-1991
EP 0642831 A	15-03-1995	CA 2130013 A	11-03-1995
		EP 0807467 A	19-11-1997
		EP 0807468 A	19-11-1997
		JP 7151764 A	16-06-1995
		US 5616301 A	01-04-1997
		US 5795547 A	18-08-1998
EP 0236069 A	09-09-1987	AT 152529 T	15-05-1997
		AU 612316 B	11-07-1991
		AU 6918087 A	27-08-1987

INTERNATIONAL SEARCH REPORT

Information on patent family members

In International Application No

PCT/US 98/06189

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0236069 A		AU 653932 B	20-10-1994
		AU 7609291 A	12-09-1991
		CA 1339653 A	03-02-1998
		DE 3752057 D	05-06-1997
		DE 3752057 T	25-09-1997
		DE 776967 T	20-11-1997
		DK 97887 A	26-08-1987
		EP 0776967 A	04-06-1997
		GR 92300087 T	30-12-1992
		JP 2613877 B	28-05-1997
		JP 62240862 A	21-10-1987
		JP 7303468 A	21-11-1995
		US 5333675 A	02-08-1994
		US 5656493 A	12-08-1997
		US 5038852 A	13-08-1991
DE 4037955 A	06-06-1991	DE 8914300 U	18-01-1990
WO 9309486 A	13-05-1993	AU 2804792 A	07-06-1993
US 5410130 A	25-04-1995	NONE	
US 4865986 A	12-09-1989	EP 0363143 A	11-04-1990
		JP 2176910 A	10-07-1990
US 5040381 A	20-08-1991	NONE	
WO 9721089 A	12-06-1997	AU 1144997 A	27-06-1997
		CA 2207738 A	05-06-1997
		EP 0809796 A	03-12-1997
EP 0642828 A	15-03-1995	AT 166251 T	15-06-1998
		AU 671234 B	15-08-1996
		AU 7282094 A	30-03-1995
		CA 2130517 A	11-03-1995
		CN 1108154 A	13-09-1995
		DE 59405998 D	25-06-1998
		ES 2117743 T	16-08-1998
		JP 2764011 B	11-06-1998
		JP 7167865 A	04-07-1995

INTERNATIONAL SEARCH REPORT

Information on patent family members

In ternational Application No

PCT/US 98/06189

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0642828 A		NZ 264389 A US 5720406 A	25-06-1996 24-02-1998
EP 0640828 A	01-03-1995	AU 681682 B AU 7141494 A BR 9403338 A CA 2129787 A CN 1107892 A CZ 9402078 A FI 943936 A HU 71622 A JP 7163397 A NO 943166 A PL 304805 A SG 47865 A ZA 9406330 A	04-09-1997 09-03-1995 11-04-1995 28-02-1995 06-09-1995 15-11-1995 28-02-1995 29-01-1996 27-06-1995 28-02-1995 06-03-1995 17-04-1998 28-02-1995
WO 9527196 A	12-10-1995	AU 2122395 A US 5741463 A	23-10-1995 21-04-1998
US 5248934 A	28-09-1993	NONE	
US 4881038 A	14-11-1989	US 4825170 A AT 124541 T CA 1295680 A DE 68923281 D DE 68923281 T EP 0417173 A JP 3504538 T WO 8911650 A	25-04-1989 15-07-1995 11-02-1992 03-08-1995 22-02-1996 20-03-1991 03-10-1991 30-11-1989
US 5441576 A	15-08-1995	NONE	
US 5431021 A	11-07-1995	AU 5683294 A CN 1094500 A WO 9412833 A US 5385020 A	22-06-1994 02-11-1994 09-06-1994 31-01-1995
US 5385022 A	31-01-1995	AU 7724794 A WO 9507441 A	27-03-1995 16-03-1995

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/06189

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0362173 A	04-04-1990	SE 464595 B	13-05-1991
		AT 108276 T	15-07-1994
		CA 1337304 A	10-10-1995
		DE 68916606 D	11-08-1994
		DE 68916606 T	10-11-1994
		ES 2059824 T	16-11-1994
		JP 2122226 A	09-05-1990
		JP 2732307 B	30-03-1998
		SE 8803459 A	30-03-1990
		US 5143451 A	01-09-1992
US 5600575 A	04-02-1997	NONE	
US 4639883 A	27-01-1987	NONE	
US 5237821 A	24-08-1993	JP 2033576 A	02-02-1990
		JP 2542239 B	09-10-1996
		EP 0377740 A	18-07-1990
		WO 8901594 A	23-02-1989
		JP 1131856 A	24-05-1989
		JP 2522692 B	07-08-1996